



Min. - Max. CFM	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*		
		200 - 700	200 - 590	200 - 390
Min. - Max. Sones	0.8 - 6	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.		




ACT™ **POWERWAVE™**

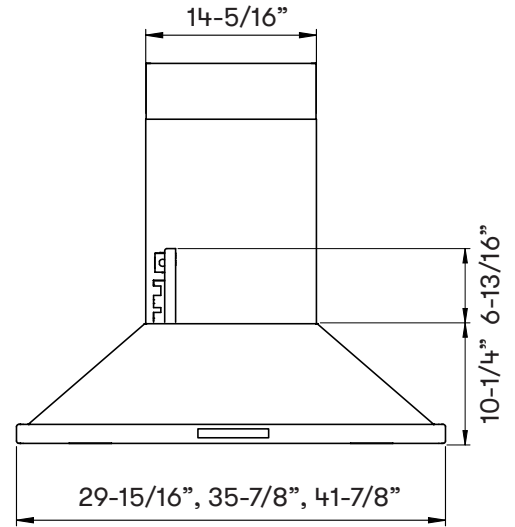

FRONT

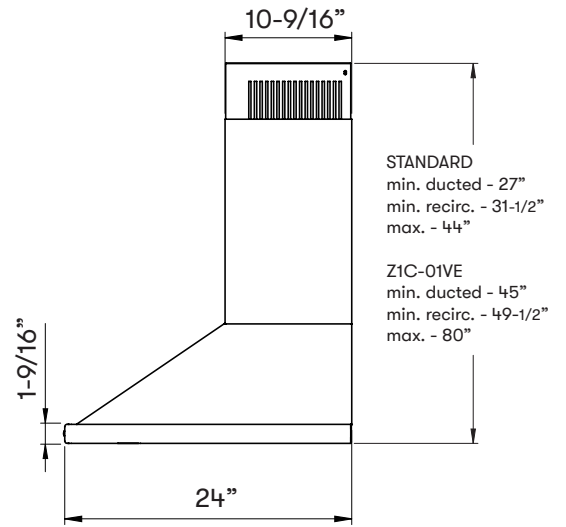

SIDE

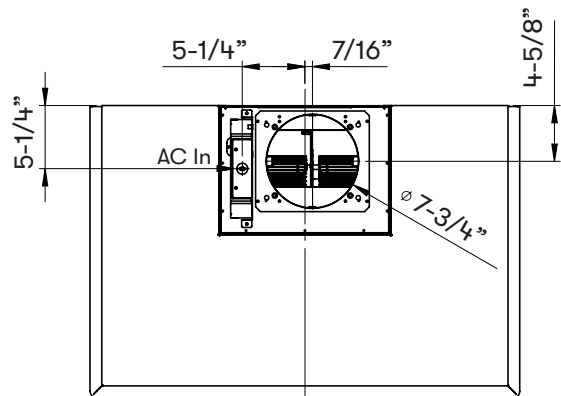

C/L

TOP

MODEL									
Stainless Steel Size	ZVE-E30DS 30"	ZVE-E36DS 36"	ZVE-E42DS 42"						
BLOWER PERFORMANCE									
Blower CFM (Min. - Max.)	200 - 700	200 - 700	200 - 700						
Sones (Min. - Max.)	0.8 - 6	0.8 - 6	0.8 - 6						
ACT 590 CFM (Min. - Max.)	200 - 590	200 - 590	200 - 590						
ACT 390 CFM (Min. - Max.)	200 - 390	200 - 390	200 - 390						
ACT 290 CFM (Min. - Max.)	200 - 290	200 - 290	200 - 290						
FEATURES									
Zephyr Connect App Compatible	Yes	Yes	Yes						
Alexa & Google Home Compatible	Yes	Yes	Yes						
ACT™ Technology	590, 390, 290	590, 390, 290	590, 390, 290						
Controls	Proximity Touch	Proximity Touch	Proximity Touch						
Speed Levels	6*	6*	6*						
Auto Delay-Off	Yes	Yes	Yes						
CleanAir Function	Yes	Yes	Yes						
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x2						
Tri-Level Lighting	Yes	Yes	Yes						
Filters	Baffle x2	Baffle x2	Baffle x2						
Recirculating Option	Yes	Yes	Yes						
Extension Duct Cover Option	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling						
ADA Compliant	Yes, with Zephyr Connect or Remote	Yes, with Zephyr Connect or Remote	Yes, with Zephyr Connect or Remote						
DUCT SPECIFICATIONS									
Vertical Internal Blower	8" Round	8" Round	8" Round						
Horizontal Internal Blower	NA	NA	NA						
AC POWER	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A						
OPTIONAL ACCESSORIES									
Wireless Remote Control	14000005	14000005	14000005						
Recirculating Kit	ZRC-03VE	ZRC-03VE	ZRC-03VE						
Extension Duct Cover	Z1C-01VE	Z1C-01VE	Z1C-01VE						
Stainless Steel Telescopic Backsplash	AK1710	AK1716	AK1712						
Make-Up Air Kit	MUA008A	MUA008A	MUA008A						
MOUNTING HEIGHT RANGE**	24" - 34"	24" - 34"	24" - 34"						
WARRANTY									
	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor						
CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height*	24" - 33"	24" - 34"	28" - 34"	34" - 34"	NA	NA	NA	NA
	Recirc Mounting Height*	24" - 28.5"	24" - 34"	28" - 34"	34" - 34"	NA	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height*	NA	NA	24" - 27"	24" - 33"	24" - 34"	24" - 34"	24" - 34"	28" - 34"
	Recirc Mounting Height*	NA	NA	NA	24" - 28.5"	24" - 34"	24" - 34"	24" - 34"	28" - 34"

\*When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 5 speeds, ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



#### Zephyr Connect App

Zephyr Connect App allows you to control your range hood from anywhere using your mobile device. It includes real time diagnostics and provides important product information. All you need is a WiFi connection with access to the internet. It seamlessly integrates with your smart devices such as Amazon Alexa or Google Home smart speaker for voice activation. Available to download from Google Play or the App Store.



#### Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

#### PowerWave™ 3-Phase Blower Technology

delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency.