

PUCBL430SS

YALE
APPLIANCE




With a compact 4 ¾" height, this model is an ideal choice where under-cabinet space is limited. An upgraded 4-speed, 400 CFM internal blower provides sufficient ventilation power for most kitchens. It also offers convenient LED Lights, dishwasher-safe, stainless steel baffle slot filters and a Black Panel touch control.

Available in 30" width, this model is designed for standard ducted installation, and can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

MOUNTING HEIGHT RANGE

↓ ↑ ↓ ↑
≥ 24" ≥ 30"

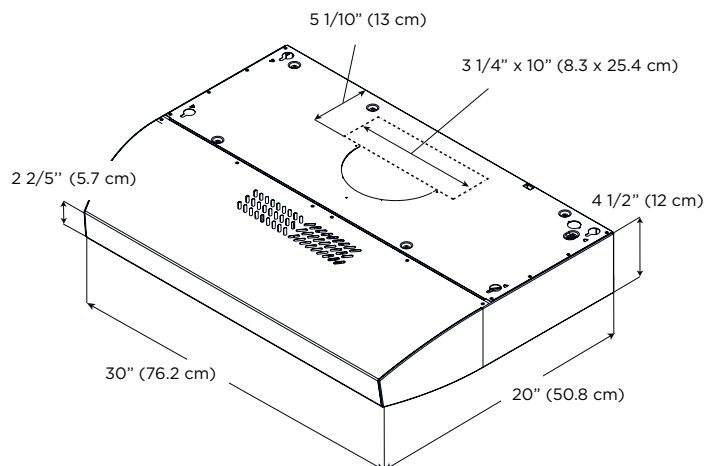

PUCBL430SS



SPECIFICATIONS

Model:	PUCBL430SS
Dimensions:	30"W x 20"D x 4 1/2"H
Blower Type(internal):** Power (CFM): Noise (sones):	400 CFM, 4-Speed Min: 1, Max: 6.1
Finish:	Stainless Steel
Controls:	Black Panel Touch control
Illumination:	2 LED Lights, 2.1 Watts, 4000 Kelvin, 180 lumens/lamp
Grease Filter:	Dishwasher-Safe, Stainless Steel Baffle Slot Filters (2)
Installation Type:	Ducted or Recirculating Installation (Recirculating Kit Sold Separately)
Duct Transition:	3 1/4" x 10" with Back Draft Damper (top or rear), or 7" Round (top) sold separately
Electrical:	120 V – 60 Hz, 445 Watts
KITS: Recirculating Kit	ACC02178A
WARRANTY:	Two (2) years parts & in-home labor

FEATURES

	STAINLESS STEEL BAFFLE SLOT FILTERS - With a baffle shape and a mesh backing, it allows airflow while preventing grease from passing through. Grease is collected in the baffle cavities with high capacity.		AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.
	LED LIGHTING - High Quality LED with 20,000 hours of lifespan allows a significant energy saving.		Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



Certified Ratings	High Speed	Working Speed	Duct Size
CFM Sones	380 8.5	150 1.5	3.25 x 10" (Horizontal)
CFM Sones	370 9	150 2	3.25 x 10" (Vertical)
CFM Sones	390 7	160 1	7" vertical

* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.