




For homeowners who are passionate about the culinary arts, the seamless welded corner craftsmanship, traditional styling and gleaming stainless steel of this hood, provides the look and performance expected from a professional-grade range hood.

With the new backlit hidden knob controls and traditional baffle filters, It is available in 30", 36" and 48" widths and equipped with a 600 CFM (30") or 1200 CFM blower (36", 48") to support all cooking needs. Designed for standard ducted ventilation only.

MOUNTING
HEIGHT RANGE

± ±
≥ 24" ≥ 30"

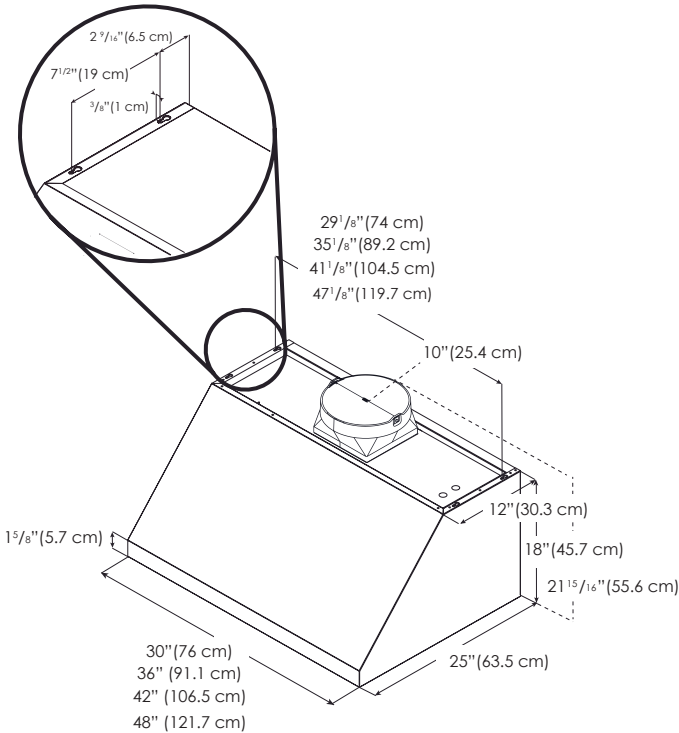

SPECIFICATIONS

Widths:	30" UNIT	36" UNIT	48" UNIT
Model:	PWLCL630SS	PWLCL136SS	PWLCL148SS
Dimensions:	30"W x 25"D x 18"H	36"W x 25"D x 18"H	48"W x 25"D x 18"H
Blower Type(internal):** Power (CFM): Noise (sones):	Min: 180, Max: 600 CFM Min: 1.5, Max: 7.0	Min: 340, Max: 1200 CFM Min: 2, Max: 8.5	Min: 340, Max: 1200 CFM Min: 2, Max: 8.5
Finish:	Stainless steel		
Controls:	Fully retractable rotating knobs with white backlighting		
Illumination:	2 LED, 7.5 W 3000 KELVIN 540 lumens		4 LED, 7.5 W
Grease Filter:	Professional stainless steel baffle 2 with 30" and 36" & 3 with 48"		
Duct Transition:	10" round transition, optional 8" round transition included		
Installation Type:	Ducted or Recirculating with Kit		
Electrical:	120V - 60 Hz, 463 Watts	120V - 60 Hz, 913 Watts	120V - 60 Hz, 926 Watts
KITS:			
Long Chimney Extension Kit 6":	ACC02159	ACC2158	ACC2164
Long Chimney Extension Kit 12":	ACC02160	ACC02161	ACC02165
Heat lamps	ACC0155106	ACC0155107	ACC0155111
Stainless steel Backsplash & warm racks	ACC0142864	ACC0142867	ACC0142870
External Blower Shell Kit		ACC0179547 (8" or 10" duct size compatible)	
Inline Blower Shell Kit		ACC0179549 (8" or 10" duct size compatible)	
Recirculating Kit:	ACC0192765 (4 round carbon filters) + ACC0192763 (10" round metal deflector)		
10" to 8" Transition Kit:	ACC0185271		
WARRANTY:	Two (2) years parts & in-home labor		

FEATURES



QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking. Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with blowers ranging from 600 to 1200 CFM.



Width	Certified Ratings	High Speed	Working Speed	Duct Size
30"	CFM Sones	490 8.5	180 1.5	10" Vertical
36" 48"	CFM Sones	910 12.5	340 2	10" Vertical

* The product images shown are for illustration purposes only and may not be an exact representation of the product.
** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.