




This model provides professional grade performance, while being discreetly mounted inside the cabinetry. Available with a 600 CFM blower for extraordinary ventilating power. Plus the All-In-One design avoids the need to purchase a stainless liner. Hidden metallic in/out knob controls operate the 4-speed blower and LED lighting. A cleaner kitchen is ensured by angled professional baffle filters.

MOUNTING HEIGHT RANGE



 $\geq 24'' \geq 30''$

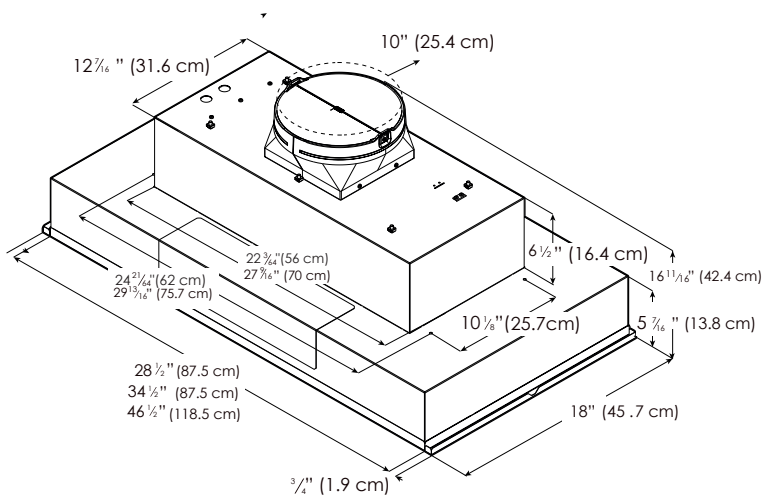

SPECIFICATIONS

WIDTH:	28" Unit	34" Unit	46" Unit
Model:	PINTR628SS	PINTR634SS	PINTR146SS
Dimensions:	28 1/2"W x 18"D x 11 1/2"H	34 1/2"W x 18"D x 11 1/2"H	46 1/2"W x 18"D x 11 1/2"H
Blower Type(internal):** Power (CFM): Noise (sones):	600 CFM (4-speed) Min: 1.5 Max: 7.0	600 CFM (4-speed) Min: 1.5 Max: 7.0	1200 CFM (4-speed) Min: 1.5 Max: 8.5
Finish:	Stainless Steel		
Controls:	Fully retractable rotating knobs with white backlighting		
Illumination:	2 LED, 7.5 W 3000 Kelvin, 540 lumen/lamp		
Filter Type:	Dishwasher-Safe, Professional Stainless Steel 2 for 28", 34" & 3 for 46"		
Duct Transition:	10" round transition, optional 8" round transition included		
Installation Type:	Ducted or Recirculating with kit		
Electrical:	120V - 60 Hz		
KITS			
External Blower Shell Kit:	ACC0179547 (8" or 10" duct size compatible)		
Inline Blower Shell Kit:	ACC0179549(8" or 10" duct size compatible)		
Recirculating Kit:	ACC0192765 (4 round carbon filters) + ACC0192763 (10" round metal deflector)		
Transition Reducer Kit:	ACC0185271 (10" round down to 8" round)		
WARRANTY:	Two (2) years parts & in-home labor		

FEATURES



QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking. Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with blowers ranging from 600 to 1200 CFM.



Width	Certified Ratings	High Speed	Working Speed	Duct Size
46"	CFM Sones	860 12.5	320 2	10" (Vertical) 10" (Vertical)
28" 34"	CFM Sones	500 9.5	180 2	10" (Vertical) 10" (Vertical)

* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** Blower performance indicates the performance of the blower by itself. Performance claims are not AHAM certified but were established in accordance with HVI Standardized test procedure. For Certified Ratings, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.