


24" Marvel Outdoor Refrigerator

Model # MO24RAS1*

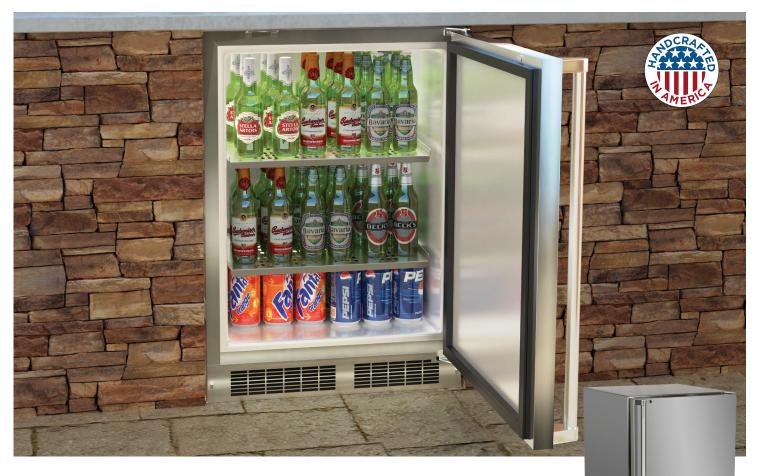

Premium Features

- Dynamic Cooling Technology[™] rapidly cools and delivers the industry's most even temperature stability
- Marvel Prime[™] controls for precise, frost-free temperature management between 34° and 42° F
- Audible alarms for door ajar and high/low temperature ensure your contents stay at optimal temperature
- Thermal-efficient insulated cabinet ensures optimum energy efficiency and cooling performance
- Two fully-adjustable, cantilever FreshFlo[™] stainless steel shelves
- Door lock provides added security
- Efficient white LED lighting illuminates arctic white interior
- Close Door Assist System[™] gently finishes closing the door

- Corrosion-resistant stainless steel exterior, sturdy pro-style handle and rugged 4" adjustable flat toe grill
- Height adjustment up to 1" with leveling legs
- 1-year warranty

Storage Capacity

Up to 154 12-oz cans 5.3 cu. ft.

Storage Configuration


(2) cantilever, fully adjustable FreshFlo[™] stainless steel commercial-grade steel shelves

Product Dimensions

23 7/8" W x 33 3/4" minimum H x 26 7/32" D (including handle)

Ordering Details*	Model Number
Solid Stainless Steel Door with Lock, Right Hinge	MO24RAS1RS
Solid Stainless Steel Door with Lock, Left Hinge	MO24RAS1LS

The Essential Elements of Outdoor Living



Dynamic Cooling Technology[™]

Specifications				
Width	23 7%"			
Interior Finish	White			
Capacity	Up to 154 12-oz cans			
Shelving System	Cantilever			
Shelf Fronts	Stainless Steel			
Interior Lighting	2 White LED Pods			
Handle	Professional			
Temperature Range	34° - 42° F			
Lock	Yes			
Length of Power Cord	5'			
Product Dimensions without Door	23 7/8" W x 33 3/4" H x 21 1/2" D			
Depth to Front of Door	23 ²³ / ₃₂ "			
Depth to Handle	26 ⁷ / ₃₂ "			
Depth with door at 90°	46 ¹³ / ₃₂ "			
Shipping Weight	160lbs			






Corrosion-resistant stainless steel exterior. sturdy pro-style handle and rugged toe kicks




Energy-efficient appliances with precise temperature management



Security locks standard on all refrigerators and dispensers





24" Rough-In Dimensions		Cabinet Dimensions			
"A"	"B"	"С"	"D"	"E"	"F"
24" (61 cm)	34" to 35" (86.4 cm to 88.9 cm)	24" (61 cm)	23 ⁷ ⁄ ₈ " (60.7 cm)	33 ³ ⁄ ₄ " to 34 ³ ⁄ ₄ " (85.7 to 88.3 cm)	23 ²³ / ₃₂ " (60.2 cm)
			"G"	"H"	"]"
			26 ⁷ / ₃₂ " (66.6 cm)	46 ¹³ / ₃₂ " (117.9 cm)	26 ⁷ / ₁₆ " (67.2 cm)