## DRR3090LAP

### **30-INCH REFRIGERATOR COLUMN, LEFT-HINGE** MODERNIST, PANEL-READY







#### FEATURES & BENEFITS

- Full height door with true flush cabinet integration without exposed venting grille • SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push
- for a luxuriously convenient experience Internal Water Dispenser for easy access to clean, filtered water
- iQ RemoteView™ Cameras (Wi-Fi) enables users to check what's
- in your fridge from your phone

TEMPERATURE RANGES	
Refrigerator	34°F (1°C) to 44°F (7°C)
Refrigerator - Power Cool	34°F (1°C)
FreshZone™ Drawer	37°F (3°C) / 33°F (1°C) /29°F (-1°C)


ACCESSORIES (OPTIONAL)	
Graphite Stainless Steel - 30" Panel (Left Hinge)	RAC30DPLHMS
Graphite Stainless Steel - 30" Kick Plate	RAC30TKBBMS
Graphite Stainless Steel - Modernist Handle	RACOOMHAAMS
Silver Stainless Steel - 30" Panel (Left Hinge)	RAC30DPLHSR
Silver Stainless Steel - 30" Kick Plate	RAC30TKBBSR
Silver Stainless Steel - Modernist Handle	RACOOMHAASR
Silver Stainless Steel - Dacor Pro Handle	RACOOPHAASR
Pair Installation Kit	RACOOCPAAAA
Water Filter	RACOOWFAAAA
Deodorizing Filter	RACOODFAAAA

GENERAL PROPERTIES	
Panel Ready	Yes
Door Swing	Left
Push-To-Open™ Door Assist	Yes
Internal Water Dispenser	Yes
iQ RemoteView™ Camera	Yes (2 ea)
Deodorizing Filter	Yes
Lighting	3DLighting™
Interior Material	SteelCool™ Stainless Steel Interior
Full Width Shelves	4 ea
Shelf Material	Tempered, Metal Trim, Spill- Proof
Full Extension Drawers at 90° Door Opening Angle	Yes
FreshZone™ Drawer	Yes - Cheese (37°F) / Cold Drinks (33°F) / Meat (29°F)
Humidity Control Drawer	2 ea
Door Bins	4 ea
Door Open Alarm	Yes
Special Modes	Sabbath Mode
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	17.8 cu. ft.
Refrigerator Gross Capacity (cu. ft.)	17.8 cu. ft.
PERFORMANCE	
Dedicated Evaportator & Compres- sor System	Yes
Power Cool	Yes
Precise Cooling	Minimized temperature fluc- tuation ±0.36°F* (±0.2°C*)
TECHNICAL DETAILS	
Current (A)	3
Volts (V)	115
Frequency (Hz)	60
Power Cord Length (in.)	78.34"
Plug Type	120V, 3 Prong
DIMENSIONS & WEIGHT	
Appliance dimensions (H x W x D) (in.)	83 3/8" x 29 5/8" x 23 13/16"
Required Cutout Size (H x W x D) (in.)	84" x 30" x 25"
Net Weight (lbs)	472
EFFICIENCY	
ENERGY STAR Qualified	Yes
Annual Energy Consumption	280 kWy/year
WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refriger- ator	2 Year
Limited Warranty for Sealed Refrig- eration System; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrig- eration System; Parts Only	7th to 12th Year


## DRR3090LAP

**30-INCH REFRIGERATOR COLUMN, LEFT-HINGE** MODERNIST, PANEL-READY




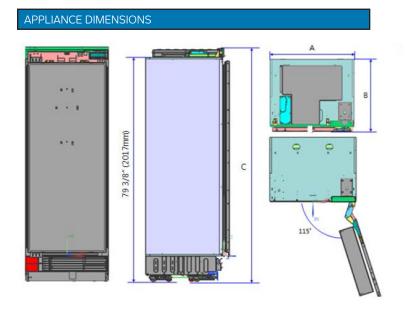

#### INSTALLATION CUTOUT DIMENSIONS

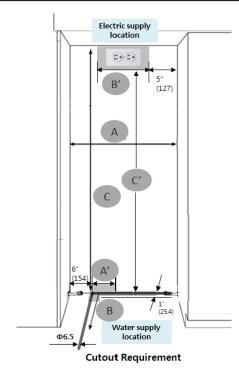

### CUSTOM PANEL DIMENSIONS



	30"
A (Width)	29 5/8" (752mm)
B (Depth)	23 13/16" (605mm)
C (Height)	83 3/8"" (2118mm)

	30"
A (Width)	30" (762mm)
B (Depth)	25" (635mm)
C (Height)	84" (2134mm)
A'	6" (152mm)
Bʻ	20" (508mm)
C'	80" (2032mm)

	30"
A-1 (Width)	29 3/4" (756mm)
A-2 (Height)	79 7/8" (2029mm)
A-3 (Depth)	3/4" (19mm)
Max Weight	88.0 lbs. (40kg)

## **DRR3090RAP**

**30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE** MODERNIST, PANEL-READY







#### FEATURES & BENEFITS

- Full height door with true flush cabinet integration without exposed venting grille • SteelCool™ Stainless Steel Interior Illuminated by 3DLighting™
- Push-To-Open™ Door Assist opens the door upon a slight push
- for a luxuriously convenient experience Internal Water Dispenser for easy access to clean, filtered water
- iQ RemoteView™ Cameras (Wi-Fi) enables users to check what's
- in your fridge from your phone

TEMPERATURE RANGES	
Refrigerator	34°F (1°C) to 44°F (7°C)
Refrigerator - Power Cool	34°F (1°C)
FreshZone™ Drawer	37°F (3°C) / 33°F (1°C) /29°F (-1°C)


ACCESSORIES (OPTIONAL)	
Graphite Stainless Steel - 30" Panel (Right Hinge)	RAC30DPRHMS
Graphite Stainless Steel - 30″ Kick Plate	RAC30TKBBMS
Graphite Stainless Steel - Modernist Handle	RACOOMHAAMS
Silver Stainless Steel - 30″ Panel (Right Hinge)	RAC30DPRHSR
Silver Stainless Steel - 30" Kick Plate	RAC30TKBBSR
Silver Stainless Steel - Modernist Handle	RACOOMHAASR
Silver Stainless Steel - Dacor Pro Handle	RACOOPHAASR
Pair Installation Kit	RACOOCPAAAA
Water Filter	RACOOWFAAAA
Deodorizing Filter	RACOODFAAAA

GENERAL PROPERTIES	
Panel Ready	Yes
Door Swing	Right
Push-To-Open™ Door Assist	Yes
Internal Water Dispenser	Yes
iQ RemoteView™ Camera	Yes (2 ea)
Deodorizing Filter	Yes
Lighting	3DLighting™
Interior Material	SteelCool™ Stainless Steel Interior
Full Width Shelves	4 ea
Shelf Material	Tempered, Metal Trim, Spill- Proof
Full Extension Drawers at 90° Door Opening Angle	Yes
FreshZone™ Drawer	Yes - Cheese (37°F) / Cold Drinks (33°F) / Meat (29°F)
Humidity Control Drawer	2 ea
Door Bins	4 ea
Door Open Alarm	Yes
Special Modes	Sabbath Mode
CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	17.8 cu. ft.
Refrigerator Gross Capacity (cu. ft.)	17.8 cu. ft.
PERFORMANCE	
Dedicated Evaportator & Compres- sor System	Yes
Power Cool	Yes
Precise Cooling	Minimized temperature fluc- tuation ±0.36°F* (±0.2°C*)
TECHNICAL DETAILS	
Current (A)	3
Volts (V)	115
Frequency (Hz)	60
Power Cord Length (in.)	78.34"
Plug Type	120V, 3 Prong
DIMENSIONS & WEIGHT	
Appliance dimensions (H x W x D) (in.)	83 3/8" x 29 5/8" x 23 13/16"
Required Cutout Size (H x W x D) (in.)	84" x 30" x 25"
Net Weight (lbs)	472
EFFICIENCY	
ENERGY STAR Qualified	Yes
Annual Energy Consumption	280 kWy/year
WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refriger- ator	2 Year
Limited Warranty for Sealed Refrig- eration System; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrig- eration System; Parts Only	7th to 12th Year


# DRR3090RAP

**30-INCH REFRIGERATOR COLUMN, RIGHT-HINGE** MODERNIST, PANEL-READY




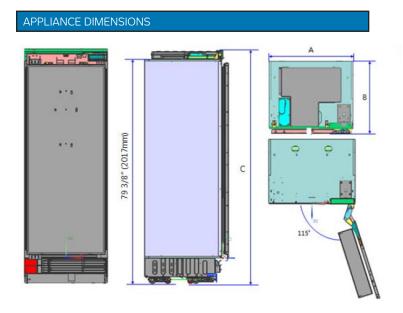

#### INSTALLATION CUTOUT DIMENSIONS

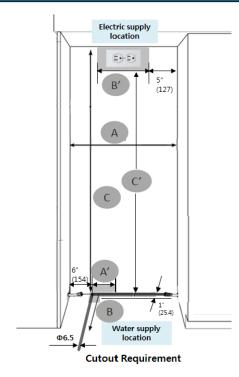

### CUSTOM PANEL DIMENSIONS



	30"
A (Width)	29 5/8" (752mm)
B (Depth)	23 13/16" (605mm)
C (Height)	83 3/8"" (2118mm)

	30"
A (Width)	30" (762mm)
B (Depth)	25" (635mm)
C (Height)	84" (2134mm)
A'	6" (152mm)
B′	20" (508mm)
C'	80" (2032mm)

	30"
A-1 (Width)	29 3/4" (756mm)
A-2 (Height)	79 7/8" (2029mm)
A-3 (Depth)	3/4" (19mm)
Max Weight	88.0 lbs. (40kg)