



Color Variants

CM470711
stainless steel-backed full glass door
Width 24" (60 cm)

Included accessories

1 x assembly screws.
1 x scoop.
1 x test strip.
1 x milk container (insulated).
1 x connection hose for milk frother.
1 x milk pipe.

CM470711
400 series fully automatic espresso machine
stainless steel-backed full glass door
Width 24" (60 cm)
Controls on top

Handleless door / automatic door opening
Fixed inlet and outlet water connection
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
Panel-free appliance with surface control module
One-touch operation
Personalization function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
Espresso / 2 x Espresso.
Espresso Macchiato / 2 x Espresso Macchiato.
Coffee / 2 x Coffee.
Americano / 2 x Americano.
Caffe Latte / 2 x Caffe Latte.
Latte Macchiato / 2 x Latte Macchiato.
Cappuccino / 2 x Cappuccino.
Flat White / 2 x Flat White.
Milk froth / 2 x Milk froth.
Warm milk / 2 x Warm milk.
Hot water / 2 x Hot water.

Operation

One touch control panel and an interactive visual display.
Rotary knob and TFT touch display operation.
Clear text display in 25 languages.
Personalization function, up to 8 beverages can be personalized and memorized.
4 beverage size settings from small to extra large; can be individually adjusted to match the size of the cup.
8 coffee strength levels from very mild to extra strong.
Coffee: 3 grades.
Hot water: 10 grades.
4 coffee-milk ratio levels.
Adjustable grinding level.
Height-adjustable coffee dispenser 2 3/4" - 5 7/8".
Easy access to water tank, milk and coffee bean container behind the door.

Features

Non-wearing grinding unit with ceramic discs.
Separate drawer for second ground coffee type.
Water pump with 275 psi (19 bar) pressure.
Double grinding and brewing cycles for two beverages.
For double beverage order, two grinding and brewing cycles.
Beverage dispenser with integrated milk system.
Insulated stainless steel milk container for up to 17 oz. (0.5 litres).
Integrated LED lighting.
Removable bean container with aroma protecting lid for 1.1 lbs., allows for an effortless exchange of different types of coffee beans.
Automatic adjustment of ground coffee quantity.
Removable 2.5 quarts (2.4 liter) (2.4 litre) water tank.

Product Features
Frothing nozzle
No
Hot water spout
No
Adjustable programs
Brewing temperature, Coffee powder quantity per cup, Grinding factor, Water hardness, Water quantity per serving
Standby function
Yes
Pump pressure (bar)
19
Simultaneous preparation of 2 cups
Yes
Included accessories
1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories

Consumption and connection features

Product group
Built-in coffee machine
Brand
Gaggenau
Product name / series name
SKU
CM470711
UPC code
825225956532
Variant color
Stainless steel
Typology
Fully automatic
Watts (W)
1600
Current (A)
10
Volts (V)
120
Frequency (Hz)
60
Approval certificates
UL
Power Cord Length
39"
Plug type
Gardy plug w/ earthing
Reccommended height for installation (in)
17 11/16"
Overall appliance dimensions (HxWxD) (in)
17 59/64" x 23 15/64" x 21 5/32"
Dimensions of the packed product (in)
Net weight (lbs)
82
Gross weight (lbs)
92
Capacity water container (l)
2.4
Dimensions of the pallet (in)
2019-07-10
Page 1

Electronic water filter exchange indicator.
Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Cleaning

Fully automatic rinse program when machine is turned on/off.
Automatic steam cleaning of the milk system after every beverage.
Automatic cleaning and descaling program.
Emptying program to prepare the appliance for holiday or transportation.
Removable brewing unit.
Coffee residue container and drip tray dishwasher-safe.
Beverage dispenser dishwasher-safe.

Planning notes



Ideal installation height 3.1 ft - 4.8 ft. (top edge of bottom niche).
The front of the appliance extends 1 7/8" from the furniture cavity.
When installing in a corner a side clearance is required.
Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 13 3/4".
Door opening angle appr. 155° - mounting distance to the wall has to be at least 25 9/16".
Door opening angle appr. 92° - mounting distance to the wall has to be at least 3 15/16" (spare part No. 00636455).
Installation directly above WS461 (5 3/8" tall) high warming drawer in 23 1/4" standard cut-out niche.
At no point may the outlet hose be positioned higher than the bottom edge of the appliance. The outlet hose must also be at least 150 mm lower than the appliance outlet (see drawing "drainage connection").
If the appliance is placed too far from the main siphon, the drain system has to be adjusted on-site (building installation).
The water connection (1) for the inlet hose must always be accessible and not located directly behind the appliance.
The connection of the outlet hose to the siphon (2) must not be directly behind the appliance and should be accessible.

Rating


Total rating 1.6 kW.
Connection cable 39" with plug.
Only cold water connection.
Inlet hose 165 cm with 3/4 " (26.4 mm) connection, extendable.
Outlet hose (ø 18 mm) 170 cm (HT-Hose).

CM470711
400 series fully automatic espresso
machine
stainless steel-backed full glass door
Width 24" (60 cm)
Controls on top
2019-07-10
Page 2

Top View

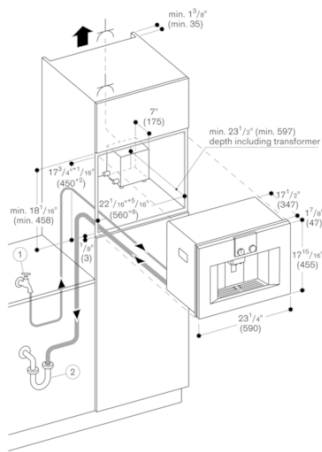

View from rear

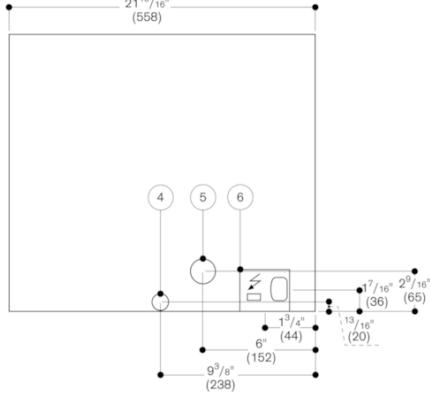

- (4) Water outlet
- (5) Cold-water connection
- (6) Electric terminal box

Drainage connection

