


POLK SIGNATURE ELITE ES90

DOLBY ATMOS-CERTIFIED ADD-ON HEIGHT SPEAKER

Dolby Atmos height modules for Signature Elite ES20, ES55, and ES60 and Signature S20, S55, and S60



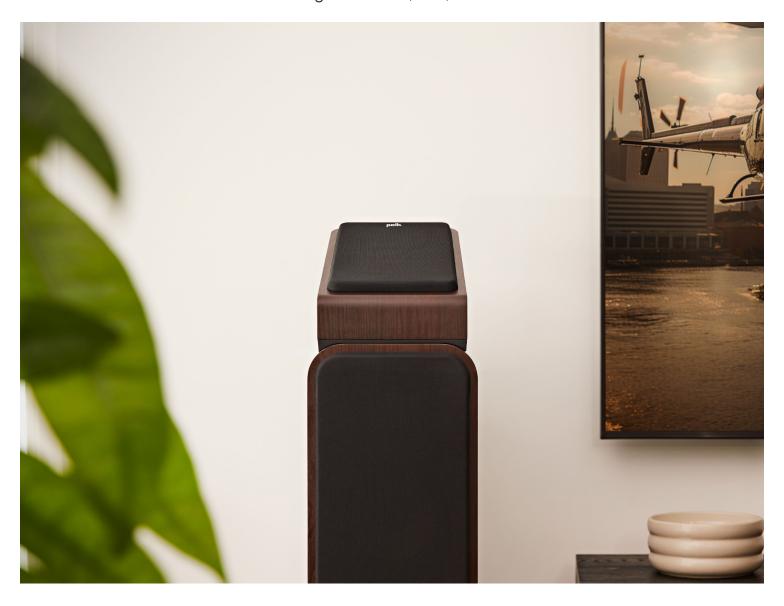

SPECIFICATIONS	
Speaker Type	Height (topper)
Quantity Included	Pair
Product Dimensions (W x H x D)	7.3 × 7.5 × 12.1 in. (186 × 189 × 306 mm)
Weight (one speaker)	8.3 lbs (3.76 kg)
Tweeter	1 in. (2.5 cm) Terylene dome
Midrange/Midbass	5.25 in. mica-reinforced polypropylene driver
Crossover Frequency	2200 Hz
Frequency Response	-10dB Frequency Limits: 52 Hz-40 kHz
	-3dB Frequency Limits: 142 Hz-26 kHz
Nominal Impedance	4Ω (8Ω compatible)
Recommended Amplifier Power	20–150W per channel
Sensitivity	85dB
Inputs	1 pair of 5-way binding posts (gold)
Certifications	Dolby Atmos
Speaker Compatibility	Signature Elite Series: ES55, ES60, ES20 Signature Series: S20, S55, S60
Package Dimensions (L × W × H)	7.3 × 7.5 × 12.1 in. (186 × 189 × 306 mm)
Package Weight	20.4 lbs (9.25 kg)

Consumer Benefits

The Ultimate Atmos Experience

Elevate immersive home theater experiences with Dolby Atmos-certified height modules.

A Perfect Fit

Modules attach securely atop Signature Elite ES20, ES55, and ES60 and Signature S20, S55, and S60 speakers.

Rich, Full-Range Overhead Effects

Timbre-matched 5.25" woofer and 1" Terylene dome tweeter for powerful, enveloping sound.

Simple System Setup

Easily connects to Dolby Atmos- or DTS:X-compatible home theater receivers.

Features

- Dolby Atmos-certified, DTS:X- and IMAX Enhanced-compatible height speaker pair
- Bring immersive overhead sound to movies, TV, music, and video games
- Fits Signature Elite ES20, ES55, and ES60 and Signature S20, S55, and S60 speakers
- Premium 1" Terylene tweeter presents crystal clear, defined highs
- Oversized 5.25" woofer delivers powerful, enveloping, full range sound
- Enjoy overhead effects from traditional soundtracks (compatible receiver req.)
- Timbre-matched with Signature Elite speakers for seamless sound
- Anti-resonant cabinet and anti-diffraction grille for premium sound
- Easy to pair with 4- and 8-ohm Atmos and DTS:X receivers
- Requires minimum seven-channel Dolby Atmos- or DTS:X-compatible AV receiver