

36" WALL CHIMNEY HOOD


DHW361



GENERAL PROPERTIES	
FINISH	STAINLESS STEEL
OPTIONAL ACCESSORIES	
RECIRCULATION KIT FOR DHI361	AVDHI
NUMBER OF MOTORS	
(1) SINGLE BLOWER	600 CFM
TECHNICAL INFORMATION	
CIRCUIT REQUIREMENTS	120VAC, 15AMP, GROUNDED DEDICATED, 3-WIRE CIRCUIT
TOTAL CONNECTED LOAD	120VAC/60HZ
MAX CURRENT DRAW	3.4 AMPS
MAX CURRENT DRAW SHIPPING WEIGHT	3.4 AMPS 66LBS
SHIPPING WEIGHT	

DHW MODEL

Tolerances: ±1/16" (±1.6 mm), -0 unless otherwise stated

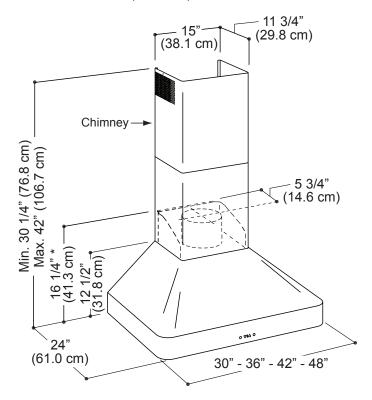

FEATURES & BENEFITS

- > 8" diameter exhaust. Can accommodate up to a 10" duct.
- → Squirrel cage style blower. 4 blower speeds.
- → Auto off setting after 4 hours.
- → Blue illuminated electronic control panel.
- → 10 minute Timer (motor runs for 10 minutes and then automatically shuts off).
- > 20 watt halogen lights (can be used w/ 10, 20, or 30w bulbs)
- → Easy-to-clean Baffle Filter System, dishwasher safe.
- → Hood can be installed to exhaust through the ceiling or rear wall

^{**}Warranty: Limited, parts and labor for one year