FISHER & PAYKEL

SPECIFICATION GUIDE

DOUBLE DISHDRAWER™ DISHWASHER





OVERVIEW

With a contemporary stainless steel finish, each drawer washes independently and fits a half load, so you can run one while you load the other.

MODELS

Double DishDrawer™ Dishwasher Stainless Steel DD24DAX9 N

SERIES & STYLE

Series 7 Contemporary Style

FEATURES

- DishDrawer™ Dishwashers are designed to match the
 Fisher & Paykel family of kitchen appliances
- $\begin{tabular}{ll} \hline \end{tabular} Six wash programs to suit any load, from Delicate to \\ \end{tabular} Heavy$
- 3 Quick and Extra Dry provide extra wash options
- Use both drawers independently, with the ability to select different wash programs
- S American Disabilities Act (ADA) compliant, this Double DishDrawer™ sits at an accessible height

ACCESORIES

- ① Cutlery basket
- ② Kickstrip

FISHER & PAYKEL


SPECIFICATION GUIDE

DOUBLE DISHDRAWER™ DISHWASHER

SPECIFICATIONS


| Model No. | DD24DAX9 N | |
|------------|--------------------------------------------------------------------------------|--|
| Dimensions | H 32 5/16" - 34 5/8" (820mm - 880mm) x W 23 9/16" (599mm) x D 22 9/16" (573mm) | |
| Weight | 51kg | |
| Electrical | | |
| Supply | 110-120V, 60Hz | |
| Service | 8.7A | |
| Receptacle | 3 prong grounding-type | |
| Plumbing | | |
| Supply | Supplied hose to suit 3/8" (9mm) male compression fitting | |
| Pressure | Max. 1 MPa (145 psi), min. 0.03 MPa (4.3 psi) | |
| | | |

PLUMBING AND ELECTRICAL

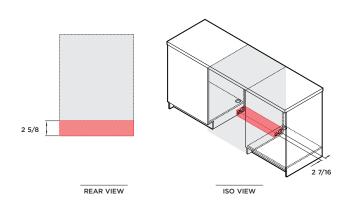

Service outlet at rear extends both sides, hoses and cords can be routed to either or both sides


PRODUCT DIMENSIONS



| | in | mm |
|----------------------------------------|------------------|-----------|
| Overall height* | 32 5/16 - 34 5/8 | 820 - 880 |
| B Overall width | 23 9/16 | 599 |
| © Overall depth | 22 9/16 | 573 |
| Height of upper front panel | 15 1/2 | 393 |
| E Height of lower front panel | 14 | 356 |
| F Depth of front panels | 13/16 | 20 |
| Depth of toe kick recess | 11/2 - 4 | 38 - 102 |
| Height from floor to front panel base* | 2 3/16 - 4 9/16 | 56 - 116 |
| Depth of open drawer | 21 9/16 | 547 |

 $^{^*}$ Depending on adjustment of levelling feet

CAVITY DIMENSIONS: STANDARD INSTALLATION



| | in | mm |
|-------------------|----------|-----------|
| Overall height* | 32 5/16 | 820 - 880 |
| B Overall width | 23 5/8 | 599 |
| © Overall depth** | 22 13/16 | 580 |

^{*}Depending on adjustment of levelling feet

^{**}Includes front panels