
18" COLUMN FREEZER


(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JBZFR18IGX, JBZFL18IGX – 177/8" x 837/16" x 2343/64" (without door/handles)

PRODUCT DIMENSIONS

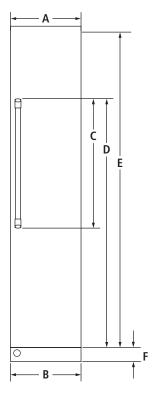

FRONT VIEW



TOP VIEW

MODEL #		JBZFR18IGX JBZFL18IGX	
		in	cm
Α	Width of door	173/4	45.1
В	Overall width	171/8	45.4
С	Height of door handle Pro-Style® Stainless Euro-Style Stainless Custom panel (3/4"/1.9 cm)*	45 ³⁵ / ₆₄ 50 ¹ / ₆₄ **	115.7 127.1 **
D	Height to top of door handle Pro-Style® Stainless Euro-Style Stainless Custom panel (3/4"/1.9 cm)*	66½ 68½ 6817/64 **	167.7 173.4 **
Е	Height of door	797/8	202.9
F	Height of bottom grille	335/64	9.0
G	Width of recessed freezer	17%16	44.6
н	Width from side of freezer to handle – door fully open 115° Pro-Style® Stainless Euro-Style Stainless Custom panel (¾"/1.9 cm)*	10 ⁴¹ / ₆₄ 10 ⁹ / ₆₄	27 25.8 **
ı	Width from side of freezer to handle – door open 90° Pro-Style® Stainless Euro-Style Stainless Custom panel (¾"/1.9 cm)*	4½2 3½6 **	10.2 87.4 **
J	Depth without door panel kit	2343/64	60.1
K	Depth with door Pro-Style® Stainless Euro-Style Stainless Custom panel (¾//1.9 cm)*	24½ 24½ 24½ 24½	62.2 62.2 62.2
L	Depth with handle Pro-Style® Stainless Euro-Style Stainless	27½ 27½ 26¼ 26 ¹⁷ / ₃₂	68.9 67.4
	Custom panel (¾"/1.9 cm)*	**	**
M	Depth with door open 90°	447/16	112.9

^{*}Custom panels should not exceed 3/4" (1.9 cm) thickness.


^{**}For custom panel models, this depends on handle chosen.

18" COLUMN FREEZER

(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JBZFR18IGX, JBZFL18IGX – 17%" x 83%6" x 23464" (without door/handles)

DIMENSIONS AS INSTALLED

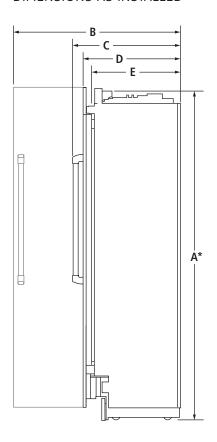

MODEL #		JBZFR18IGX JBZFL18IGX	
		in	cm
A *	Height of recessed freezer	8319/64	211.6
В	Depth with door open 90° (min.)	447/16	112.9
С	Depth with handle (min.) Pro-Style® Stainless	271//8	68.9
	Euro-Style Stainless	2617/32	67.4
	Custom panel (¾"/1.9 cm)**	t	†
D	Depth with door (min.) Pro-Style® Stainless	24½	62.2
	Euro-Style Stainless	241/2	62.2
	Custom panel (¾"/1.9 cm)**	241/2	62.2
Е	Depth without door panel kit (min.)	2343/64	60.1
+ 4 1	1411/25 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	P 1	r 11

^{*}Add 1" (2.5 cm) to the height dimension when leveling legs are fully extended.

SIDE VIEW

^{**}Custom panels should not exceed 3/4" (1.9 cm) thickness.


[†]For custom panel models, this depends on handle chosen.

18" COLUMN FREEZER


(BASE UNIT REQUIRES SUITE-COORDINATING PANEL KIT OR CUSTOM PANELS AND HANDLES)

JBZFR18IGX, JBZFL18IGX – 17%" x 83%6" x 23464" (without door/handles)

OPENING/CLEARANCE DIMENSIONS

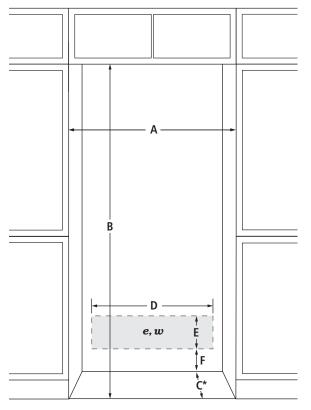

FRONT VIEW



MODEL #		JBZFR18IGX JBZFL18IGX		
		in	cm	
Α	Width (min.)	18	45.7	
В	Height (min.)	84	213.4	
C *	Depth (min.)	25	63.5	
D	Width of recommended electrical location	14	35.6	
E	Height of recommended electrical location	61/2	16.5	
F	Height to recommended electrical location	41/2	11.4	
e	Recommended electrical connection location			
w	Recommended water connection locatio	n		

^{*}A minimum 8" (20.3 cm) furniture return must extend behind the face of the cabinet on all sides.

ELECTRICAL REQUIREMENTS

115 volt, 60 Hz, AC only, 15- or 20-amp fused, grounded circuit is required. A dedicated circuit is recommended. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

WATER PRESSURE REQUIREMENTS

A cold water supply with water pressure between 40 and 120 psi (207 and 827 kPa) is required to operate the ice maker. Call a licensed, qualified plumber with any questions about the water pressure.

Reverse Osmosis Water Supply

A reverse osmosis system may be used provided that the water pressure from the filtration system meets the required water pressure requirements.

Jenn-Air® Columns feature an auto-bypass water filtration system. To use your product with a reverse osmosis water filtration system, simply remove the water filter from the product.

LOCATION REQUIREMENTS

Floor must be able to support the product's total weight of more than 600 lb (272 kg), including the door panels and contents of the product. Flooring under product must be at the same level as the room. Face of cabinetry must be plumb.

BACK VIEW