Café[™] Professional Series 27" Built-In Double Electric Convection Wall Oven

CKD70DP2NS1



DISTINCT BY DESIGN™





FEATURES & BENEFITS

Brighten up life in the kitchen - Easily navigate wall oven settings using a stunning full color display that adds an unexpected touch of style to your kitchen

Enjoy convenient temperature control from anywhere - Preheat while running errands or change oven temperatures while doing yard work with the Cafe Appliances Kitchen app

The oven rack that handles it all - Easily remove heavy dishes with a roller rack that is specially designed to glide smoothly and stay in the oven during the self-clean cycle, so you never have to handle cumbersome racks again

Prepare foods to perfect doneness - Get roasts and meats just right with a temperature probe that lets you monitor progress on the wall oven screen, eliminating the need to open the oven door during cooking

Clean up has never been easier - Keep your oven looking like new at all times with a steam clean option for small spills and a self clean cycle for larger messes

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

APPEARANCE

Color Appearance	Stainless Steel
Frameless Oven Door(s)	Stainless Steel
Oven Door Features	Big View Oven Window
Handle	Café Pro Style Brushed Stainless Customizable
Installation	Above Warming Drawer Side-by-Side

FEATURES

Cooking System	ble Oven European Convection (Upper) Clean with Steam Clean Option able with Delay Clean Option vection Bake vection bake Multi-Rack vection Roast rmal Broil Hi/Lo p Warm of n-to-cook comatic ull-Color Touch LCD Screen ass Broil Element ass Bake Element
Oven Cleaning Type Self-Cleaning Time Cleaning Time Variable Con Con Con Con The The Kee Process Con Con The Character Control Type Oven Cooking Modes Scal Self-Clean Oven Door Lock Control Type 7" Fit Self-Clean Control Type 8-Pe 10-P Oven Features Clos 2 Net Clean Control Type 2 Net Clos	Clean with Steam Clean Option able with Delay Clean Option vection Bake vection bake Multi-Rack vection Roast rmal Bake rmal Broil Hi/Lo p Warm of n-to-cook omatic ull-Color Touch LCD Screen ass Broil Element
Cleaning Time	able with Delay Clean Option vection Bake vection bake Multi-Rack vection Roast rmal Bake rmal Broil Hi/Lo p Warm of n-to-cook omatic ull-Color Touch LCD Screen
Con Con	vection Bake vection bake Multi-Rack vection Roast rmal Bake rmal Broil Hi/Lo p Warm of n-to-cook omatic ull-Color Touch LCD Screen
Con Con Con Con The The The Kee Proc Con Con	vection bake Multi-Rack vection Roast rmal Bake rmal Broil Hi/Lo p Warm of n-to-cook omatic ull-Color Touch LCD Screen ass Broil Element
Self-Clean Oven Door Lock Auto Control Type 7" F 8-Pe 10-P Oven Features Clos 2 Ne	omatic ull-Color Touch LCD Screen ass Broil Element
Control Type 7" F 8-Pe 10-P Oven Features Clos 2 Ne	ull-Color Touch LCD Screen
8-Pe 10-P Oven Features Clos 2 Ne	ass Broil Element
Oven Features Clos 2 Ne	ico Bron Element
	sed Door Broiling
	ever Scrub Roller Rack ever Scrub Flat Rack nbossed Rack Positions per oven
Aud Auto C° o Sab Con Coo Elec Rem	lour Shut-Off Capability ible Preheat Signal Do Recipe Conversion Te Programmable bath Mode trol Lock Capability K Time; Delay Time tronic Clock & Kitchen Timer otee Enabled perature Probe
WiFi Connect Built	'
Ama The IFTI Nes Droj	azon Alexa Google Assistant T t
Connected Capabilities Innit	
Cooking Technology Trac	vection Upper litional Lower
2 Ha Blac Oven Interior Hide	alogen Interior Oven Lights (Both Ovens)

CAPACITY

Capacity (Cu. Ft.)	4.3 Upper / 4.3 Lower
Total Capacity (cubic feet)	8.6 cu ft

POWER / RATINGS

Amp Rating at 208V	30
Amp Rating at 240V	30
Bake Wattage	2600W
Broiler Wattage	3400W
Convection Wattage	2400W
KW Rating at 208V	5.4
KW Rating at 240V	7.2

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	245 lb
Net Weight	224 lb
Overall Height	51-1/8 in
Overall Width	26-3/4 in
Overall Depth	26-5/8 in
Cabinet Width	27 in
Cutout Dimensions (w x h x d) (in.)	25-1/4 x 50-1/8 x 23-1/2
Oven Interior Dimensions (lower)	21-1/2 x 17-1/4 x 20
Oven Interior Dimensions (upper)	21-1/2 x 17-1/4 x 20

Café™ Professional Series 27" Built-In **Double Electric Convection Wall Oven**

CKD70DP2NS1



DISTINCT BY DESIGN

8-3/4" MAX.

Cutout depth 23-1/2" MIN

Junction box

location

44" to bottom of

junction box

OPTIONAL ACCESSORIES

27" Never Scrub Roller Rack	UXWORXR27
Large Broiler Pan	WB48X10056
60" Replacement Electrical Conduit	WB18T10574
72" Replacement Electrical Conduit	WB18T10580

WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS AND INSTALLATION INFORMATION


Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200°F (94°C).


If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with product for current dimensional data.



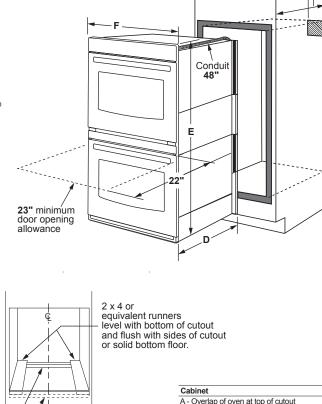

ADDITIONAL ACCESSORIES



CXWD7H0PNBZ **Brushed Bronze** 2 handles



CXWD7H0PNSS **Brushed Stainless** 2 handles



Suitable

(must support 400 lbs.)

bracing to support

runners

CXWD7H0PNBT **Brushed Black** 2 handles



CXWD7H0PNCU **Brushed Copper** 2 handles



B - Overlap of oven other side of edge of cutout

C - Overlap of oven at bottom of cutout

E - Overall height with trim

F - Overall width

Oven D - Install depth

CXWD7H0PNCG **Brushed Brass** 2 handles



23-1/2

51-1/8"

26-3/4"

CXWD7H0PNFB Flat Black 2 handles

Dimension and installation information are shown in inches.