



**CMP250711**  
**200 series fully automatic espresso machine**  
**Glass front in Gaggenau Metallic**  
**Width 24" (60 cm)**  
**Controls on top**

**Handleless door/soft-closing door system**  
**Continuous flow heater means no waiting time and constant brewing temperature**  
**Aroma brewing technology for a full aroma**  
**Single portion cleaning**  
**TFT touch display**  
**One-touch operation**  
**Personalization function**  
**7 light settings**  
**Electronic fill level control for milk, water and coffee to ensure a perfect result**

#### Type of beverage

Ristretto / 2 x Ristretto.  
 Espresso / 2 x Espresso.  
 Espresso Macchiato / 2 x Espresso Macchiato.  
 Coffee / 2 x Coffee.  
 Americano / 2 x Americano.  
 Caffè Latte / 2 x Caffè Latte.  
 Latte Macchiato / 2 x Latte Macchiato.  
 Cappuccino / 2 x Cappuccino.  
 Flat White / 2 x Flat White.  
 Milk froth / 2 x Milk froth.  
 Warm milk / 2 x Warm milk.  
 Hot water / 2 x Hot water.

#### Operation

Door with soft-closing system.  
 Rotary knob and TFT touch display operation.  
 Clear text display in 25 languages.  
 Personalization function, up to 8 beverages can be personalized and memorized.  
 4 beverage size settings from small to extra large; can be individually adjusted to match the size of the cup.  
 8 coffee strength levels from very mild to extra strong.  
 3 coffee and hot water temperature levels.  
 4 coffee-milk ratio levels.  
 Adjustable grinding level.  
 Height-adjustable coffee dispenser 2 3/4" - 5 7/8".  
 Easy access to water tank, milk and coffee bean container behind the door.

#### Features

Non-wearing grinding unit with ceramic discs.  
 Separate drawer for second ground coffee type.  
 Water pump with 275 psi ( 19 bar) pressure.  
 Double grinding and brewing cycles for two beverages.  
 Beverage dispenser with integrated milk system.  
 Insulated stainless steel milk container for up to 17 oz. ( 0.5 litres).  
 Integrated LED lighting.  
 Removable bean container with aroma protecting lid for 1.1 lbs., allows for an effortless exchange of different types of coffee beans.  
 Automatic adjustment of ground coffee quantity.  
 Removable 2.5 quarts (2.4 liter) ( 2.4 litre) water tank.  
 Electronic water filter exchange indicator.  
 Electronic fill level control for drip tray and container for coffee residue.

#### Safety

Child lock.

#### Product Features

**Frothing nozzle**  
 No  
**Hot water spout**  
 No  
**Adjustable programs**  
 Brewing temperature, Coffee powder quantity per cup, Grinding factor, Water hardness, Water quantity per serving  
**Standby function**  
 Yes  
**Pump pressure (bar)**  
 19  
**Simultaneous preparation of 2 cups**  
 Yes  
**Included accessories**  
 1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe

#### Optional accessories

#### Consumption and connection features

**Product group**  
 Built-in coffee machine  
**Brand**  
 Gaggenau  
**Product name / series name**  
 SKU  
 CMP250711  
**UPC code**  
 825225936985  
**Variant color**  
 Stainless steel  
**Typology**  
 Fully automatic  
**Watts (W)**  
 1600  
**Current (A)**  
 10  
**Volts (V)**  
 120  
**Frequency (Hz)**  
 50/60  
**Approval certificates**  
 UL  
**Power Cord Length**  
 39"  
**Plug type**  
 Gardy plug w/ earthing  
**Recommened height for installation (in)**  
 17 11/16"  
**Overall appliance dimensions (HxWxD) (in)**  
 17 15/16" x 23 1/4" x 16 3/4"  
**Dimensions of the packed product (in)**  
**Net weight (lbs)**  
 54  
**Gross weight (lbs)**  
 65  
**Capacity water container (l)**  
 2.4  
**Dimensions of the pallet (in)**  
 2019-07-10  
 Page 1

## Cleaning

Fully automatic rinse program when machine is turned on/off.  
 Automatic steam cleaning of the milk system after every beverage.  
 Automatic cleaning and descaling program.  
 Emptying program to prepare the appliance for holiday or transportation.  
 Removable brewing unit.  
 Coffee residue container and drip tray dishwasher-safe.  
 Beverage dispenser dishwasher-safe.

#### Planning notes

Ideal installation height 3.1 ft - 4.8 ft. (top edge of bottom niche).  
 Necessary lateral gap between appliance front and furniture panel of min. 3/16".  
 The door panel surface of the appliance extends 13/16" from the furniture cavity.  
 When installing in a corner a side clearance is required.  
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 13 3/4".  
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 25 9/16".  
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 3 15/16" (spare part No. 00636455).  
 Installation directly above WS461 (5 3/8" tall) high warming drawer in 23 1/4" standard cut-out niche.  
 Special accessories (order as spare parts):  
 Part No. 12008246 Water filter  
 Part No. 00311820 Descaling tablets  
 Part No. 00311823 Cleaning tablets  
 Part No. 00636455 Door hinge restrictor (92° opening angle)  
 Part No. 11015223 Bean container with lid

#### Rating

Total rating 1.6 kW.


CMP250711  
200 series fully automatic espresso  
machine

Glass front in Gaggenau Metallic  
Width 24" (60 cm)

Controls on top


2019-07-10  
Page 2

left corner installation

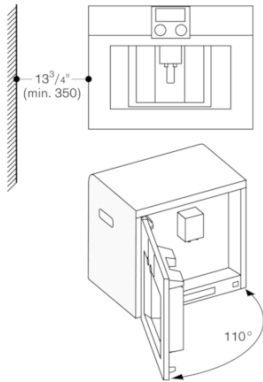

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance to the wall is only 3 15/16" (100 mm).

Corner installation left

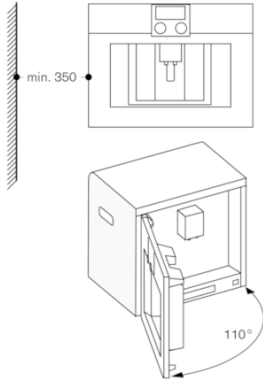

When using the 92° door hinge restrictor (Spare Part No. 00636455), the minimum distance to the wall is only 100 mm.

