



SÉURA OUTDOOR TVS

Ultra Bright

For sunny locations, Séura Ultra Bright™ Outdoor Displays provide industry-leading image quality and 1000-nit brightness for a remarkable picture in any lighting condition, including full-sun viewing.

IDEAL SPACE

Decks
Patios
Hot Tubs

DISPLAY SIZES

49 inch 4K UHD
55 inch 4K UHD
65 inch 4K UHD
86 inch 4K UHD

BACKLIGHT BRIGHTNESS

800-1000 cd/m2


TEMPERATURE RANGE

-40°F to 140°F



FULLY WEATHERPROOF

Séura Outdoor TVs are carefully designed and tested to thrive outside year-round, no matter how brutal the climate or conditions.



SLEEK AND CONTEMPORARY


Séura continues to lead the outdoor category in elegance, with sleek mirrored side panels that incorporate the TV into any designed outdoor environment combined with our signature svelte technology.



ADAPTIVE PICTURE TECHNOLOGY™

This proprietary and patent-pending technology continuously adjusts display backlight and contrast settings to present optimal video quality in changing lighting conditions with no input from the user.

CONNECTIONS

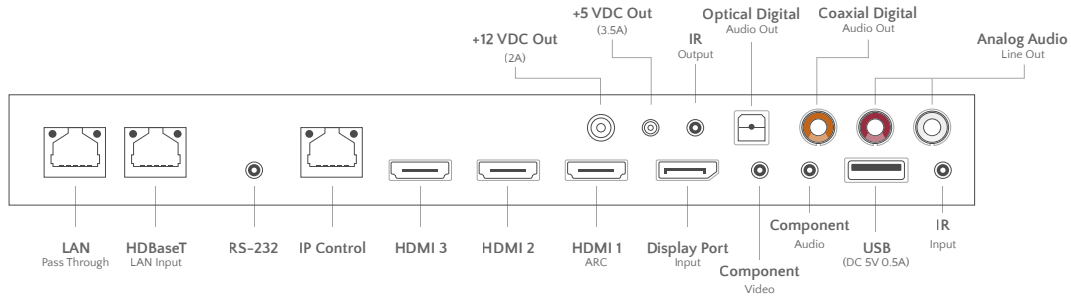

49 INCH 4K UHD
Model: STM3-49-U

55 INCH 4K UHD
Model: STM3-55-U

65 INCH 4K UHD
Model: STM3-65-U

86 INCH 4K UHD
Model: STM3-86-U

GENERAL	OPERATING TEMPERATURE RANGE	-40°F to 140°F*			
	OPTIMAL VIEWING TEMPERATURE RANGE	32°F to 122°F*			
	OPERATING HUMIDITY RANGE	10–90% RH, non-condensing			
	WATERPROOF RATING	IP54 Minimum Rating†			
	ISOTROPIC PREVENTION	High TNi panels help to prevent screen blackout			
VIDEO	DISPLAY RESOLUTION	3840 x 2160			
	FRAME RATE	60Hz			
	DISPLAY BRIGHTNESS	1000 cd/m2			800 cd/m2
	ASPECT RATIO	16:9	16:9	16:9	16:9
	CONTRAST RATIO	Typical 1100:1	Typical 1000:1	Typical 1100:1	Typical 1200:1
	TUNER	N/A	N/A	N/A	N/A
	RESPONSE TIME	8 ms	8 ms	8 ms	8 ms
	VIEWING ANGLE	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical	178° Horizontal/Vertical
	POWER CONSUMPTION, DISPLAY	Standby: 3.5W Heating: 200W Normal: 160W Max	Standby: 3.5W Heating: 200W Normal: 175W Max	Standby: 3.5W Heating: 200W Normal: 200W Max	Standby: 3.5W Heating: 345W Normal: 425W Max
	POWER CONSUMPTION, AC OUTLET	Max 200W			
	DC OUTPUT	Max 41.5W (12V 2A, 5V 3.5A)			
INTEGRATION	HDMI	3			
	HDBaseT™	1 Port with LAN Out			
	COMPONENT YPbPr	1			
	DISPLAY PORT	1			
	LAN PORT	1 (IP Control)			
	RS-232C	1			
	IR INPUT	1			
	IR OUTPUT	1			
	Service Port	1 (USB Type)			
	DC OUT	12V-Max 2A, 5V-Max 3.5A			
AUDIO	AUDIO: COMPONENT AUDIO INPUT	1			
	AUDIO: ANALOG LINE OUT	1			
	AUDIO: OPTICAL DIGITAL OUT	1			
	AUDIO: COAXIAL DIGITAL OUT	1			
	INTERNAL SPEAKERS	N/A			
INSTALLATION	PRODUCT DIMENSIONS	44.6" w x 26.1" h	50.0" w x 29.1" h	58.6" w x 34.0" h	77.0" w x 44.4" h
	PRODUCT DEPTH	3.7"	3.7"	3.7"	3.7"
	PRODUCT WEIGHT	61.1 lbs.	70.5 lbs.	96.1 lbs.	154.3 lbs.
	COMPARTMENT DIMENSIONS	11" w x 8" h x 1.5" d	11" w x 8" h x 1.5" d	11" w x 8" h x 1.5" d	11" w x 8" h x 1.5" d
	VESA PATTERN	400 x 400mm			600 x 400mm
OTHER	CERTIFICATIONS AND COMPLIANCE	FCC, MET			
	WARRANTY	Séura warrants Outdoor Displays with respect to Séura's labor, structure, assembly, display including remote, and power supply for two (2) years.			
	REMOTE	Séura Water Resistant IR Remote Control			

* The screen is most optimally viewed at ambient temperatures of 32°F to 122°F. Installation in sunlight reduces the maximum permitted air temperature.

† IP Rating is an international standard that specifies the degree of protection against dust and water ingress. Séura Outdoor TVs are IP rated and designed to protect against rain, snow, ice, dust, and other outdoor elements.



1230 Ontario Road Green Bay, Wisconsin 54311
1-800-957-3872 contacts@seura.com
www.seura.com

Publish date: May 6, 2019. Information is subject to change without notice.

© 2018 Séura