

Installation assistance available at:

RFTECH

www.rockfordfosgate.com/rftech

YAMAHA® YXZ®
FRONT SPEAKER
ENCLOSURES

RFYXZ-FSEU

600 South Rockford Drive • Tempe, Arizona 85281 United States
Direct: (480) 967-3565 • Toll Free: (800) 669-9899

ROCKFORD FOSGATE . COM



Serial Number: _____ Date of Purchase: _____



Installation & Operation

Introduction

Dear Customer,

Congratulations on your purchase of the world's finest brand of audio products. At Rockford Fosgate we are fanatics about musical reproduction at its best, and we are pleased you chose our product. Through years of engineering expertise, hand craftsmanship and critical testing procedures, we have created a wide range of products that reproduce music with all the clarity and richness you deserve.

For maximum performance we recommend you have your new Rockford Fosgate product installed by an Authorized Rockford Fosgate Dealer, as we provide specialized training through Rockford Technical Training Institute (RTTI). Please read your warranty and retain your receipt and original carton for possible future use.

Great product and competent installations are only a piece of the puzzle when it comes to your system. Make sure that your installer is using 100% authentic installation accessories from Rockford Fosgate in your installation. Rockford Fosgate has everything from RCA cables and speaker wire to power wire and battery connectors. Insist on it! After all, your new system deserves nothing but the best.

To add the finishing touch to your new Rockford Fosgate image order your Rockford accessories, which include everything from T-shirts to hats.

Visit our web site for the latest information on all Rockford products;

www.rockfordfosgate.com

or, in the U.S. call 1-800-669-9899 or FAX 1-800-398-3985. For all other countries, call +001-480-967-3565 or FAX +001-480-966-3983.

Table of Contents

- 2 Introduction
- 3-7 Installation
- 8 Warranty

If, after reading your manual, you still have questions regarding this product, we recommend that you see your Rockford Fosgate dealer. If you need further assistance, you can call us direct at **1-800-669-9899**. Be sure to have your serial number, model number and date of purchase available when you call.

PRACTICE SAFE SOUND

Continuous exposure to sound pressure levels over 100dB may cause permanent hearing loss. High powered auto sound systems may produce sound pressure levels well over 130dB. Use common sense and practice safe sound.

Safety

This symbol with "WARNING" is intended to alert the user to the presence of important instructions. Failure to heed the instructions will result in severe injury or death.



This symbol with "CAUTION" is intended to alert the user to the presence of important instructions. Failure to heed the instructions can result in injury or unit damage.



- To prevent injury and damage to the unit, please read and follow the instructions in this manual. We want you to enjoy this system, not get a headache.
- If you feel unsure about installing this system yourself, have it installed by a qualified Rockford Fosgate technician.
- Before installation, disconnect the battery negative (-) terminal to prevent damage to the unit, fire and/or possible injury.

Contents

- (2) Front Speaker Enclosures
- (2) Wire Harnesses
- Mounting Hardware
- Plastic Wire Tie Wraps
- Foam Tape

Installation Tools

The following is a list of suggested tools needed for installation:

- Drill
- Drill Bits (1/8", 5/16" & 1/2")
- Small Flat Blade Screwdriver
- Large Ratchet
- 10mm Socket
- 10 mm Wrench
- 4mm Allen Wrench
- Wire Cutters
- Pencil or Marker
- Panel Tool

Installation Considerations

This section focuses on some considerations for installing your Yamaha YXZ front upper speaker enclosures. This manual will illustrate the installation process with a 2017 Yamaha YXZ1000R SS with a RFXYZ-K8 & RFXYZ-PMXDK wiring kit.

If you feel unsure about installing this system yourself, have it installed by a qualified technician.

WARNING

When drilling holes, make sure what is on the other side. Be sure that any electrical, fuel lines or any other important components are free and clear from the area.

CAUTION

Before installation, disconnect the battery negative (-) terminal to prevent damage to the unit, fire and/or possible injury.

CAUTION

Before beginning any installation, follow these simple rules:

- Be sure to carefully read and understand the instructions before attempting to install this wiring kit.
- Consult your UTV's service manual for model specific information. Models may differ from year to year depending on factory options and aftermarket accessories added.
- These enclosures are specifically designed to work with Rockford Fosgate's PM and RM series 6.5" speakers.
- With the addition of an amplifier or source unit, be sure that your current charging system is in proper working order.
- Visit **rockfordfosgate.com** for more comprehensive product information.
- Visit our **YouTube** channel for comprehensive installation videos.



Installation

Applicable Models:

2016 & Up YXZ1000R/YXZ1000R SS

These front speaker enclosures are designed to work with Rockford Fosgate's RFYXZ-K8 amplifier kit and/or RFYXZ-PMXDK dash kit.

NOTE: Some additional interior pieces were removed to make photography easier for documenting the installation process. The installation process is the same for both the passenger and driver's side of the vehicle.



Step 1 - Remove Hood

Using a 4mm allen wrench, loosen the screws holding the hood in place and remove the hood from the vehicle.




Step 2 - Remove Inner Fender Wells

Remove the inner fender wells using a 10mm socket. There are (7) bolts on passenger side and (4) on driver's side securing them to the vehicle.



(Step 2 cont'd)

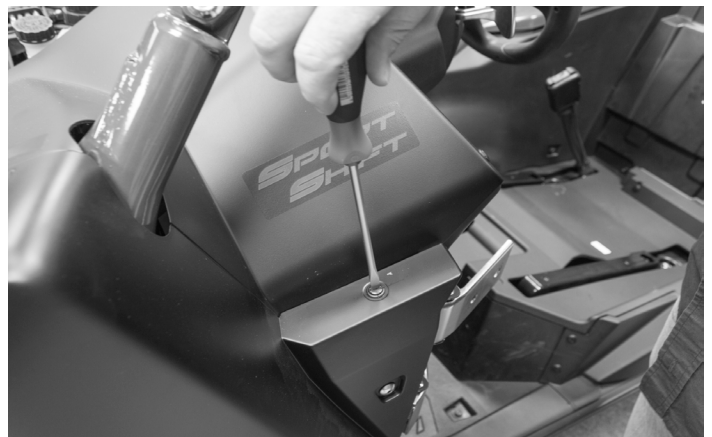

Then remove the plastic rivet found on top of the area on either side of the dash console.



Step 3 - Prepare Speaker Enclosures and Mounting Area

Temporarily install the speaker pod onto the fender by aligning the guide pin with the hole from the plastic rivet to mark the holes that will need to be drilled.

NOTE: Ensure the enclosure is fully seated in place before marking the mounting holes.



Using a marker, mark the location of the (4) holes on the bottom of the speaker pod for drilling.




Remove the pod and drill (4) holes in the firewall using a 5/16" and 1/2" drill bit.



Next, prep the speaker pods by drilling the blind holes in the pods. The pods come with the mounting hole locations already marked. Use a 1/8" bit to clean out the holes to prevent damaging the screws or enclosures.

NOTE: There are (8) speaker mounting holes already marked on the speaker pods and are designed to accommodate Rockford Prime M0/M1 and Punch M2 speakers. Insert your speaker for reference to see what holes will need to be drilled out. You will only need to drill out only (4) per enclosure.

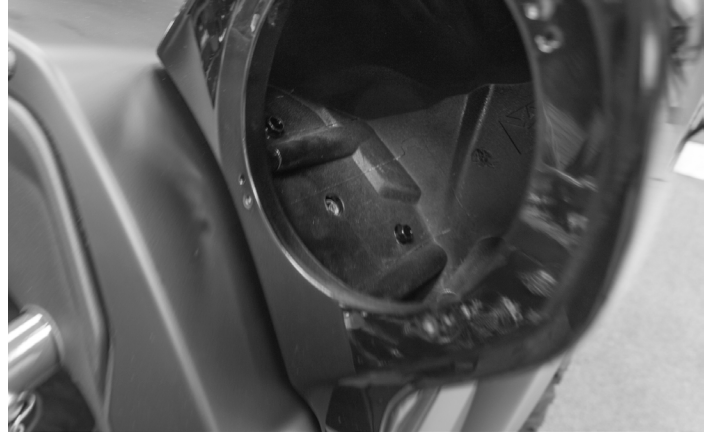

Step 4 - Mount Speaker Enclosures

Remount the pod onto the fender location.

Install using the supplied bolts through the bottom of the enclosure. The bolts will go through the drilled 5/16" holes.




Secure with the supplied washers and nuts.



Take the speaker wire harness and run from the RFXYZ-K8 or RFXYZ-PMXDK harness under the hood to the holes drilled in the fender.

Installation

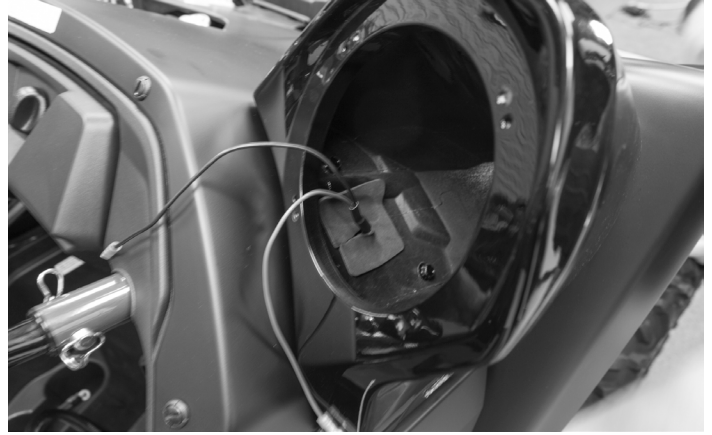


NOTE: Be sure leave adequate wire length to attach the speaker.



Feed the speaker wire harness through the 1/2" hole.



Attach the speaker wire harness connectors to the speaker terminals.

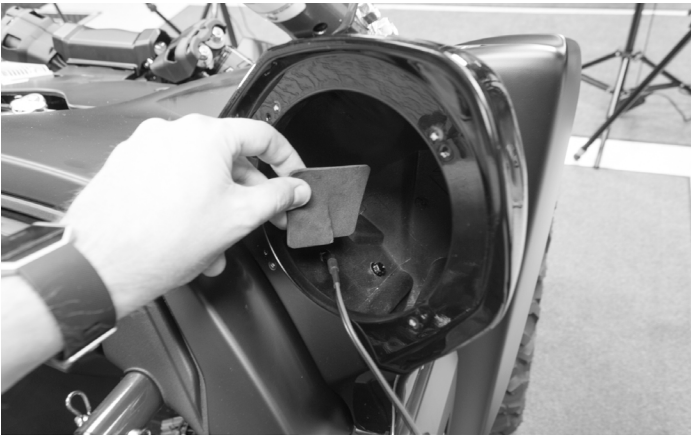

Apply the supplied foam sealing tape to the inside of the speaker enclosure to make sure you have a weather tight seal.



Load the speaker into the enclosure and secure using the hardware supplied with the speaker.

NOTE: After the speaker is secured repeat the installation process for the opposite speaker pod on the other side.



Once both speaker pods are installed and the harnesses are ran, locate the rear speaker output connections in the RFYZ-DK radio harness or the RFYZ-K8 harness and remove the watertight plugs.



Connect the speaker harnesses to the output plugs paying attention to the left and right speaker labels.

Once the connections are made, test the system to verify functionality.



After testing, secure the wire harnesses with plastic wire ties and reassemble the vehicle.

Warranty

Rockford Corporation offers a limited warranty on Rockford Fosgate products on the following terms:

Length of Warranty

POWER Amplifiers – 2 Years
BMW® Direct Fit Speakers – 2 Years
PUNCH® & PRIME® Amplifiers – 1 Year
Speakers, Signal Processors, Accessories and Capacitors – 1 Year
All marine, motorcycle, motorsport products – 2 Years
Any Factory Refurbished Product – 90 Days (receipt required)

What is Covered

This warranty applies only to Rockford Fosgate products sold to consumers by authorized Rockford Fosgate dealers in the United States of America. Products purchased by consumers from an Authorized Rockford Fosgate Dealer in another country are covered only by that country's Distributor and not by Rockford Corporation.

Who is Covered

This warranty covers only the original purchaser of Rockford product purchased from an authorized Rockford Fosgate dealer in the United States. In order to receive service, the purchaser must provide Rockford with a copy of the receipt stating the customer name, dealer name, product purchased and date of purchase.

Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at Rockford's discretion.

What is Not Covered

1. Damage caused by accident, abuse, improper installation, operations, theft, water (on non-Element Ready products).
2. Any cost or expense related to the removal or reinstallation of product.
3. Service performed by anyone other than Rockford or an authorized Rockford Fosgate service center.
4. Any product which has had the serial number defaced, altered, or removed.
5. Subsequent damage to other components.
6. Any product purchased outside the U.S.
7. Any product not purchased from an authorized Rockford Fosgate dealer. Refer to rockfordfosgate.com dealer locator for more detail.

Limit on Implied Warranties

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for Rockford Fosgate any other liability in connection with the sale of the product.

How to Obtain Service

Please call 1-800-669-9899 for Rockford Customer Service. You must obtain an RA# (Return Authorization number) to return any product to Rockford Fosgate. You are responsible for shipment of product to Rockford.

EU Warranty

This product meets the current EU warranty requirements, see your Authorized dealer for details.