



Contemporary 10" Pro-style for under cabinet applications.

Exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 11 Internal or External blower options offered separately.

Canopy design utilizes fully welded construction for seamless appearance.

Bright Halogen lighting floods the cooktop and surrounding area for clear visibility.

Mesh lined Hi-Flow™ baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

**Model Numbers:**

UP27M30SB

UP27M36SB

UP27M42SB

UP27M48SB



Variable speed control with last setting memory.



Halogen lamps brilliantly illuminate the cooktop.



Hi-Flow™ baffle filters utilize a V-mesh & baffle design to increase airflow, decrease sound levels and provide excellent ventilation efficiency.



Optional non-ducted recirculation kit for use with internal blower models.



**Hood Sizes**

**Widths** 30", 36", 42", 48"

**Depth** 22"

Must purchase blower separately.

**Finish**

Stocked Brushed Stainless Steel—Seamless

Special Order Not Available

**Features**

Lighting Type Halogen, GU10, MR16, 50-watt

Number of Lamps 2 on 30", 36" | 4 on 42", 48"

Lighting Levels Variable

Lighting Lamps Included Yes

Control Type Variable Speed Rotary with Last Setting Memory

Control Features Heat Sentry™

Remote Control Not Available

Filter Type Hi-Flow™ Baffle Filter

Non-ducted Capability Yes

**Hood Blower Options** (Must choose one blower sold separately)

Internal	iQ6	P3	P6	
Blower CFM	600	300	600	
Sones Low/High	0.3/7.5	0.3/3.5	2.0/9.5	
External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Some levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500
Some levels are typically half of comparable CFM internal blowers.				

**Accessories**

Non-Duct Kit ANKUP302RSB, ANKUP362RSB, ANKUP422SB, ANKUP482RSB

Non-Duct Filter AFCROUND2

Universal MUA Damper MD6TU, MD8TU, MD10TU

**Installation Requirements**

Amps @ 120V 7.7 Max


Electrical Connection Direct Wire

Duct Size: Internal Blower 8"

Duct Size: External Blower 10" (at hood)

Duct Direction Vertical

Backdraft Damper Included

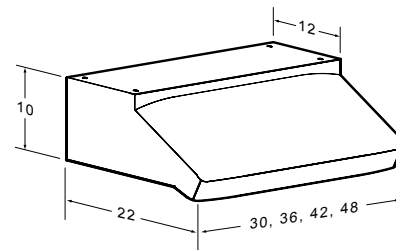

Installation height above the cooking surface: 24"-30"

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)

**ANKUP Non-Duct Kit**

