


# Gas Cooktop, 36"

Series 9 | professional

Stainless Steel | LPG

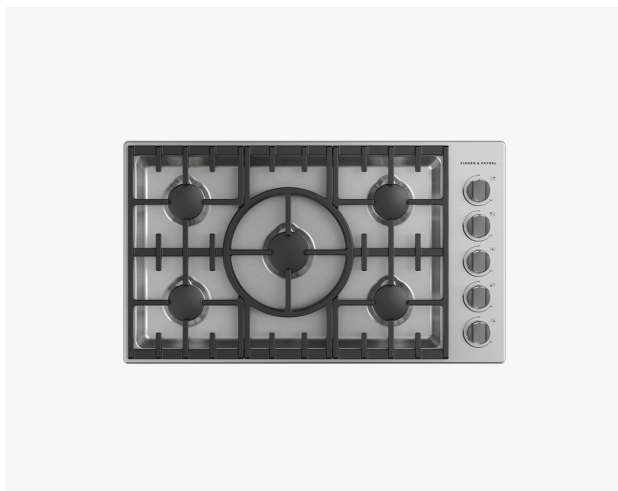

A powerful high-heat five burner with precision control and performance. Pair with any other appliance in our Professional range.

- Your burners can deliver anything from a high 20,000 BTU heat per burner for fast boiling, to a gentle flame for simmering
- Continuous surface grates designed for pots and pans to move safely across the cooktop
- Designed to match Professional style appliances
- Made from quality materials and real stainless steel

## DIMENSIONS

|        |         |
|--------|---------|
| Height | 5 1/2 " |
| Width  | 36 "    |
| Depth  | 21 "    |

## FEATURES & BENEFITS

### Cooktop power

Sealed Dual Flow Burners™ deliver cooktop power up to 20,000 BTU for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

## SPECIFICATIONS

### Burner ratings

|                    |        |
|--------------------|--------|
| Max burner power   | 20,000 |
| Power back left    | 15,000 |
| Power back right   | 15,000 |
| Power front centre | 20,000 |
| Power front left   | 15,000 |
| Power front right  | 15,000 |
| Total Power        | 80,000 |

### Controls

|                              |   |
|------------------------------|---|
| Titanium coated, illuminated | • |
|------------------------------|---|

### Gas requirements

|                               |                              |
|-------------------------------|------------------------------|
| Fitting and pipe              | 1/2 NPT, min. 3/8" flex line |
| Supply Pressure (natural gas) | 6" to 9" W.C                 |

### Performance

|                           |       |
|---------------------------|-------|
| Sealed Dual Flow Burners™ | 5     |
| Sealed cooking surface    | •     |
| Simmer on all burners     | 140°F |

### Power requirements

|                  |      |
|------------------|------|
| Amperage         | 15A  |
| Supply frequency | 60Hz |
| Supply voltage   | 120V |

### Product dimensions

|        |         |
|--------|---------|
| Depth  | 21 "    |
| Height | 5 1/2 " |
| Width  | 36 "    |

### Recommended back guards and ventilation

|                  |                        |
|------------------|------------------------|
| Downdraft        | HD36                   |
| Minimum CFM      | 600                    |
| Pro hood         | HCB36-12 N / HCB36-6 N |
| Traditional hood | ES36                   |

### Warranty

|                  |         |
|------------------|---------|
| Parts and labour | 2 years |
|------------------|---------|

|     |       |
|-----|-------|
| SKU | 82024 |
|-----|-------|

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

---

Other product downloads available at [fisherpaykel.com](http://fisherpaykel.com)



User Guide



Guide D'Utilisation



Service & Warranty Booklet



Installation Guide



Guide D'Installation



**A PEACE OF MIND SALE**

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W [www.fisherpaykel.com](http://www.fisherpaykel.com)