FEATURES

- Heavy-duty, stainless steel seamless construction with black glass front.
- Internal, in-line or remote blower required (sold separately).
- Telescopic chimney.
- Black glass touch control panel with display.
- Three-speed blower with boost to temporarily increase airflow.
- LED lighting with high and low settings.
- Delay-off feature to automatically turn unit off.
- Filter clean indicator.
- Dishwasher-safe filters.
- Transition with backdraft damper.



Model VW30B



BLOWER OPTIONS	
MODEL VW30B	CFM
Internal	300*, 600
In-line	600
Remote	600

*For make-up air restricted applications.

Cooktop hoods are recommended for use with Wolf induction, electric and gas cooktops and integrated modules. For Wolf ranges and rangetops, a pro ventilation hood is recommended.

ACCESSORIES

- Internal, in-line and remote blowers (refer to chart).
- Remote control.
- Chimney extension.
- 30" high stainless steel wall shield.
- Recirculating kit and filter for nonducted applications.
- Make-up air damper.

Accessories available through an authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



wolfappliance.com




wolfappliance.com

SPECIFICATIONS	
PRODUCT Dimensions Overall Height Weight	30"W x 2 ¹ /4"H x 19 ¹ /4"D 31 ³ /8" - 41 ¹ /2" 53 lb
DISCHARGE Vertical	6" Round
ELECTRICAL Supply Service	110/120 VAC, 60 Hz 15 amp circuit
INSTALLATION Bottom of Hood	to Countertop 24" – 36"

Specifications are subject to change without notice. Visit wolfappliance.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

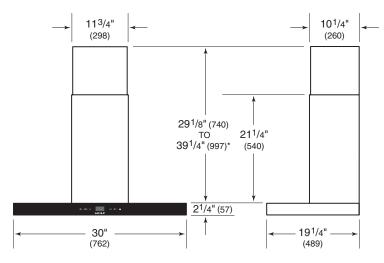

*49¹/8" (1248) to 59^{1} /4" (1505) with accessory flue extension.

ELECTRICAL LOCATION



 $^{24&}quot;\,(610)$ to $36"\,(914)$ bottom edge to countertop