

Diagrams (3


Unit Dimensions



- **A.** 79-1/2" (2020 mm)
- **B.** 29-3/8" (747 mm)
- **C.** 24-13/16" (630 mm)
- **D.** 52-3/8" (1330 mm)
- E. 31-1/8" (791 mm)

Ventilation Requirements





Do not restrict the air flow. The opening can either be directly over the appliance ①, above the cabinet and below the ceiling ② or through a vent installed in a soffit ③.

The cabinet height as specified at **80"** (2032 mm) will create a **1-5/16"** (33 mm) gap above the appliance providing optimal air flow over the top of the appliance for its efficient operation.


Be sure to consider the possibility of having to raise some of the leveling legs in order to level the appliance when installing. If you adjust the height of the appliance - it will effectively reduce air flow. Therefore leave yourself some room for adjustment.

IMPORTANT

The section between the freezer door and the floor must not be covered.

The refrigerator is designed to allow proper air flow when the appliance is installed up against the wall. A minimum space of 1 1/2" is required behind the cabinet when venting above an upper cabinet which is installed flush to the top of the appliance.

Cabinet Opening Dimensions

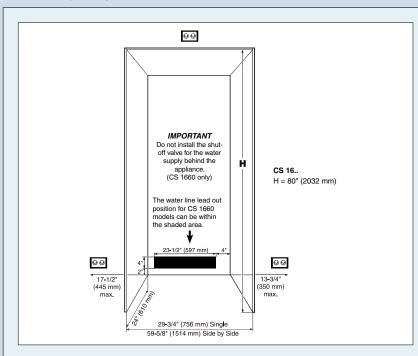

The appliance can be used freestanding or semi built-in. If semi built-in, consider the cabinet opening dimensions.

The power cord comes out of the appliance top. The location of the electrical outlet can be within a radius of 90 inch from the appliance top center.





The urban design of the **CS 1640B** is the perfect choice for apartment living. The CS 1640B includes smart interior design features like a beverage rack, foldable glass shelf, and a stainless back wall which prevents ice build-up and dripping. Liebherr's SmartSteel material on the door is scratch resistant and makes fingerprints virtually disappear. Liebherr's DuoCooling system for the refrigerator and the freezer provides superior performance and efficiency, as well as advanced food preservation. DuoCooling creates optimal conditions in both the refrigerator and freezer compartments, which lengthens the shelf life of food items for a healthier lifestyle. Advantageously, this model eliminates the need for a water hook up as it has a convenient 50oz internal water tank for the IceMaker. Simply fill the tank with filtered water to produce perfect half-moon crescent ice cubes.




Freestanding/Semi Built-in

Energy consumption in 365 days kWh Estimated Yearly Energy Cost in US \$ Capacity Total capacity cu.ft. (I) Refrigerator comp. cu.ft. (I) NoFrost Freezer comp. cu.ft. (I) Shipping weight lbs. (kg) Climate rating Sound rating dB(A) Ice cube output lbs. (kg) / 24h Ice cube stock lbs. (kg) Door hinges **Outside dimensions** in inches (cm) H/W/D **Cut out dimensions** in inches (cm) H /W/D **Energy supply** Voltage V/Hz

CS 1640B Comfort	ENERGY STAR	No Frost	Duo Cooling	Ice Maker	Soft Systen
496					
60*					
15.9 (452)					
11.6 (331)					
4.3 (121)					
266.8 (121)					
SN-T					
40**					
3.1 (1.4)					
4.4 (2.0)					
right, reversible					
70.04.08/00.04.0		(0.00 /7	E (0.0)		
79 9/16"/29 9/16	"/24 13/16"	(202/7	5/63)		
00"/00 0/4"/04" //	000 0/75 6/	C1)			
80"/29 3/4"/24" (2	203.2/73.6/	01)			

				22			
ENERGY STAR	No Duo Frost Cooling	lce Maker	Soft System	Smart Steel			
4 13/16" (2	02/75/63)						
3.2/75.6/61)						



115/60



German Engineering: Our superior products offer premium quality, cutting edge design and innovative features that fit your busy lifestyle. Exclusive components and materials, along with the latest production processes, ensure energy efficiency and performance for years to come.





there is no transfer of unwanted air, moisture or

food aroma between the two compartments.

4343434



SuperCool/SuperFrost: Simply quick chill and/or freeze fresh groceries to preserve optimum freshness and seal in flavors, textures as well as maintain essential vitamins and minerals.



SuperQuiet: Noise is kept to a minimum with virtually silent, speed controlled compressors and a low-noise cooling circuit; while also ensuring exact performance, energy efficiency and SuperQuiet operation.



SoftSystem: Unique to Liebherr is our patented SoftSystem, often used in high-end cabinetry, ensures that the door closes gently, even when fully loaded. Plus the door opening angle can be reduced to 90 degrees allowing for more design options within kitchen décor.



SmartSteel: Available on select freestanding/ semi built-in models, SmartSteel significantly reduces the visibility of fingerprints and is very easy to clean and scratch resistant. All that is required to maintain this beautiful exterior is the wipe of a clean dry or damp cloth.



Stainless back wall: The high-quality, stainless back wall is both eye-catching and highly functional. The stainless wall prevents foods from freezing up against the evaporator, ensuring that the back of the refrigerator is always drip and ice-free. Ventilation slits also help guarantee optimum temperature distribution.



Electronic Display: Our intuitive electronic touch control panel ensures all functions are easy and convenient to use as well as guarantees that the settings selected remain accurate and constant.

^{**} Noise output – according to EN 60704-3