

**Miele**

Freestanding  
24" Bottom Mount

KFN 13923 DE



## Freestanding 24" Bottom Mount

SPECIFICATIONS	
Overall Unit Dimensions	23 <sup>1</sup> / <sub>2</sub> " (597 mm) W x 79 <sup>1</sup> / <sub>2</sub> " (2020 mm) H x 24 <sup>13</sup> / <sub>16</sub> " (630 mm) D
Door Clearance	21 <sup>5</sup> / <sub>8</sub> " (549 mm)
Interior Volume	
Fresh Food Volume	9.43 cu-ft (267 L)
Freezer Volume	3.32 cu-ft (94 L)
Plumbing	
Water Supply Requirements	Connect to a cold water supply only. Must be connected to a shut-off valve. The water shut-off valve must be accessible after installation. The water pressure must be between 22 psi (1.5 bar) and may not exceed 87 psi (6 bar). If the pressure is higher than 87 psi (6 bar), a pressure reducing valve must be installed.
Water Connection Line	Unit comes with a male 3/4" BPT connection on back of unit. The connection parts included with the appliance permit the connection of various water lines (including 1/4" compression fitting). Water line is not included.
Electrical	
Electrical Requirements	110V / 120V, 60Hz, 15 Amps (single)
Power Cord	NEMA 5-15 plug, 7' 10 <sup>1</sup> / <sub>2</sub> " (2.4m)
Shipping	
Shipping Weight	203 lbs (92 kg)
Shipping Dimensions	24 <sup>9</sup> / <sub>16</sub> " W x 82 <sup>3</sup> / <sub>4</sub> " H x 27 <sup>7</sup> / <sub>8</sub> " D
Support	
Call Miele	(800) 999-1360
Miele Website	<a href="http://www.mieleusa.com">www.mieleusa.com</a>
20/20 Link	<a href="http://2020technologies.com">2020technologies.com</a>




KFN 13923 DE - Right Hinged  
(In Field Convertible)  
Item 38139230USA

## Freestanding 24" Bottom Mount

### APPLIANCE DIMENSIONS

Isometric View

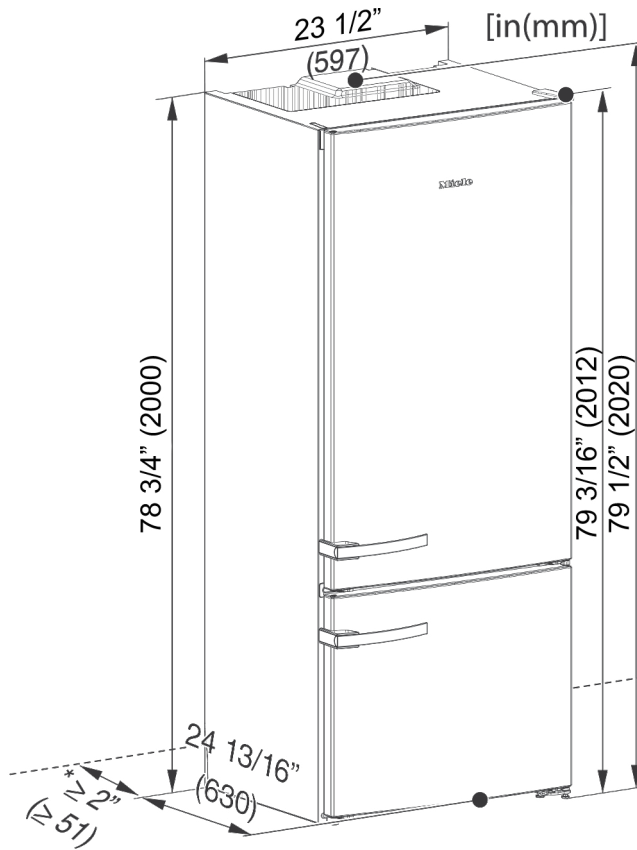

\* When the gap between the back of the appliance and the wall is less than 2" (51 mm), the energy consumption will increase. Please note that a spacer will be required if anti-tip devices are installed.

### Top View

(Door pinned at 90° and 115° opening)

