


KM 6320

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

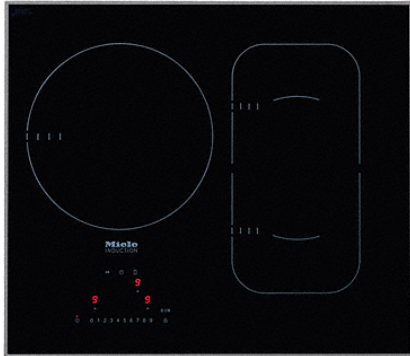

- Intuitive selection via numerical linear keybank - Direct control
- Attractive design - 24 3/4 (626)Inch wide with stainless steel frame
- Versatile and fast - 3 cooking zones incl. 1 PowerFlex area
- Communication with the hood - automatic function Con@ctivity
- Broad performance spectrum - keeping warm function and TwinBooster

EAN: 4002515472903 / material number: 09775880

Type of heating	
Fuel type	Induction
Construction type	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface color	Black
Print design	LightPrint
All-round stainless steel frame	•
Proud-mounted installation	•
Ring features	
No. of rings	3
PowerFlex cooking zone	
Number	2
Size in inches (mm)	Ø 150 – 230
Max. rating in W	2200
Max. booster rating in W	3100
Max. TwinBooster rating in W	3850
Ring	
Position	left centre
Type	Variable cooking zone
Size in inches (mm)	Ø 180-280
Max. rating in W	2500
Max. booster rating in W	3100
Position	right
Type	PowerFlex bridge
Size in inches (mm)	230x390
Max. rating in W	3550
Max. booster rating in W	5000
Max. TwinBooster rating in W	7700
Control panel	
Operation via touchpad sensors	Simple direct selection
Display color	Red
Pan/Pan-size sensors	•
Stop & Go function	•
Minute minder	•
Automatic switch-off for all rings	•
AutoBoost	•
Keep-warm function	•
Individual setting options (e.g. acoustic signal tones)	•
Cleaning convenience	
Easy to clean ceramic surface	•
Safety	
Safety cut-out	•
Lock function	•
System lock	•
Integrated cooling blower	•
Overheating protection	•


More information at www.MieleUSA.com

For further information please see next page...

KM 6320

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.


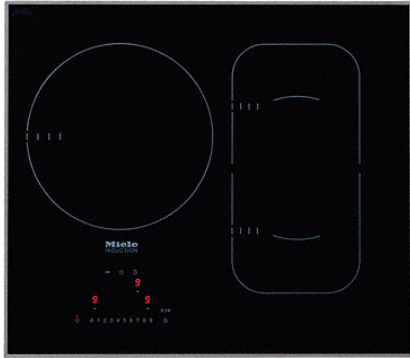


Technical data	
Dimensions in in. (width)	24 3/4 (626)
Dimensions (height) in in.(mm)	5 1/8 (128)
Built-in height with mains connection box in in.(mm)	4 7/8 (121)
Dimensions (depth) in in.(mm)	21 1/2 (544)
Cutout dimensions in in. (width) with proud-mounted installation	22 3/8 (567)
Cutout dimensions in in. (depth) with proud-mounted installation	20 1/2 (518)
Weight in lbs. (kg)	39 (18)
Total connected load in kW	7.7
Power cord length in m	3 (1.2)
Standard accessories	
Connection wire	•

KM 6320

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

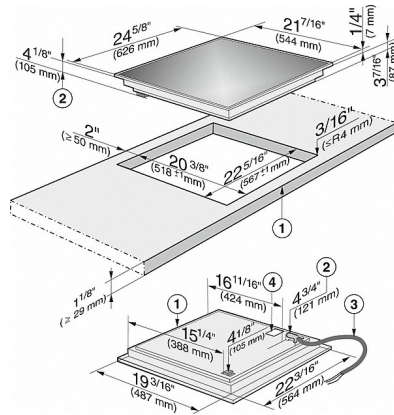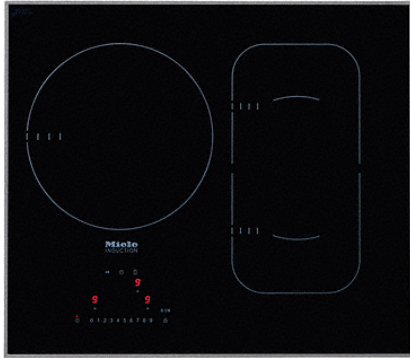

KM 6320 (Installation drawing)

- 1) Front
- 2) Casing depth
- 3) Flexible metal Extension hose L = 47 1/4" (1200 mm)
- 4) Data plate