


KM 6375

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

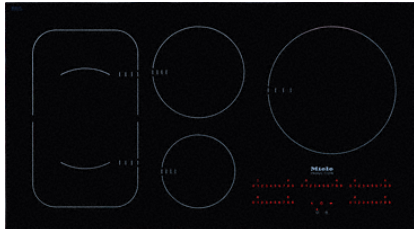

- Quick selection using numerical linear keybanks - Direct control plus
- Modern design - 35 7/8 (911)Inch wide for flush-mounted installation
- Versatile and fast - 5 cooking zones incl. 1 PowerFlex area
- Communication with the hood - automatic function Con@ctivity
- Broad performance spectrum - keeping warm function and TwinBooster

EAN: 4002515472781 / material number: 09775920

Type of heating	
Fuel type	Induction
Construction type	
Independent of oven	•
Design	
Elegant glass ceramic surface	•
Ceramic surface color	Black
Print design	LightPrint
Flush-mounted installation	•
Ring features	
No. of rings	5
PowerFlex cooking zone	
Number	2
Size in inches (mm)	Ø 150 – 230
Max. rating in W	2200
Max. booster rating in W	3100
Max. TwinBooster rating in W	3850
Ring	
Position	Left
Type	PowerFlex bridge
Size in inches (mm)	230x390
Max. rating in W	3550
Max. booster rating in W	5000
Max. TwinBooster rating in W	7700
Position	rear center
Type	Variable cooking zone
Size in inches (mm)	Ø 140-200
Max. booster rating in W	2600
Position	rear right
Type	Variable cooking zone
Size in inches (mm)	180-280
Max. rating in W	2500
Max. booster rating in W	3100
Position	front center
Type	Variable cooking zone
Size in inches (mm)	Ø 100-160
Max. rating in W	1450
Max. booster rating in W	1900
Control panel	
Operation via touchpad sensors	Multiple direct dial
Display color	Red
Pan/Pan-size sensors	•
Stop & Go function	•
Minute minder	•
Automatic switch-off for all rings	•
AutoBoost	•
Keep-warm function	•
Cleaning convenience	
Easy to clean ceramic surface	•


More information at www.MieleUSA.com

For further information please see next page...

KM 6375

Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.


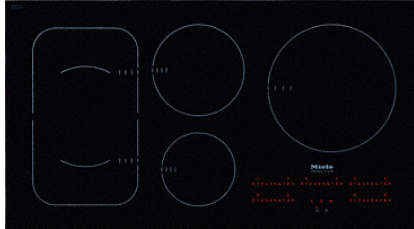


Safety	
Safety cut-out	•
Lock function	•
System lock	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in in. (width)	35 7/8 (911)
Dimensions (height) in in.(mm)	4 7/8 (121)
Built-in height with mains connection box in in.(mm)	5 1/8 (128)
Dimensions (depth) in in.(mm)	20 1/4 (512)
Internal cutout dimensions in in. (width) with flush installation	889
Internal cutout dimensions in in. (depth) with flush installation	490
External cutout dimensions in in. (width) with flush installation	915
External cutout dimensions in in. (depth) with flush installation	516
Weight in lbs. (kg)	59 (27)
Total connected load in kW	11.5
Power cord length in m	3 (1.2)
Standard accessories	
Connection wire	•

KM 6375


Induction Cooktop

with PowerFlex cooking area for maximum versatility and performance.

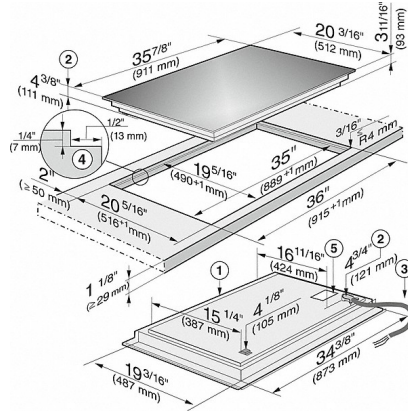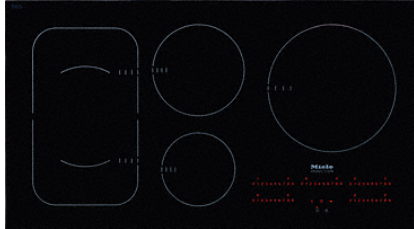


KM 6375 (Installation drawing)

- 1) Front
- 2) Casing depth
- 3) Flexible metal Extension hose L = 47 1/4" (1200 mm)
- 4) Stepped cut-out
- 5) Data plate

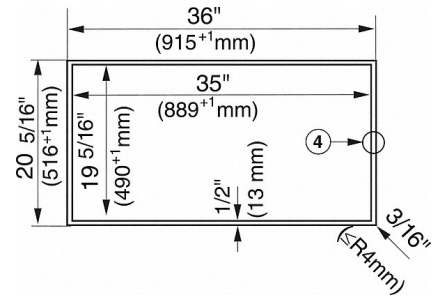


KM 6375 (Installation drawing)

- 4) Wooden frame 1/2" / 13 mm (not supplied with appliance)

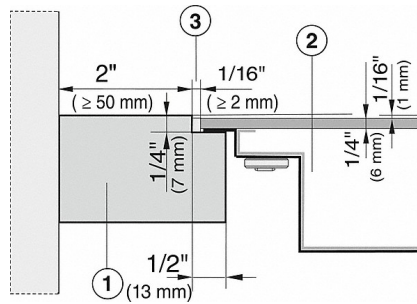

KM 6375 (Installation drawing)

- 1) Worktop
- 2) Hob
- 3) Width of gap

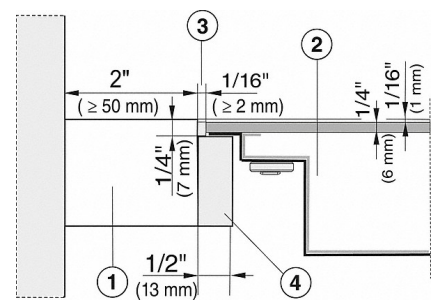

KM 6375 (Installation drawing)

- 1) Worktop
- 2) Cooktop
- 3) Gap
- 4) Wooden frame 1/2" / 13 mm (supplied loose)