

## DA 6596 W Puristic Canto AM

Wall ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design - 35 3/8 (898)Inch wide stainless steel ventilation hood
- Unique convenience - Con@ctivity 2.0
- Efficient and beautiful - Multi-zone edge extraction
- Variable: edge vented panels made of glass or stainless steel

EAN: 4002515523971 / material number: 09762220

<b>Construction type</b>	
Wall ventilation hood	•
<b>Design</b>	
Color	Stainless steel
RAL color possible as special order	•
Customization possible on request	•
Multi-zone edge extraction	•
<b>Operating modes</b>	
Recirculated mode	Convertible
OdorFree charcoal filter (order separately)	DKF12-900
Decor elements in glass (order separately)	DRP 6590W
<b>Control panel</b>	
Electronic controls	•
Light-touch controls	•
Power levels (number excl. Intensive)	3
Intensive setting	•
Programmable 'Intensive' switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Acoustic package	•
<b>Cleaning convenience</b>	
Easy-to-clean CleanCover hood liner	•
<b>Networking of domestic appliances</b>	
Automatic function Con@ctivity 2.0 (Zigbee)	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters	3
<b>Lighting</b>	
LED ClearView lighting	•
Light intensity in Lx	460
Color temperature in K	3,500
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Air throughput with max. duct diameter in vented mode (not for external version)</b>	
Air throughput	Values upon request
<b>Safety</b>	
Safety shut-off	•

## DA 6596 W Puristic Canto AM


Wall ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.



<b>Technical data</b>	
Overall hood height for vented and external in in.(mm)	27 3/8 (693)
Overall hood height for recirculation in in.(mm)	32 3/8 (820)
Canopy width in in.(mm)	35 3/8 (898)
Height of hood canopy in in.(mm)	2 7/8 (70)
Depth of hood canopy in in.(mm)	19 3/4 (500)
Minimum distance above electric cooktops in in.(mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	56 (25.0)
Length of electrical wire in ft (m)	4 (1.5)
Standard plug fitted	•
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Number of phases	1
<b>Installation notes</b>	
Vent connection at top	•
Vent connection at top and rear	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Telescopic wall bracket	•
<b>Standard accessories</b>	
Non-return flap	•
Reducer from 150 to 125 mm Ø	•
Wireless stick Con@ctivity 2.0 for KM	XKS 3000 Z

## DA 6596 W Puristic Canto AM

Wall ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.

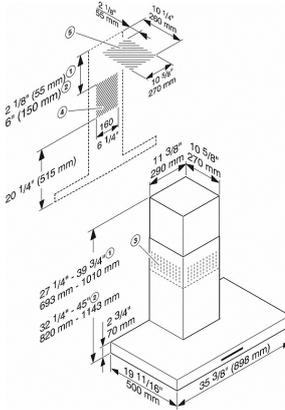

DA 6596 W (Installation drawing) - USA

- 1) Extraction
- 2) Recirculation
- 3) Ventilation grille at top for recirculation
- 4+5) Installation cut-out (5 not required for recirculation)