




Designer Aesthetics  
Audiophile Performance  
Installation Ease

## PERFORMANCE LOUDSPEAKER SPECIFICATIONS SHEET

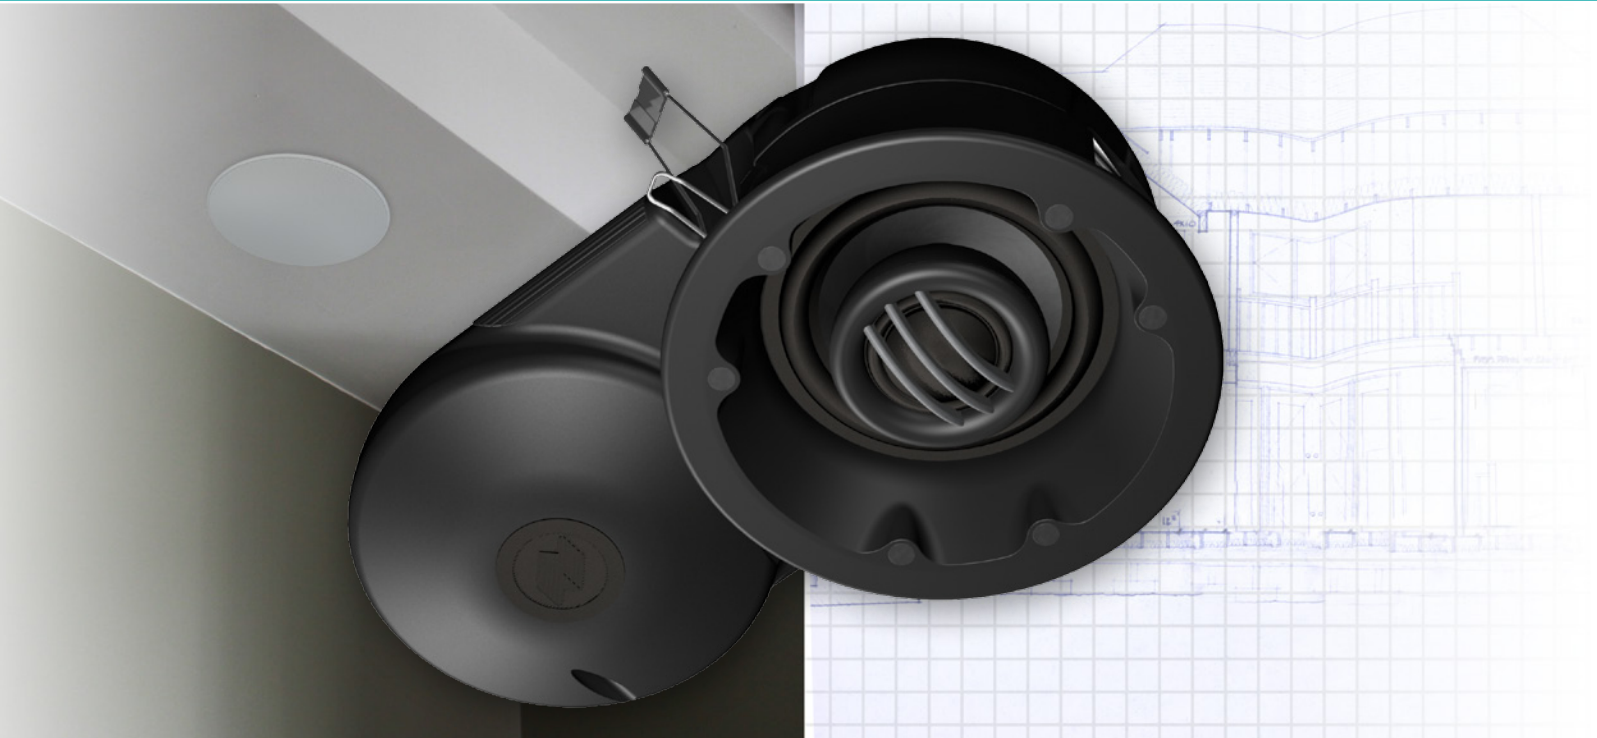

# CM4PR

## 4" 2-WAY CEILING-MOUNT PERFORMANCE LOUDSPEAKER



This compact ceiling mount loudspeaker features a rear wave control enclosure that inhibits sound transfer to adjacent rooms. It is ideal for locations with limited space and offers the ultimate in flexibility for installation locations.

### FEATURES AND BENEFITS

- **Designer Aesthetics** Magnetically attached MicroThin™ speaker grilles ensure a clean, virtually invisible appearance that blends with the room's aesthetics. Optional square grilles provide added design flexibility.
- **Superior Sound Quality** Precision tuned and voiced fixed woofer ceiling-mount loudspeakers provide graduated performance for all types of applications. Whether you are listening to background talk radio or a complete orchestra, Niles CM series delivers optimal performance and reliability.
- **Installation Ease** Tri-mount clips makes installation a snap, when installing in existing walls and surfaces. The unique shape of the rear wave enclosure fits easily through the mounting hole and has a depth of only 3 5/16" beyond standard 5/8" drywall.
- **Install With Confidence** The best-built loudspeakers deserve the best protection—the Niles Lifetime Limited Warranty.

## 2-WAY CEILING-MOUNT LOUDSPEAKERS

### CM4PR

#### 3.5" 2-Way Ceiling-Mount Performance Loudspeaker

For smaller spaces or wherever preventing sound bleed-through to other spaces is critical



Packaged Individually with Round MicroThin™ Grille

Stock Number

FG01666

### FEATURES

- Custom Rear Wave Enclosure enhances acoustic performance while limiting sound from bleeding through to adjacent spaces
- Mineral-Filled Polypropylene cone is extremely rigid to reduce breakup, lower distortion and provide enhanced bass response
- Butyl rubber surround damps resonance and provides exceptional durability
- 1" fluid-cooled Teteron® dome tweeter offers ultra-wide dispersion and silky-smooth high-frequency response
- Easy to Use Tri-mount clips provide for quick installation
- Magnetically attached, rust-resistant grille covers install quickly and provide a low profile look
- Weather resistant construction reduces installation limitations and provides unique solutions in moist environments or outdoors under eaves



### SPECIFICATIONS

- Frequency Response: 70Hz to 21kHz +/-3dB
- Impedance: 8 ohm nominal; 6 ohm minimum
- Recommended Amplifier Power: 25 to 100 Watts
- Hole Cutout: 4-5/8" (11.75 cm)
- Depth behind ceiling (5/8" drywall): 3 5/16" (8.4 cm)
- Shipping Weight: 2.7 lbs (1.2 kg)




**WARRANTY:** Lifetime Limited

#### RELATED PRODUCTS

	<p><b>SG4C</b> 4" Square Loudspeaker Grille Stock Number: FG01674</p>
	<p><b>NCB4C</b> 4" New Construction Bracket Stock Number: FG01673</p>



BLENDING HIGH FIDELITY AND ARCHITECTURE®

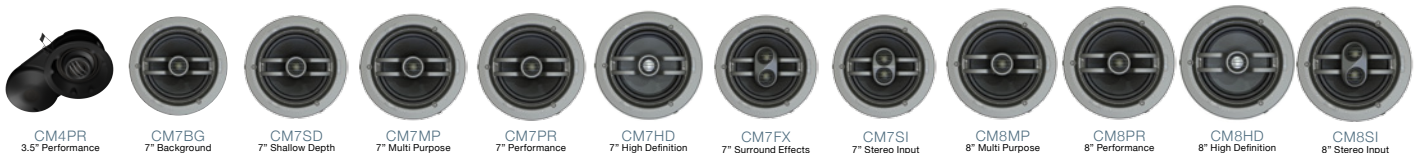

1-800-BUY-HIFI – [www.nilesaudio.com](http://www.nilesaudio.com)

©2011 The AVC Group, LLC. All Rights Reserved. Niles, the Niles logo and Blending High Fidelity and Architecture are registered trademarks of The AVC Group, LLC. MicroThin is a trademark of The AVC Group, LLC. All other trademarks are the property of their respective owners. We reserve the right to change features, descriptions, and/or specifications at any time without notice. CS0329A