CTD90DM2NS5



DISTINCT BY DESIGN™





This model requires a one-time WiFi connection to download oven features and functionality enabled by software. Follow instructions on your LCD screen on how to connect.

FEATURES & BENEFITS

Built-In WiFi, Powered by SmartHQ App[•] - Manage all aspects of your kitchen with the help of the SmartHQ[™] App or your voice assistant.

Personalized Features + Upgrades* - Usher in the latest features by downloading cooking upgrades right to your oven, putting Air Fry and more in your repertoire.

Create an easy-to-clean, contemporary look for your kitchen with the striking reflective glass finish.

Simply **use your voice** to open the wall oven, so you can keep both hands on heavy dishes.

Monitor your food from your smart device thanks to a heat-resistant **in-oven camera**^{*}, which syncs to the SmartHQ app.

Simplify the cooking process with **precision cooking modes** that automatically track progress, and make time and temperature adjustments.

Integrated **hot air frying** technology gives you crispy results in your oven without using oil.

Make homemade chips, spices and dehydrated fruits more easily than ever with a **moisture-removing setting** in your oven.

Eliminate the need for preheating and save time with a variety of **precision cooking modes**.

This oven features **True European Convection**, an advanced convection system that uses a third heating element and reversing fan for the highest level of heat and air circulation.

A precision **temperature probe** connects to the oven to ensure your food is properly cooked.

This oven will fit your existing cut-out, or GE Appliances will help pay for modifications up to \$300.

FEATURES		
Configuration	Double Oven	
Cooking System	True European Convection with Direct Air (Both Ovens)	
Oven Cleaning Type	Self-Clean with Steam Clean Option	
Cleaning Time	Variable with Delay Clean Option	
Oven Cooking Modes	Convection Bake; Convection Bake Multi-Rack; Convection Broil Hi/Lo; Convection Roast; Hot-Air Frying; Precision Cooking Modes; Thermal Bake; Thermal Broil Hi/Lo	
Self-Clean Oven Door Lock	Automatic	
Control Type	7" Full-Color Touch LCD Screen	
Oven Features	10-Pass Bake Element; 10-Pass Dual Broil Element; Closed Door Broiling	
Oven Rack Features	2 Self-Clean Roller Racks (Both Ovens); 6 Embossed Rack Positions (Both Ovens)	
Oven Control Features	12-Hour Shut-Off Capability; Audible Preheat Signal; Auto Recipe Conversion; Certified Sabbath Mode; Control Lock Capability; Cook Time; C ^o or F ^o Programmable; Dehydration; Delay Time; Electronic Clock & Kitchen Timer; Mis-Wire Detection; Oven Camera; Proof Mode; Remote Enabled; Scan-to- cook; Temperature Probe; Warm Mode	
WiFi Connect	Built-In	
Connected Capabilities	Amazon Alexa; The Google Assistant; IFTTT; Nest; Drop; Innit	
Cooking Technology	Convection	
Oven Interior	2 Halogen Interior Oven Lights (Both Ovens); Black Gloss Finish; Hidden Bake	

CAPACITY

Capacity (Cu. Ft.)	5.0 Upper / 5.0 Lower
Total Capacity (cubic feet)	10.0 cu ft

POWER / RATINGS

Amp Rating at 208V	40
Amp Rating at 240V	40
Bake Wattage	2,850W
Broiler Wattage	4,300W
Convection Wattage	2,400W
KW Rating at 208V	6.8
KW Rating at 240V	9

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	278 lb
Net Weight	260 lb
Overall Height	53 in
Overall Width	29-3/4 in
Overall Depth	24-3/4 in
Cabinet Width	30 in
Cutout Dimensions (w x h x d) (in.)	28-1/2 x 51-13/16 x 23-1/2
Oven Interior Dimensions (lower)	25 x 17-3/8 x 20-1/4
Oven Interior Dimensions (upper)	25 x 17-3/8 x 20-1/4

APPEARANCE

Color Appearance	Platinum Glass
Handle	Push-to-Open, Soft Open Hinges
Installation	Above Warming Drawer; Side-by-Side; Flush Inset

CTD90DM2NS5



WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details


DIMENSIONS AND INSTALLATION INFORMATION

Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200° F (94°C).

If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with product for current dimensional data.

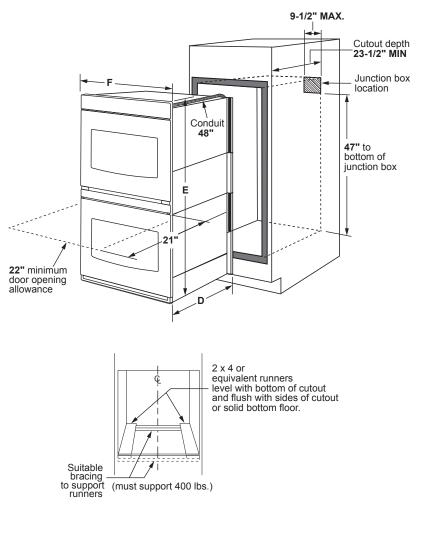

	28-5/8" MAX.	
	<u> </u> ↓	
	A A	
₿→	C	Cutout height 50-1/4" MIN. without pedestal 51-13/16" MIN. 51-15/16" MAX. with pedestal
	∢ 30'' →	Recommended minimum cutout location from the floor 12"

Cutout width 28-1/2" MIN.

Cabinet	30"
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	3/4"
C - Overlap of oven at bottom of cutout	1-1/4"
Oven	
D - Install depth	24-3/4"
E - Overall height with trim	53"
F - Overall width	29-3/4"

CTD90DM2NS5

DIMENSIONS AND INSTALLATION INFORMATION

30" Double electric wall ovens are approved for installation above 27" and 30" warming drawers.


WHEN TO USE THE PEDESTAL RAILS: When replacing an older GE Appliances 30" double wall oven with a new GE Appliances model. Cutout Height =51-13/16" to 51-15/16". This is our traditional cutout height.

WHEN NOT TO USE THE PEDESTAL RAILS: When replacing a 30" double wall oven from another manufacturer (ie; Whirlpool) with a new GE Appliances model. Cutout height = 50-1/4". You will need to verify that the existing cutout matches the 50-1/4" dimension.

If the new GE Appliances 30" double wall oven is being installed into new construction (ie; not a replacement), then the recommended installation is to use the pedestal rails.

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

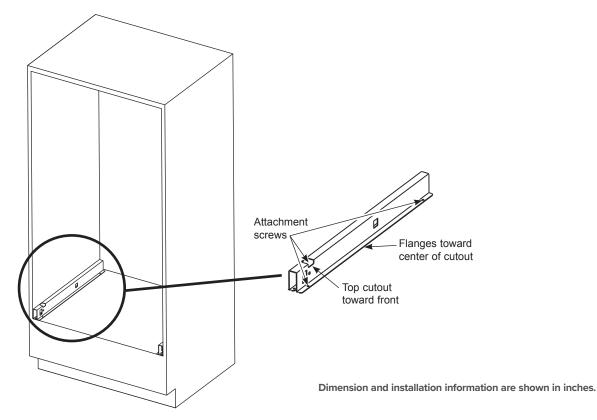





CTD90DM2NS5

FLUSH INSET DIMENSIONS AND INSTALLATION INFORMATION

NOTES:

A Junction Box location (may also be located in an adjacent cabinet.


B Platform must be able to support 400 lbs (181 kg).

C Cabinet surfaces must be an appearance finished surface for flush installation.

D Cleats may be visible and should be finished to match cabinetry.

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

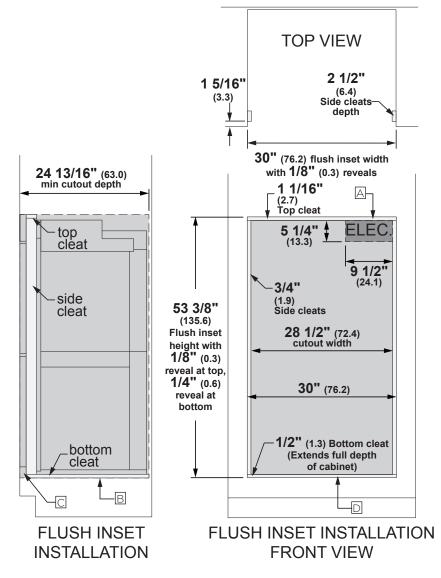

Allow 1/8" (0.3) clearances from side edges of oven door.

Dimension and installation information are shown in inches.