

# PT7800EK

## GE Profile™ 30" Built-In Combination Convection Microwave/Convection Wall Oven

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

**NOTE:** Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.


#### INSTALLATION INFORMATION:

Before installing, consult installation instructions packed with product for current dimensional data.

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Note: These ovens are not approved for stackable or side-by-side installations.

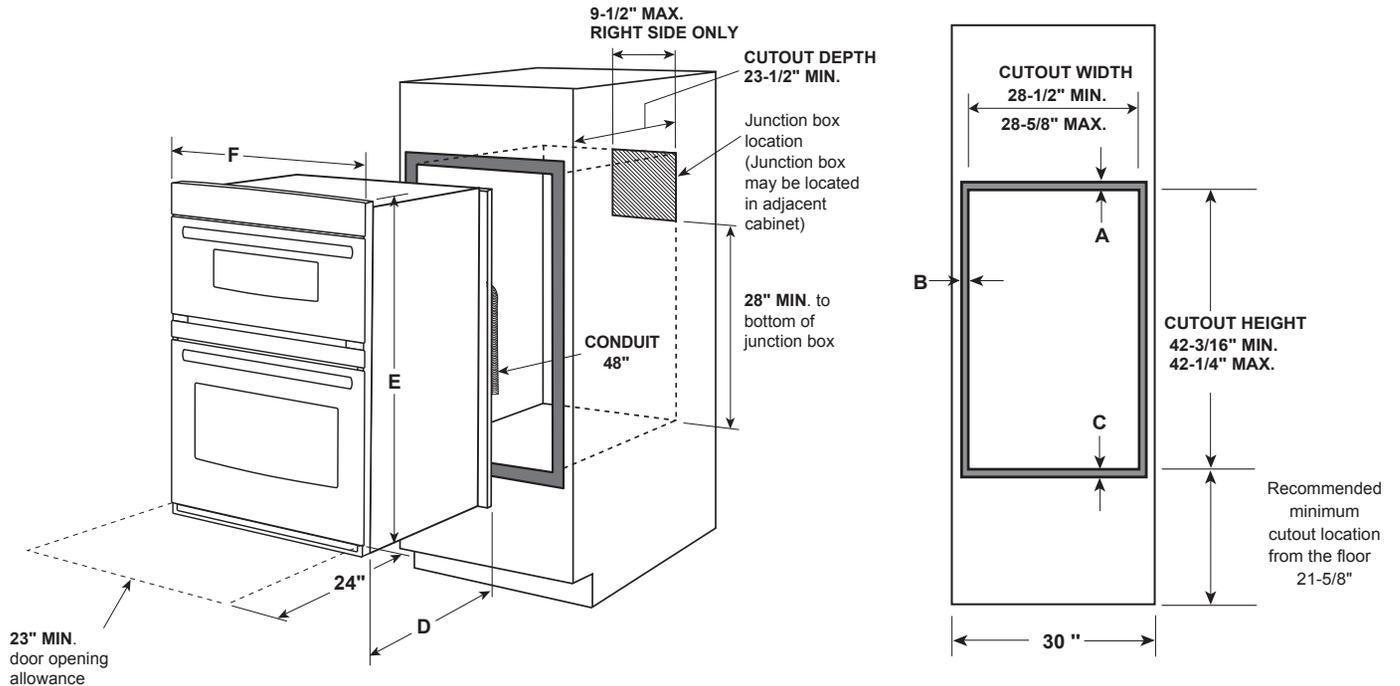

| KW RATING    |          |
|--------------|----------|
| 240V         | 7.2      |
| 208V         | 5.4      |
| BREAKER SIZE |          |
| 240V         | 30 Amps† |
| 208V         | 30 Amps† |

†NOTE: Check local codes for required breaker size.

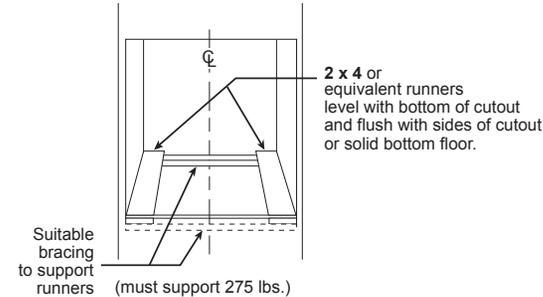

**ATTENTION INSTALLER:** All electric wall ovens must be hard-wired (direct-wired) into an approved junction box. A plug and receptacle is NOT permitted on these products.

**NOTE:** If the cabinet does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. For single ovens, the runners and braces must support 200 lbs (91 kg). For double ovens, the runners and braces must support 375 lbs. (170 kg).

**NOTE:** If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.

**NOTE:** If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.

| PK7800   |         |
|--|---------|
| <b>CABINET</b>   | 30"     |
| <b>A</b> —Overlap of oven at top of cutout             | 1"      |
| <b>B</b> —Overlap of oven over side of edges of cutout | 3/4"    |
| <b>C</b> —Overlap of oven at bottom of cutout          | 1"      |
| <b>OVEN</b>  |         |
| <b>D</b> —Install depth                                | 23-1/2" |
| <b>E</b> —Overall height with trim                     | 42-3/8" |
| <b>F</b> —Overall width                                | 29-3/4" |



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 1/22

# PT7800EK

## *GE Profile™ 30" Built-In Combination Convection Microwave/Convection Wall Oven*

### **FEATURES AND BENEFITS**

Convection microwave (upper oven)

True European Convection (lower oven)

Never-scrub, heavy-duty roller racks (lower oven)

Self-clean with Steam Clean option (lower oven)

Glass touch controls

Halogen interior oven lighting (lower oven)

10-pass bake element (lower oven)


8-pass broil element (lower oven)

1.7 cu. ft. microwave capacity

16" turntable (upper oven)

Fit Guarantee

Model PT7800EKES – Slate

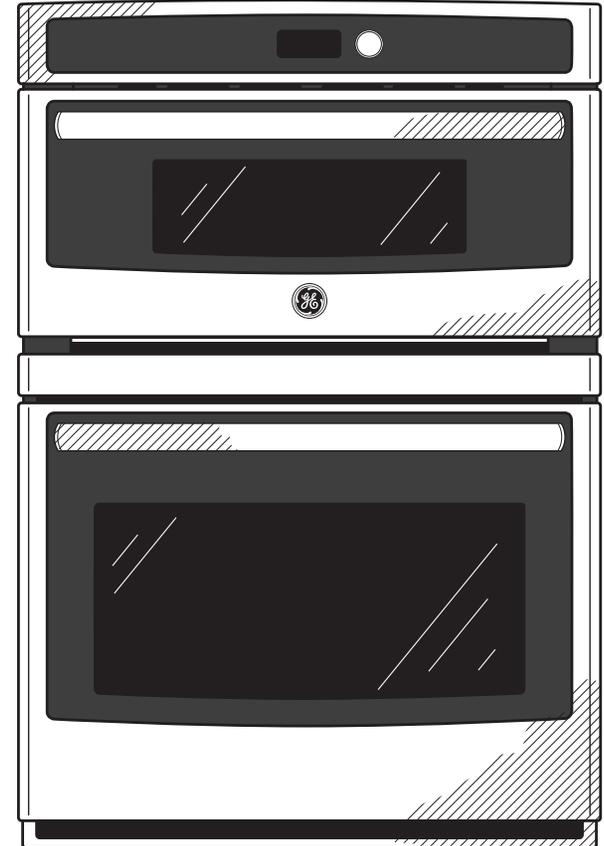

### **GUARANTEED FIT**

Replacing a similar wall oven from GE or another brand? GE wall ovens are guaranteed for an exact fit to make replacement easy

Visit [geappliances.com](http://geappliances.com) for more info



*For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.*