



SÉURA OUTDOOR TVS

## Full Sun Series<sup>™</sup>

For sunny locations, Séura Full Sun Series™ Outdoor TVs provide industry-leading image quality and 2000-nit brightness for a remarkable picture in any lighting condition, including full-sun viewing.









#### **Brightest In Class**

At 2,000-nit brightness that is colorcalibrated, Séura's Full Sun TVs are more than 6x brighter than typical indoor TVs and over 30% brighter than the closest competitor.



### Extreme Temperature Protection™

Séura's proprietary active heating and cooling system provides the necessary temperature control needed to protect the TV's components in temperatures from -40°F to 140°F.



#### Weatherproof

IP55 rated and fully sealed to keep out rain, snow, ice and dust, Séura outdoor TVs are safe for year-round use.



#### Outdoor Optics™

Séura's proprietary picture modes provide the ideal screen settings for the outdoor lighting environment you're in. Choose from five outdoor modes from full sun to nighttime viewing.



#### Lifelike Shades and Hues

Equipped with High Dynamic Range, Séura outdoor TVs provide sharp contrast between bright and dark colors for the best outdoor picture.



#### **Stunning Definition**

4K UHD picture clarity — four times the resolution of regular HD — has amazingly sharp details that immerse you in the moment.



#### UV Protected and Anti-Glare Screen

UV and isotropic blackout protection mean your picture will never go dark from exposure to sunlight. Enjoy a clear image with no reflections for the ideal picture viewing.



#### 2-Year Warranty

2-year warranty provides peaceof-mind for reliable and safe entertainment in any environment.





# Full Sun Series<sup>™</sup>





	OPERATING TEMP. RANGE (MAX)	-40 to 140° F*	
	OPERATING TEMP. RANGE (IDEAL)	32 to 122° F	
GENERAL	NON-OPERATING TEMP. RANGE	-40 to 140° F*	
Ä	OPERATING HUMIDITY RANGE	10-90% RH Non-condensing	
명	WATERPROOF RATING	IP55	
	ISOTROPIC BLACKOUT PREVENTION	High TNI panels help prevent screen blackout	
	ACTIVE HEATING/COOLING	Extreme Temperature Protection™	
	DISPLAY TYPE	LED Backlit LCD	
	DISPLAY RESOLUTION	4K UHD 3840 x 2160	
	DISPLAY BRIGHTNESS	2000 nits	
	DISPLAY COATING	Anti-Glare	
	ASPECT RATIO	16:9	
	CONTRAST RATIO	5000:1	
	REFRESH RATE	60Hz	
VIDEO	FRAME RATE	30 fps+	
₹	VIEWING ANGLE	178° Horiz/Vert	
	RESPONSE TIME	8ms	
	OUTDOOR OPTICS™	Five outdoor picture modes from full sun to nighttime viewing	
	COLOR GAMUT WIDTH	HDR-10 Rec 709 Compliant	
	COLOR MANAGEMENT SYSTEM	Yes	
	TUNER	ATV (NTSC) / DTV (ATSC)	
	DC Output	DC 5V 0.5A	
	HDMI	HDMI Version 2.1 HDCP Version 2.2 HDMI1, HDMI2 (ARC), HDMI3	
	COMPONENT YPBPR	1	
-	LAN PORT (LOCAL AREA NETWORK)	1 (IP Control)	
ē	RS-232C	1 (3.5mm)	
RAT	INTEGRATION	IP, RS-232C and IR	
NTEGRATION	USB	DC 5V, 0.5A, Capable of Photos & Updates	
Ξ	IR INPUT	1	
	IR OUTPUT	1	
	SERVICE PORT	1 (USB Type)	
	AC OUT	120V, 60Hz, 2A	
	ANALOG AUDIO INPUT	RCA x 1	
	ANALOG AUDIO	Stereo 3.5mm Variable	
0	BLUETOOTH® AUDIO BROADCASTING	Bluetooth® 4.2, 50 ft Clear Span	
AUDIO	DIGITAL AUDIO OUT	1 x Optical, 1 x Coax	
AL	DOLBY DIGITAL	Dolby Digital	
	INTERNAL SPEAKERS	N/A	
	SOUNDBAR	Sold Separately	

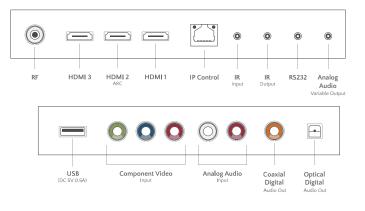

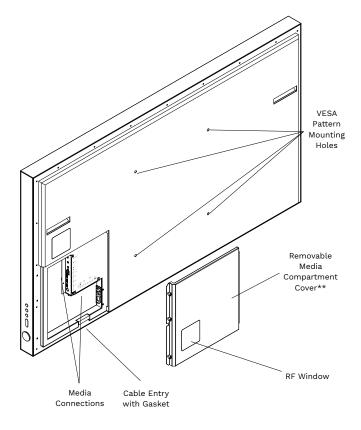

		<b>50 INCH</b> Model: UB4-50	<b>65 INCH</b> Model: UB4-65	<b>85 INCH</b> Model: UB4-85
DIMENSIONS	DIMENSIONS	45.1" w x 26.2" h x 3.8" d	58.2" w x 33.6" h x 3.8" d	76.0" w x 43.6" h x 3.8" d
	WEIGHT	60 lbs.	104 lbs.	187 lbs
	MEDIA COMPARTMENT DIMENSIONS**	Upper portion: 3.9" w x 7.7" h Lower portion: 10.1" w x 5.7" h	Upper portion: 5.1" w x 7.8" h Lower portion: 11.6" w x 5.6" h	Upper portion: 5.1" w x 7.7" h Lower portion: 11.8" w x 5.7" h
	VESA PATTERN	400 x 400mm	400 x 400mm	600 x 400mm
	POWER CONSUMPTION, DISPLAY	Standby: 1.0W	Standby: 3.5W	Standby: 3.5W
	TOWER CONSONITION, DISTERT	Max: 398W	Max: 682W	Max: 1096W
Ë	ELECTRICAL ELECTRICAL	Max: 398W NEMA 5-15P 3-prong 120V Outlet	Max: 682W NEMA 5-15P 3-prong 120V Outlet	Max: 1096W NEMA 5-20P† 3-prong 120V Outlet
OTHER	·	NEMA 5-15P	NEMA 5-15P	NEMA 5-20P†
ОТНЕК	ELECTRICAL	NEMA 5-15P 3-prong 120V Outlet	NEMA 5-15P 3-prong 120V Outlet	NEMA 5-20P† 3-prong 120V Outlet

<sup>\*</sup> Installation in sunlight reduces the maximum permitted air temperature. Extreme Temperature Protection™ utilizes internal fans that are necessary for controlling the internal TV temperature. The fans are performing as designed when creating a low-level hum in warm temperature.

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Séura is under license. Other trademarks and trade names are those of their respective owners.



<sup>†</sup> The 85" model requires a 20 amp circuit with a NEMA 5-20P compatible electrical outlet.

<sup>\*\*</sup> Séura is not liable for damage or destruction to third party devices used with Séura products. If using an IR device (for example, Apple TV and Roku models prior to 2019), you will need to set up CEC control for your streaming device. This option is available in the settings menu of your streaming device. To enable CEC on your Séura TV, go to Menu – Network – Advanced Network Setting – CEC. This allows you to use Séura's TV remote to control the streaming device. If your streaming device device does not use an RF connection and is not CEC compatible, then it will not receive remote control commands when placed in the media compartment. An IR emitter may work in getting a signal to the streaming device.