


# NEW SANUS ELEMENTS™ ALL-IN-ONE IR REPEATER KIT

## Perfect for use with enclosed cabinets or hidden equipment

The Sanus Elements™ ELM501 IR repeater kit makes it easy to give your home theater a clean, seamless appearance — even while you're using it. Our small IR receiver can be located in a discreet location to replicate infrared signals from remote controls. Simply place the repeater hub behind your TV or other components. Simply place the repeater hub behind your TV or other components, and you can operate AV equipment inside closed cabinets with ease. This all-in-one kit contains the necessary elements to control four components, and includes both tabletop and hole mounting options.

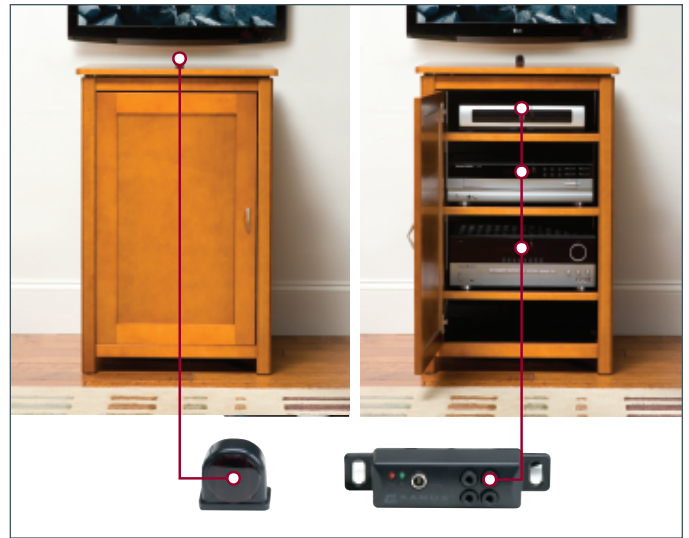

ELM501-B1 shown



Effectively replicates infrared signals from remote controls to reach components stored remotely or hidden in enclosed cabinets



LED status lights provide power and IR signal indication



All-in-one kit contains all necessary elements to control 4 components



Tabletop and hole mounting options included in package



IR repeater filters undesirable signals from sunlight and plasma TVs to provide error-free operation



Frequency range of 30KHz – 60KHz works with multiple AV components

**SANUS**  
ELEMENTS

www.sanus.com • 800.359.5520

# NEW SANUS ELEMENTS™ ALL-IN-ONE IR REPEATER KIT

## MODELS: ELM501-B1

### DESCRIPTION

All-in-one IR repeater kit

### PRODUCT DIMENSIONS (length)

4.25" x 1" x 1"

10.8 x 2.5 x 2.5 cm

### PACKAGE DIMENSIONS (w x d x h)

5.6" x 3" x 5.1"

14.3 x 7.6 x 13 cm

### LIST PRICE

\$119.<sup>99</sup>

- Effectively replicates infrared signals from remote controls to reach components stored remotely or hidden in enclosed cabinets
- IR repeater filters undesirable signals from sunlight and plasma TVs to provide error-free operation
- All-in-one kit contains all necessary elements to control 4 components
- LED status lights provide power and IR signal indication
- Frequency range of 30KHz – 60KHz works with multiple AV components
- Tabletop and hole mounting options included in package



ELM501-B1 shown



Error-free operation



Reach components stored remotely or in cabinets



All-in-one kit



LED status lights



30KHz – 60KHz frequency range



Includes tabletop and hole mounting options

