



Product: 48 Inch Gas Range in Stainless Steel
Model Number: LRG4807U / LRG4807ULP

TECHNICAL DETAILS

Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	120V
Circuit Breaker (A)	15 or 20A
Frequency (Hz)	60 Hz

BURNER PERFORMANCE

Total Burners	6
Front Right (Single)	12,000 BTU
Front Left (Single)	12,000 BTU
Front Middle (Single)	18,000 BTU
Rear Right (Single)	12,000 BTU
Rear Left (Single)	12,000 BTU
Rear Middle (Single)	12,000 BTU
Griddle Burner	15,000 BTU
Tube Broil burner	10,000 BTU
U-shape burner (30" Oven)	22,000 BTU
Tube burner (18" Oven)	14,000 BTU



FEATURES & BENEFITS

- + **High-Powered BTU Burners** - The high-powered 18,000 BTU burner provides fast, intense heat for creating large family meals and restaurant-quality dishes
- + **Oven Capacity** - Dual ovens at 4.6 cu. ft. and 2.2 cu. ft. capacity allow you to cook multiple dishes at a time
- + **Griddle Feature** - The 15,000 BTU griddle offers additional cooking space and flexibility
- + **Storage Space** - Storage drawer provides additional storage space for cooking trays and other kitchen utensils.
- + **Convection Fan** - Commercial convection fan provides controlled heat distribution for fast and efficient cooking
- + **Continuous Cast-Iron Grates** - Heavy-duty continuous cast-iron cooking grates that can handle any size cookware
- + **Even Heat Broiler** - Reflective gas tube broiler distributes heat evenly to sear your food and seal in the juices
- + **Pro-style Knobs** - Black ABS burner control knobs add style to the bold range design
- + **Porcelain Spill Tray** - Single-piece black porcelain spill tray catches the mess and makes cleanup easy
- + **Porcelain Interior** - The gray porcelain oven interior adds a stylish touch and is easy to clean

ACCESSORIES (NOT INCLUDED)

Liquid Propane Gas Conversion Kit	LPKLRG4807U
Cast Iron Reversible Griddle	RG1022

WARRANTY: TWO YEAR PARTS AND LABOR




PRODUCT DIMENSIONS

Product Width	47 7/8"
Product height (from bottom to top of back splash)	36 1/2" - 37 1/2"
Product height (from bottom to top of side panel)	34 7/8" - 35 7/8"
Product depth (from back panel to bullnose)	27 1/2"
Product depth (from back panel to control board)	26 3/8"
Product depth (from back panel to side panel front)	24"
Depth of control panel (minimum)	2 5/16"
Depth of control panel (bullnose)	3 1/2"
Adjustable Legs	Not to Exceed 1"

REQUIRED CUTOUT SIZE

48 1/8" x 25" x 34 7/8" (+1")

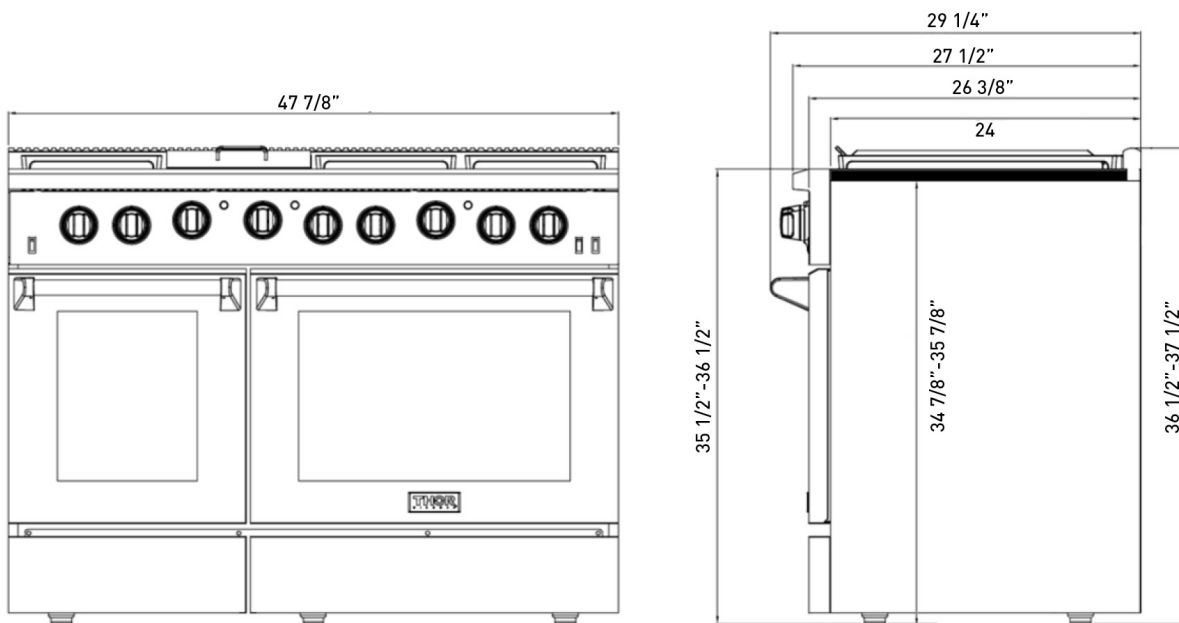

NG: Input Pressure: 7 inches,
Output Pressure: 5 inches
LP: Input Pressure: 11 inches
Output Pressure: 10 inches
Size of Regulator: 3/4 inch

