

IR36550/S/T



## FEATURES

The scratch-resistant, ceramic glass induction cooking surface provides consistent, precise temperature control and nearly instantaneous temperature adjustment response

Wolf's Dual VertiCross™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Ten cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm, were developed by Wolf chefs to maximize the performance of your oven

The sleek rangetop features a striking interactive display. The full-color touch screen is intuitive, easy to read, and locks for safety and cleaning

Boost Mode delivers rapid heat for 40% faster boil times, rivaling the speed of gas and electric

The Bridge function joins two induction zones into one large area, enabling use of an induction-capable griddle, open roaster, or fish poacher

Cleaning is simple. The smooth, black ceramic glass surface resists scratching and staining, and wipes clean

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature

The oven's Wi-Fi enabled feature lets you remotely preheat, select modes, and adjust oven temperature from your mobile device

The range's stainless steel construction and clean lines coordinate elegantly with a full suite of transitional style Sub-Zero, Wolf, and Cove appliances

## ACCESSORIES

30" Broiler Pan

36" Full-extension ball-bearing oven rack

36" Standard Oven Rack

Bake Stone Kit

Temperature Probe

2 1/2" Rear Caster Covers

3" Rear Caster Covers

3 1/2" Rear Caster Covers

4" Rear Caster Covers

4 1/2" Rear Caster Covers

3 3/4" (95) Front Leg Covers

3 1/2" Front leg covers


4" Front leg covers

4 1/2" Front leg covers

2 1/2" Stainless Steel Kickplate



## TOP CONFIGURATION



## COOKTOP SPECIFICATIONS

- Five induction zones
- 4 - 2,100 W Zones with 3,700 W Boost
- 1 - 2,600 W Zone with 3,700 W Boost

3" Stainless Steel Kickplate

---

3 1/2" Stainless Steel Kickplate

---

4" Stainless Steel Kickplate

---

4 1/2" Stainless Steel Kickplate

---

2 1/2" Stainless Steel Kickplate

---

3" Stainless Steel Kickplate

---

3 1/2" Stainless Steel Kickplate

---

4" Stainless Steel Kickplate

---

4 1/2" Stainless Steel Kickplate

---

2 1/2" Stainless Steel Kickplate

---

3" Stainless Steel Kickplate

---

3 1/2" Stainless Steel Kickplate

---

4" Stainless Steel Kickplate

---

4 1/2" Stainless Steel Kickplate

---

2 1/2" Stainless Steel Kickplate

---

3" Stainless Steel Kickplate

---

3 1/2" Stainless Steel Kickplate

---

4" Stainless Steel Kickplate

---

4 1/2" Stainless Steel Kickplate

---

Rear Caster Covers

---

Front Leg Extension Covers

---

Stainless Steel Kickplates

Accessories available through an authorized dealer.


For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).

Specifications are subject to change without notice. This information was generated on January 14, 2021. Verify specifications prior to finalizing your cabinetry/enclosures.

**PRODUCT SPECIFICATIONS**


Model	IR36550/S/T
Dimensions	35 7/8"W x 35 1/2"H x 28 1/4"D
Oven 1 Interior Dimensions	31 1/4"W x 17 1/2"H x 20"D
Oven 1 Usable Capacity	4.1 cu. ft.
Oven 1 Overall Capacity	6.3 cu. ft.
Door Clearance	19 1/2"
Weight	445 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	50 amp dedicated service

**ELECTRICAL**




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

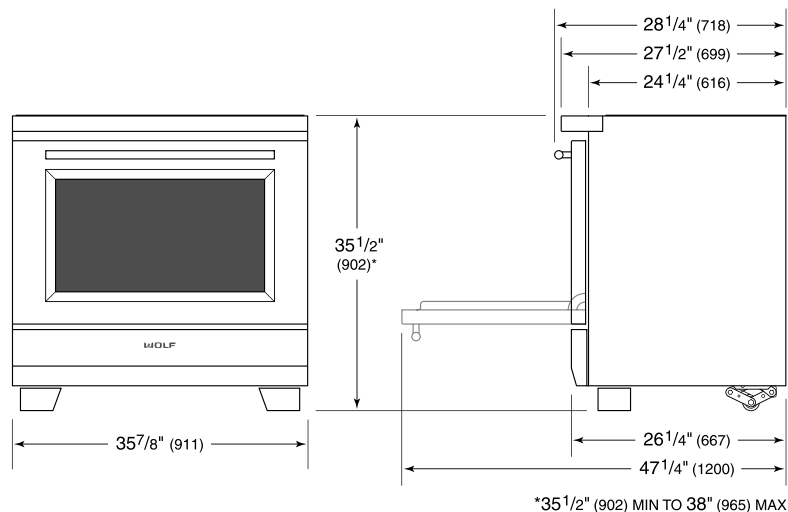

**STANDARD INSTALLATION**

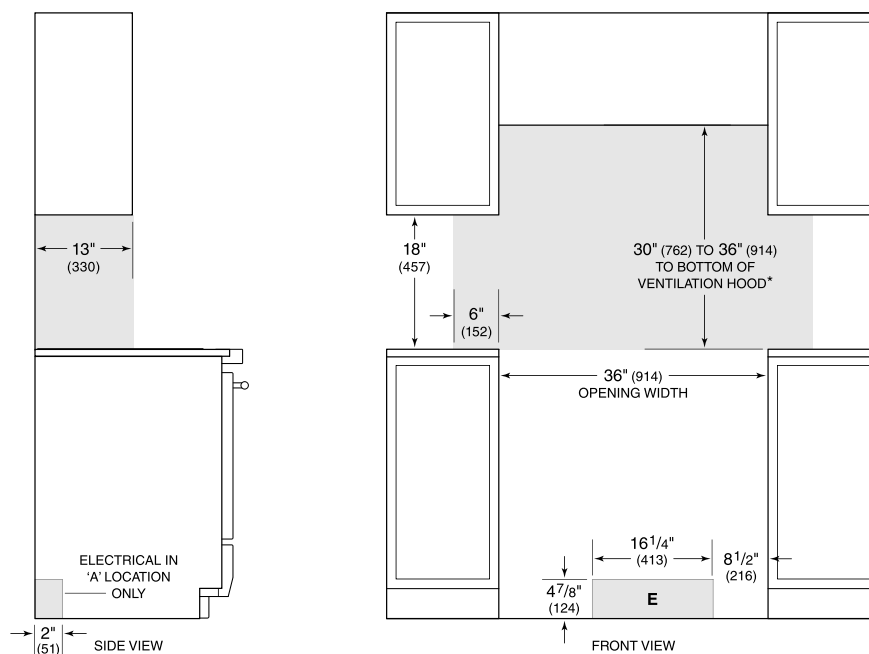

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials.

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.