




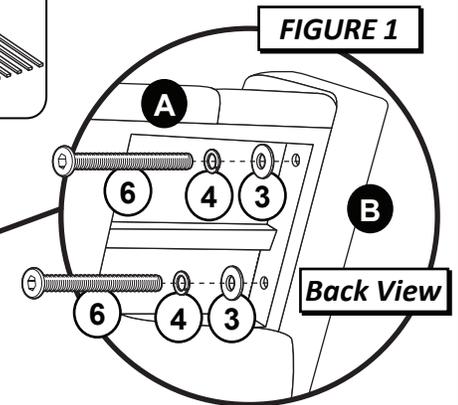


Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000 **HDFBP**

| CODE | QTY | HARDWARE | |
|------|-----|---------------------|---|
| 1 | 8 | 30mm Wood Screws |  |
| 2 | 8 | M8*40mm Allen Bolts |  |
| 3 | 12 | M8 Flat Washers |  |
| 4 | 12 | M8 Spring Washers |  |
| 5 | 1 | M8 Allen Wrench |  |
| 6 | 4 | M8*50 Allen Bolts |  |

| CODE | QTY | COMPONENTS | CODE | QTY | COMPONENTS |
|------|-----|---|------|-----|--|
| A | 1 | Back Panel  | B | 2 | Side Panels  |
| C | 1 | Front Rail  | D | 1 | Rear Rail  |
| E | 14 | Plywood Slats  | | | |

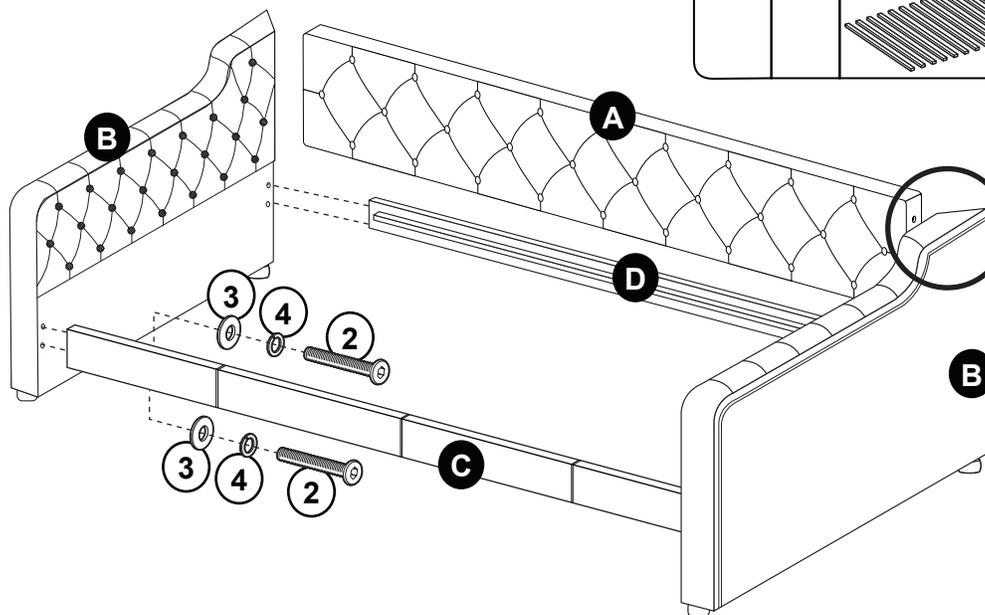

STEP 1 - Figure 1

Attach Back Panel (A) in between both Side Panels (B) by aligning the holes and securing with 2 Allen Bolts (6), 2 Spring Washers (4) & 2 Flat Washers (3) from the backside per each end. Do not fully tighten bolts for this step.

STEP 2


Next attach the Rear Rail (D) to the back of each Side Panel (B) by aligning the holes and securing with 2 Allen Bolts (2), 2 Spring Washers (4) and 2 Flat Washers (3) per each end. Do not fully tighten bolts for this step.

STEP 3

Attach the Front Rail (C) to the inside of each Side Rail (B) in the front by aligning the holes and securing with 2 Allen Bolts (2), 2 Spring Washers (4) and 2 Flat Washers (3) per each end. Tighten all bolts from Steps 1 through 3 using the Allen Wrench (6) that has been provided.

STEP 4 - Figure 2

Insert both ends of each Plywood Slat (E) onto the Front and Rear Rails (D & C) and secure with 8 Wood Screws (1). The assembly is now complete.

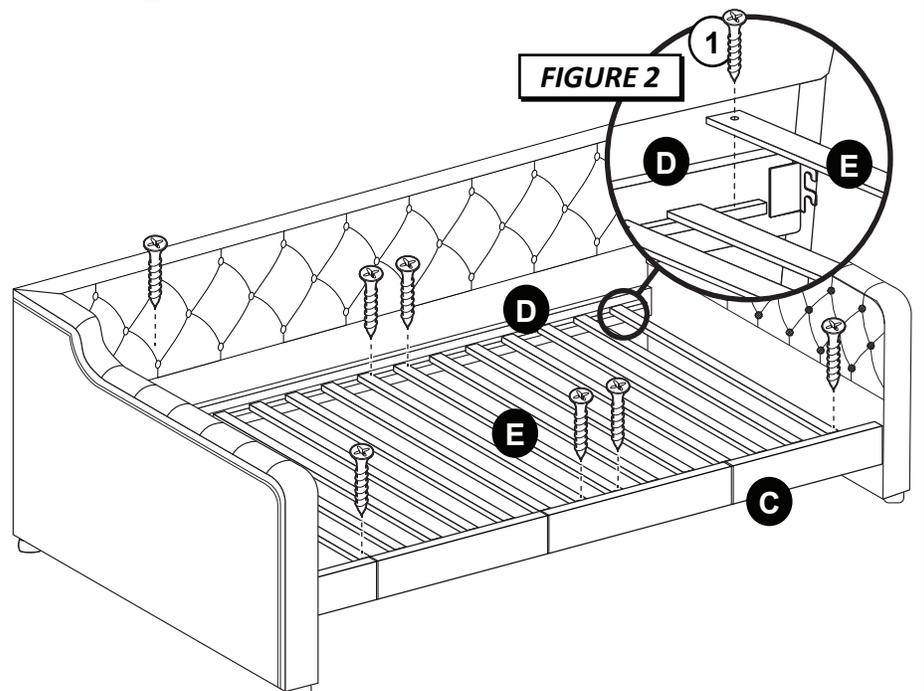

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000 HDFBP

| CODE | QTY | HARDWARE | |
|------|-----|---------------------|---|
| 1 | 8 | M8*20mm Allen Bolts |  |
| 2 | 8 | 30mm Wood Screws |  |
| 3 | 24 | 20mm Wood Screws |  |
| 4 | 6 | Casters |  |
| 5 | 8 | Flat Washers |  |
| 6 | 8 | Spring Washers |  |
| 7 | 1 | 1/4" Allen Wrench |  |

| CODE | QTY | COMPONENTS | CODE | QTY | COMPONENTS |
|------|-----|-------------|------|-----|---------------|
| A | 1 | Front Panel | B | 2 | Side Panels |
| C | 1 | Back Panel | D | 14 | Plywood Slats |

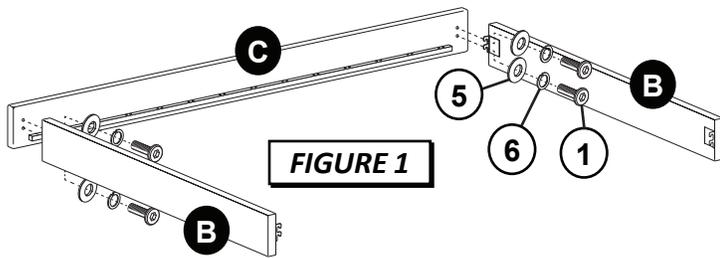


FIGURE 1

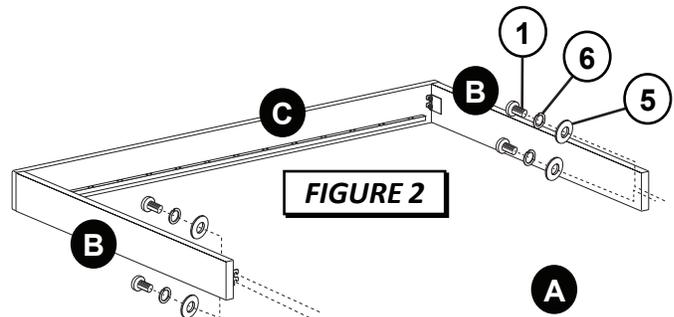


FIGURE 2

STEP 1 - Figure 1

Attach each Side Panel (B) to inside of Back Panel (C) by aligning bracket with holes on Back Panel (C) and securing in place with 2 Allen Bolts (1), 2 Spring Washers (6) and 2 Flat Washers (5) per side. Tighten all bolts using Allen Wrench (7) provided.

STEP 2 - Figure 2

Attach Front Panel (A) to each assembled Side Panel (B) from Step 1 by aligning bracket with holes and securing in place with 2 Allen Bolts (1), 2 Spring Washers (6) and 2 Flat Washers (5) per side. Tighten all bolts using Allen Wrench (7) provided.

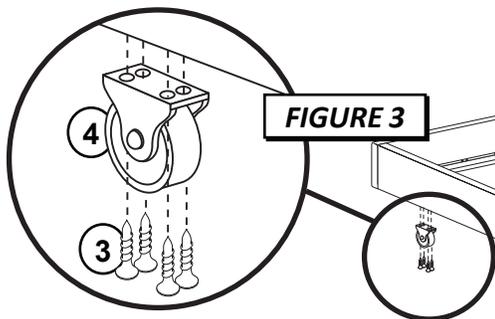


FIGURE 3

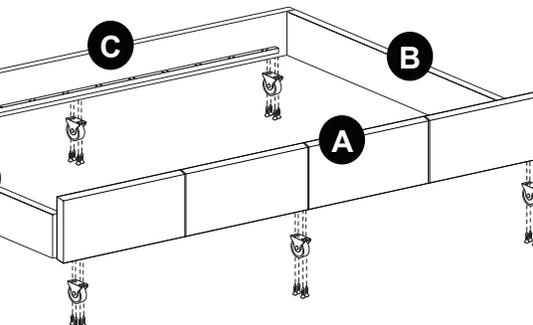



FIGURE 4

STEP 3 - Figure 3

Attach 3 Casters (4) to bottom of Back Panel (C) and 3 Casters (4) to bottom of Front Panel (A) using 4 Wood Screws (3) per caster. Tighten all screws with philips head screwdriver (not included).

STEP 4 - Figure 4

Insert both ends of each Plywood Slat (E) onto the Front and Back Panels (A & C) and secure with 8 Wood Screws (2).

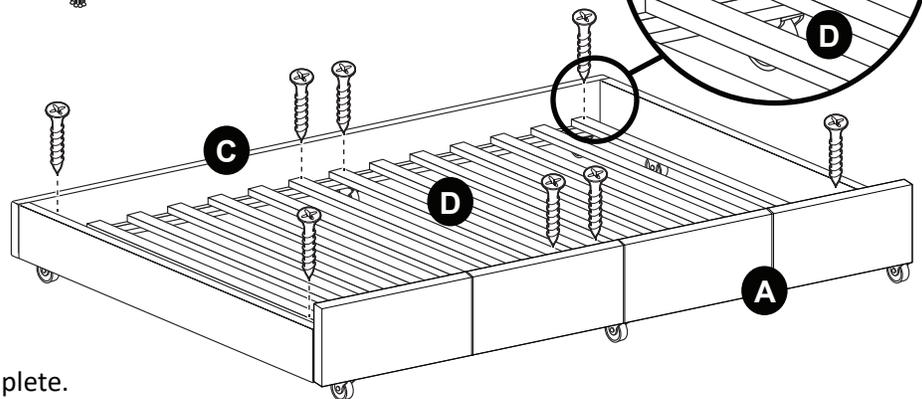

The assembly of the Daybed Trundle is now complete.