



TKP-9600 OWNER'S MANUAL



TOTAL CONTROL

Introducing the TKP-9600

Thank you for purchasing URC's TKP-9600 In-Wall Network Keypad. Its easy and intuitive use helps to simplify your life while adding control of more things than you thought possible.

Online Support

Total Control is sold direct only and must installed/program by a certified custom integrator.

End-User Support

Visit the [URC Home Page](#) for product information, owner's manuals, and support contact information.

Contact Support

Total Control is a URC product sold direct only. For questions or assistance contact your Custom Installer/Programmer.

My Installer/Programmer



Technical Support

Toll Free: 800-904-0800

Main: 914-835-4484

techsupport@urc-automation.com

Hours: 9:00am - 5:00pm EST M-F

Table of Contents

Features and Benefits.....1	Removing Shortcuts..... 15
Updated User Experience1	Status Bar 16
Audio-Video Interface1	Intercom 18
Proximity Sensor2	Navigating the Intercom Menu.. 20
Flexible Orientation2	Making Calls: Audio-Video 21
TKP-9600 Installation Guidelines4	Making Calls: Audio Calls 23
Unlocking the TKP-96004	Making Calls: Audio Broadcast. 25
Releasing the Tamper Resistant Lock.....4	Do Not Disturb Mode 27
For New Construction.....5	Scenes Menu28
For Retrofit Boxes6	Settings Menu29
Mounting Plate Orientation6	Sleep Settings 30
Main Menu Navigation7	General 31
Main Menu: View Modes8	Sound 32
Title Bar9	Brightness..... 32
Room's Menu10	Proximity Sensor 33
Room Linking.....11	System Information 34
Now Playing12	Network 35
Core Buttons13	Intercom 36
Shortcut Popup Menu14	Factory Default..... 37
Adding Shortcuts14	Specifications 38
	Limited Warranty Statement..... 38

TOTAL CONTROL

Features and Benefits

The TKP-9600 In-Wall Network Keypad is one of URC's most advanced devices that is optimized for usage with Total Control.


Enjoy these key features:

Updated User Experience

This device has the capability of using URC's Total Control software suite. Using this software provides this device with a modern "look and feel" giving the end-user an improved user experience in terms of graphics, performance, and features.


Audio-Video Interface

Communicate with any other URC Intercom-Enabled device in the system with this feature. The end-user can make Audio-Video, Audio, or Audio Broadcast calls directly from the TKP-9600.

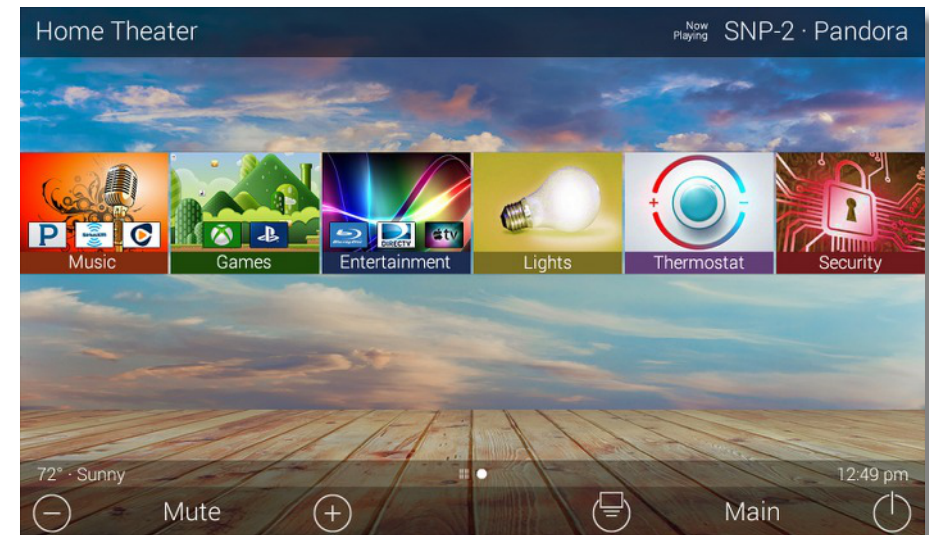

Proximity Sensor

This feature allows the TKP-9600 to spring into action automatically. Utilizing its proximity sensor, the keypad can detect distances from up to three (3) feet away. This setting can be adjusted in the device's Settings menu.

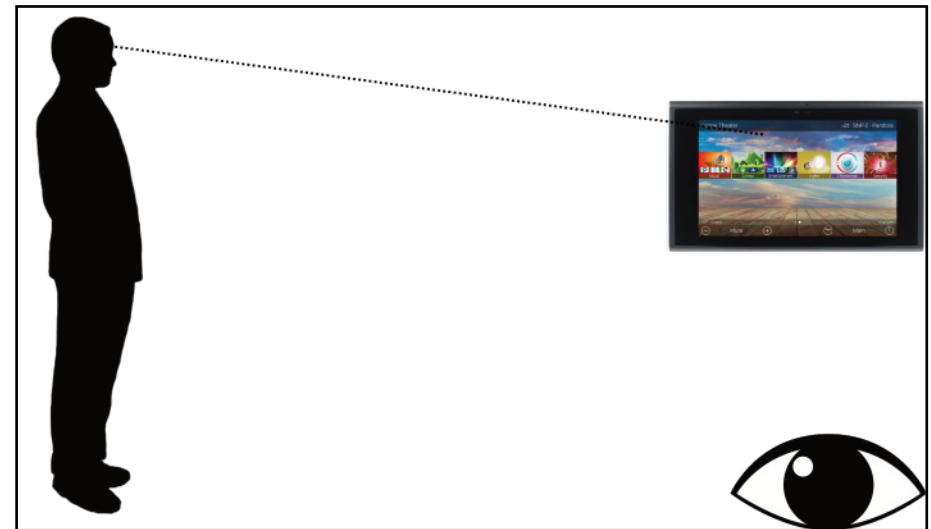

Flexible Orientation


The TKP-9600 offers the ability to display the device in either portrait or landscape mode making it the perfect keypad for almost any room. This feature can only be set from within the Accelerator software, speak to a custom home professional prior to installation.




Part List

Included in the TKP-9600:


- 1x - TKP-9600 Network Keypad
- 1x - Mounting Ring
- 4x - Mounting Screws
- 4x - Spacers
- 2x - Ribbon Spacers

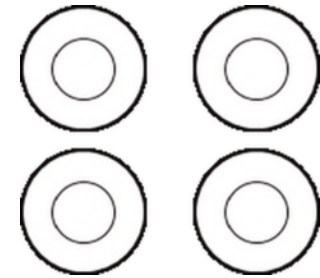


Spacers

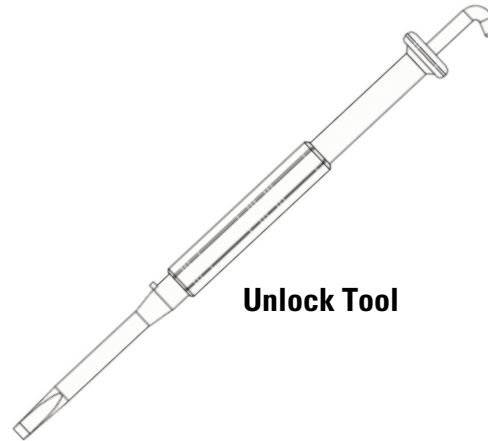


Unlock Tool

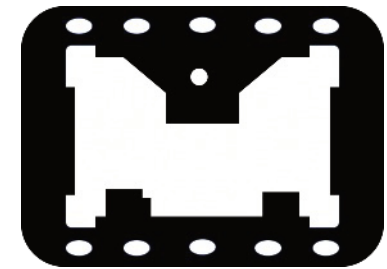


Mounting Ring

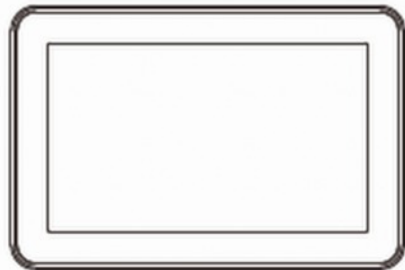

TKP-9600



Ribbon Spacers

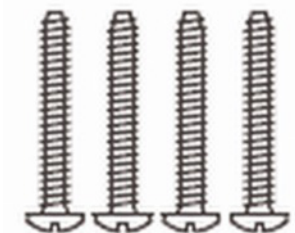

Mounting Screws

TKP-9600 Installation Guidelines


Unlocking the TKP-9600

Prior to installing the TKP-9600 **ALWAYS** make sure to release the tamper lock. Failing to do so could cause physical damage to the TKP-9600.

Releasing the Tamper Resistant Lock

The lock is located at the top of the TKP-9600 and requires the supplied tool in order to unlock.

To unlock the TKP-9600 use engage the tool into the lock and gently lift up. The lock remains recessed and the TKP-9600 can be removed

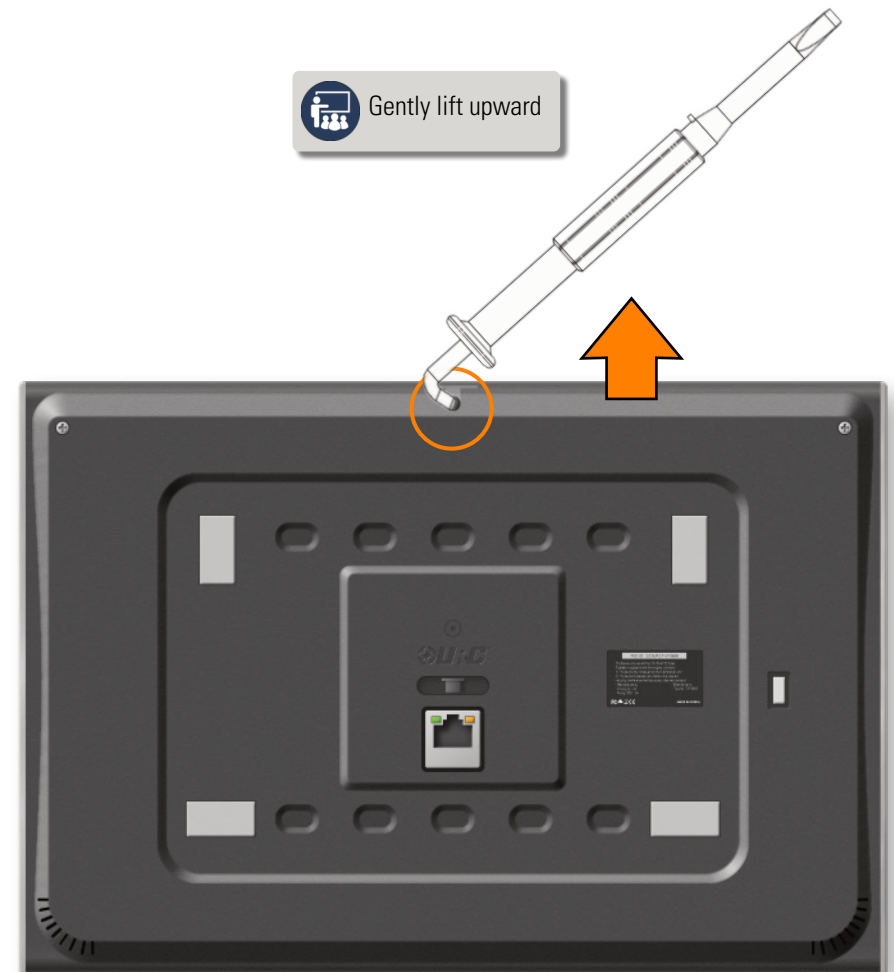

TOTAL CONTROL


For New Construction

The TKP-9600 fits into any 3-gang or 2-gang box. However, there are certain aspects of the installation that must be highlighted.


When installing a 3-gang or a 2-gang box it sits recessed in the wall as seen on the image to the right. The TKP-9600 cannot fit into the mounting plate properly.

Due to the unique design of the TKP-9600, the mounting plate must be installed with the ribbon spacers (supplied in the box).

These strips must be placed on the backside (side facing the wall) of the mounting plate. This allows the mounting plate to sit above the wall and properly mount the TKP-9600.

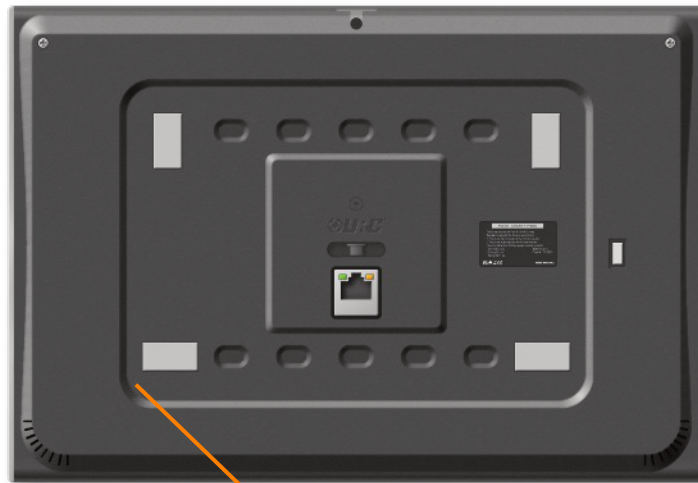

This area is recessed.

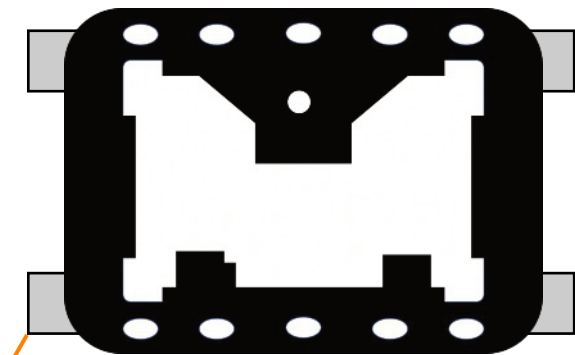

MOUNTING PLATE

(not actual size)

Place the ribbon spacer on the top and bottom of the mounting plate (backside). Remember to place these on the side facing the wall.

TOTAL CONTROL

For Retrofit Boxes


Installing the TKP-9600 into a retrofitted 3-gang or 2-gang box is easy. The mounting plate must be installed directly onto the 3-gang/2-gang box. The frame of the retrofit box provides ample space for the TKP-9600 to mount properly on the mounting plate.

The mounting plate is magnetic and attached to the back of the TKP-9600 easily. Prior to installing the TKP-9600, assure the the **lock is disengaged**.

Mounting Plate Orientation

Notice the orientation of the mounting plate. The image at the right has the mounting plate installed on a 2-gang retrofit box. When installing the mounting plate assure that the notch is pointing down toward the center.

There are up arrows engraved into the mounting plate to visually assist with the installation. The image below (although a replica) represents how the mounting plate must be installed.

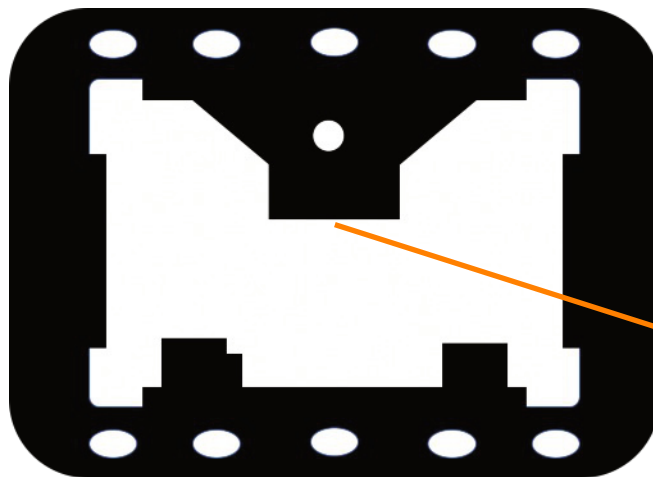

This portion connects and holds the TKP-9600 in place. It must be positioned as seen here.


TOTAL CONTROL

Main Menu Navigation

Although specific screen design and certain options are dictated by the custom integrator that programmed the Total Control system, the general layout remains the same.

Actual navigation is performed via screen swipes:

- **Left Swipe:** Swipe left to reveal additional Main Menu pages. The amount of pages available on the Main Menu is dictated by the custom integrator.
- **Right Swipe:** Swipe right to reveal the Scenes Menu. The Scenes Menu contains URC Scenes that are created by the custom integrator. Return to the Main Menu by swiping left from the Scenes Menu.
- **Button Tapping:** On the Main Menu selecting each of these areas provide the end-user with control:
 - Category/Device Ribbon:** Select a Category button to reveal the associated sub-menu OR select a Device located here to access that devices menu. This is dictated by the custom integrator.
 - Rooms Menu:** Select the Room Name to access the Room's Menu. This menu allows the end-user to control another room and more.
 - Volume Control:** Tap the minus (Vol-) to lower the volume, plus (Vol+) to increase the volume, and Mute to mute the volume.
 - Shortcuts:** Select this button to reveal the Shortcuts Popup menu. The end-user can add up to six (6) items on this menu.

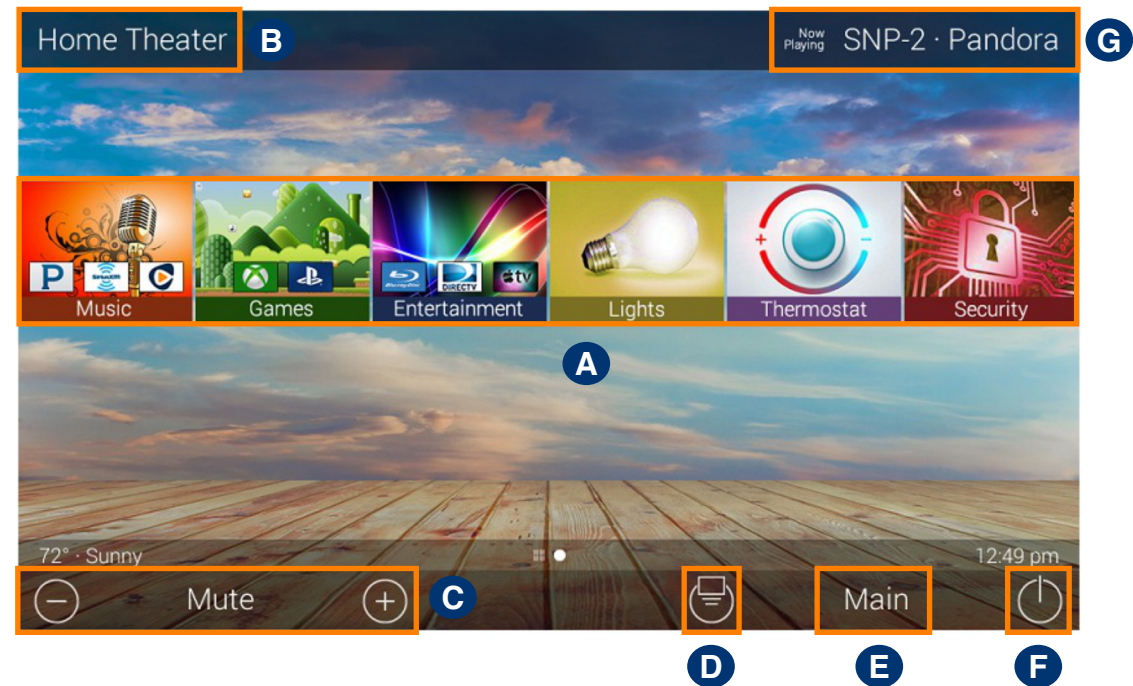

- Main:** Select this to return to the Main Menu regardless of what page the device is currently on. This can be changed to return to the Scenes Menu, speak with the custom integrator to program the TKP-9600 this way.
- Room Power Off:** Select this button to turn off the current room.
- Now Playing:** Select the Now Playing button at the top to instantly jump into that device/activity's menu pages.



Main Menu: View Modes

Total Control features two different view modes for the TKP- 9600. Each view mode has its own unique properties that compliment the user experience.



The view mode must be programmed from within the Accelerator software, speak to a custom home integrator for more details.

1. **Ribbon View:** This is the default view mode and it contains up to six (6) items per page.

Ribbon View (Landscape & Portrait)

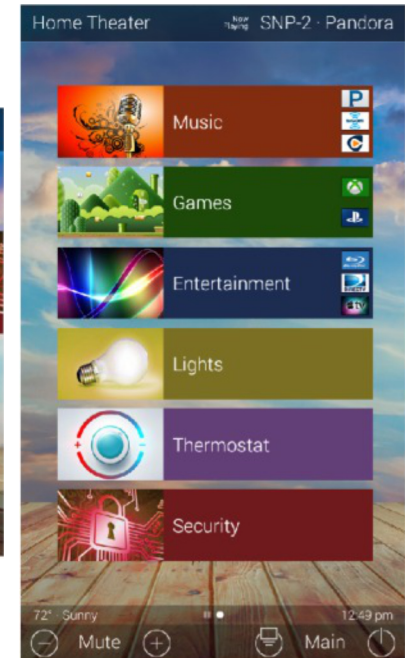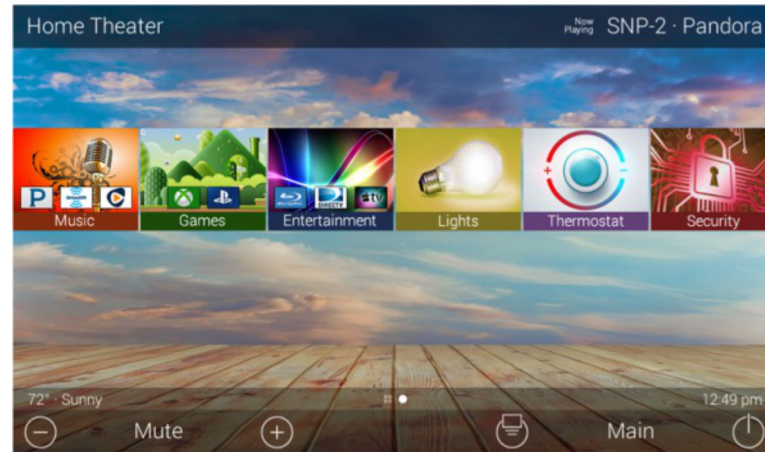

Grid View (Landscape & Portrait)

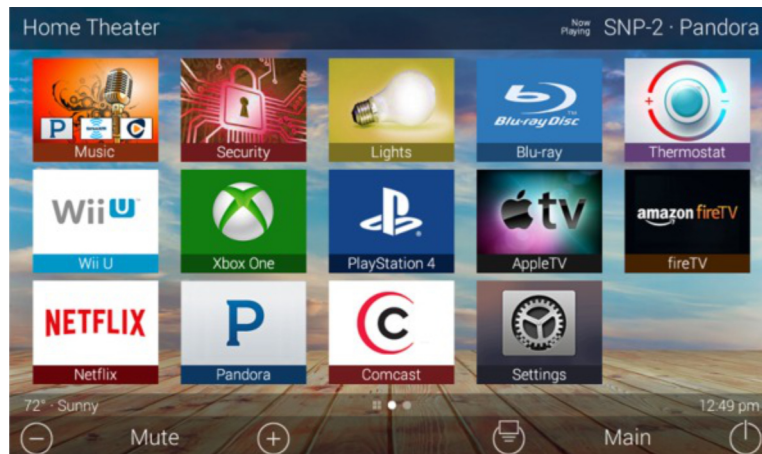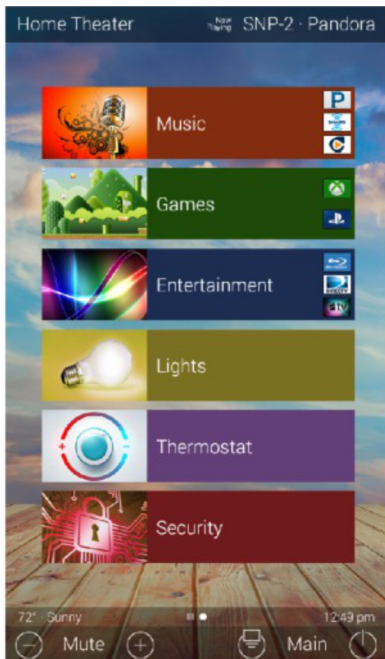

2. **Grid View:** This view mode contains up to fifteen (15) items per page.

TOTAL CONTROL

Title Bar


The **Title Bar** is always present regardless of what menu and/or room the TKP-9600 is currently using.

On the left of the **Title Bar**, the current room the TKP-9600 is controlling is displayed. Selecting it reveals the **Rooms Menu**.

At the right of the **Title Bar** is the **Now Playing** area. This displays which device/activity is currently active. Selecting it returns the interface to the device/activity's menu for control.

The **Title Bar** is located at the very top of the display. To access its menu, swipe down as depicted on the image to the right. There are three (3) selectable options here:

1. **Close:** Select this to hide the Title Bar Menu.
2. **Weather Module:** Select this to display the Time and Weather Module, this feature requires the home location. This location is set from within the Accelerator software.
3. **Intercom:** Select this button to display the Intercom Menu. This menu displays all available Intercom-Enabled device (clients). Please see this documents Audio-Video Intercom section for more details.
4. **Settings:** Select this button to access the TKP-9600's Settings Menu. The various parts of the Settings Menu are explained in detail in a later section of this document.

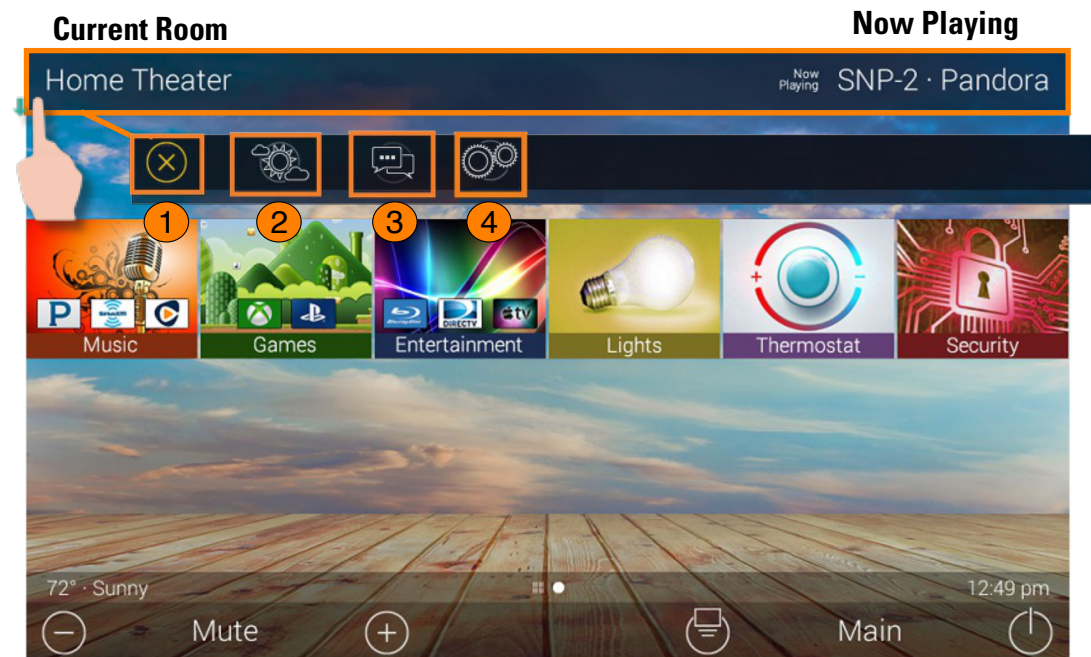

TOTAL CONTROL

Room's Menu



Tap on the Room Name located on the left in the Title Bar to display the **Room's Menu**.

The **Room's Menu** contains every room programmed into the system. Specific rooms may be hidden from certain interfaces, speak to the custom home integrator for that option.

Each room is given a **Room Name** and customized image to represent that room. Additionally, the **Room's Menu** can be used for controlling volume, turning off the lights, or completely powering off a specific room.

Here are the selectable buttons in the **Room's Menu**:

1. **Volume Control:** Select this button to reveal the Vol +, Vol -, and Mute icons. This button is available on any room with audio sources.
2. **Lights Off Action Command:** This button is programmed by the custom integrator and can be set to turn off all the lights in a particular room.
3. **Room Off:** Select this button to turn off all the devices in that particular room. This button can only be used to turn off a room.
4. **Now Playing:** This section displays what device/activity is currently active in that room. Selecting this jumps the TKP-9600 to that device/activity's menu for control.
5. **Room Linking:** This feature is only available on DMS Audio device. It is used to link DMS Zones/Areas. This means having one menu that controls volume for multiple zones simultaneously or individually.

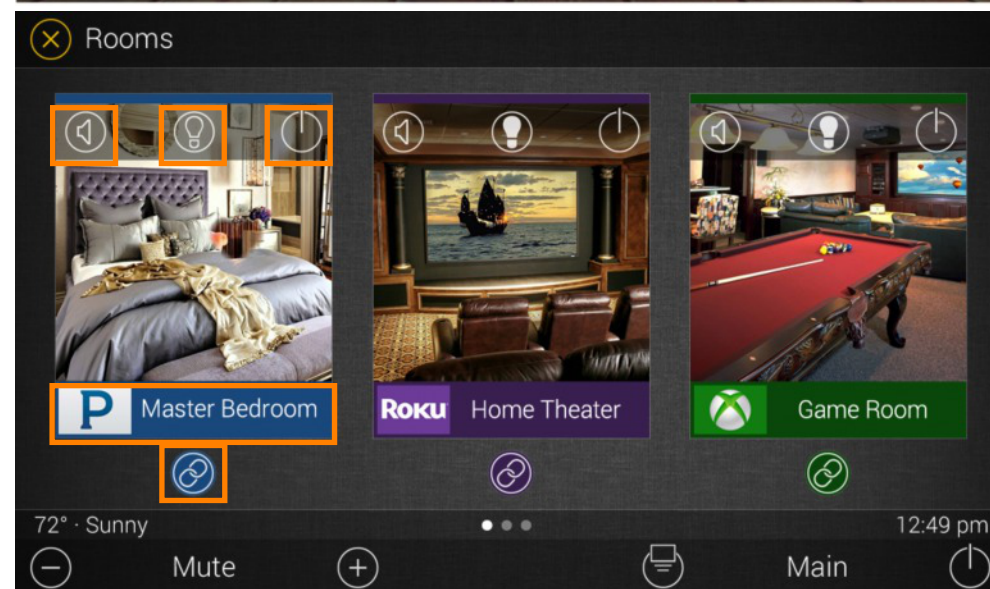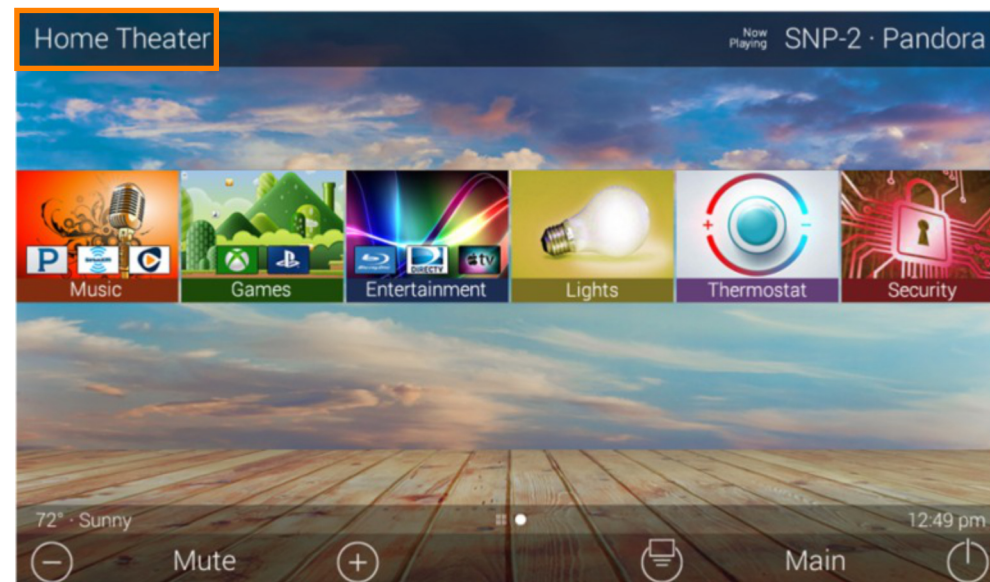




TOTAL CONTROL

Room Linking

Remember, Room Linking can only be used by DMS Zones/Areas. The following steps take place from within the Room's Menu:

1. Select the **Room Link** button, this displays the **Room Linking Menu**.
2. Select which **rooms** in the system to link. Only rooms that are DMS Zones/Areas appear on the Room Linking Menu.
3. Select the **Check** to confirm.

These rooms are now linked. It is possible to control volume on all of these rooms from one menu (see below). Control the volume of each Linked Zone/Area individually or simultaneously using the All Linked Rooms volume slider.

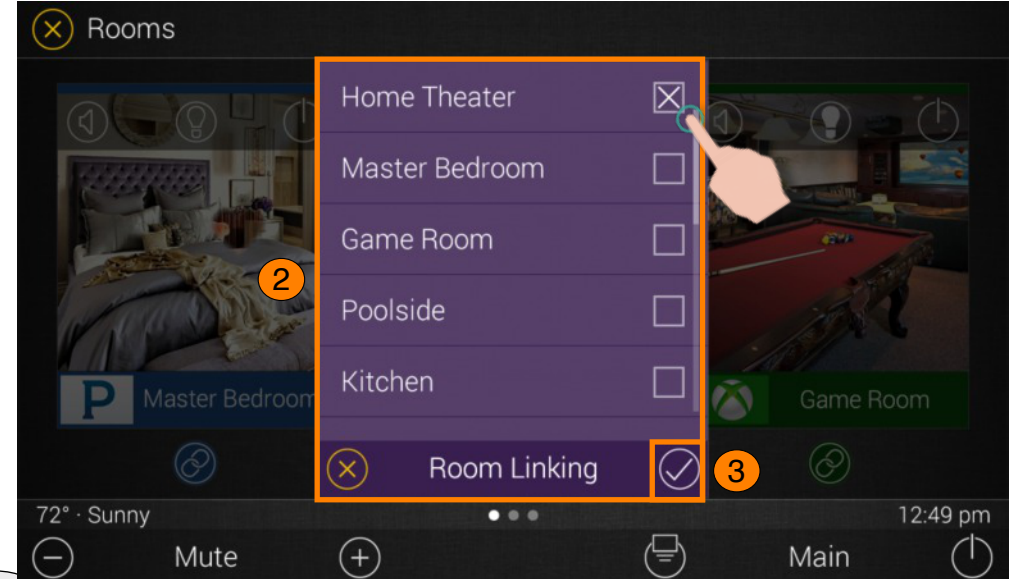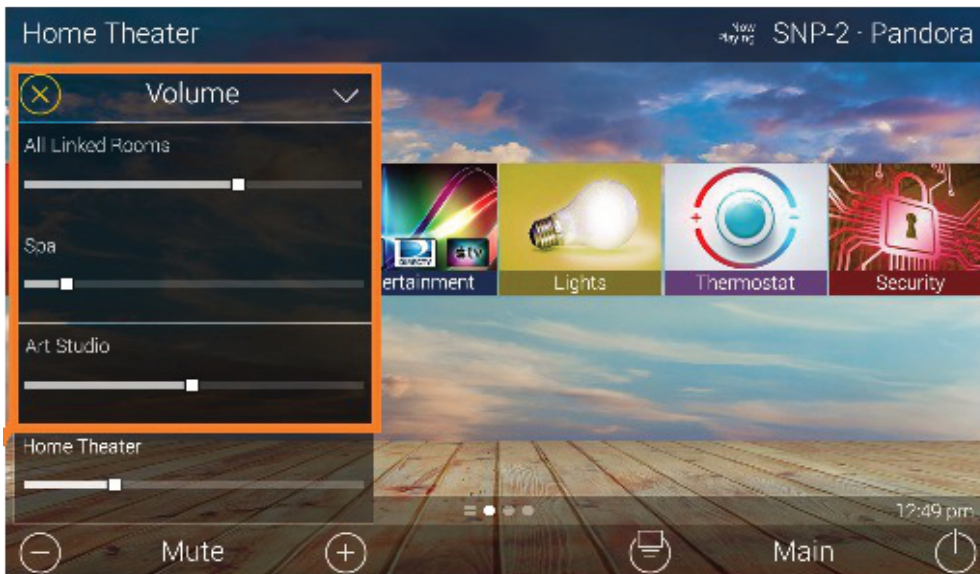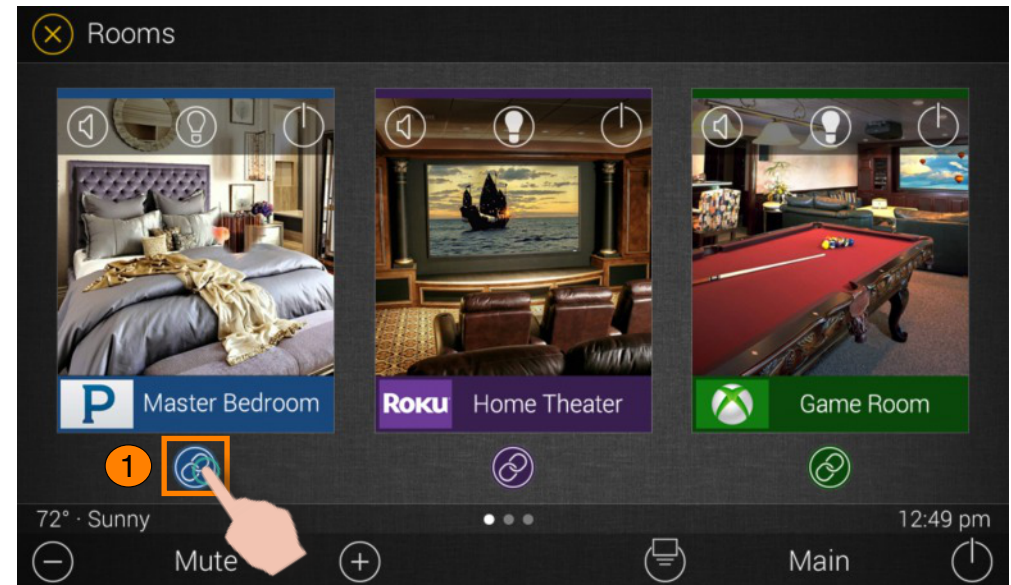


Now Playing

On the right hand side of the Title Bar is the Now Playing area. The Now Playing area always dictates what activity is currently playing in the room.

In the example at the right, **Now Playing** reads “**SNP-2 Pandora**”. This means that in the Home Theater the SNP-2 is using Pandora currently.

Tapping the Now Playing area jumps the TKP-9600 to the menu for the device in that section. In the example this mean that, once tapped, the interface jumps to the SNP-2 device menu for control.

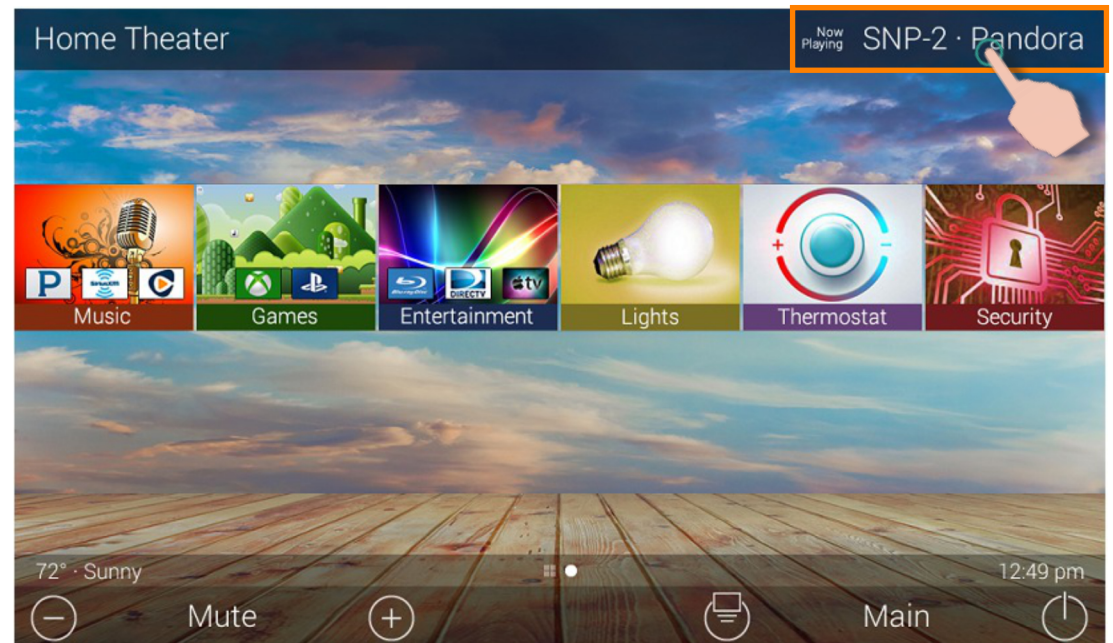


TOTAL CONTROL

Core Buttons

These buttons are almost always on display. Each one of these buttons has a specific function:

- A. Volume:** Used to control an active audio device.
- B. Shortcut Popup:** Use this to display the Shortcut Popup Menu. This menu contains up to six (6) current room activities.
- C. Main:** Select this to return to the Main Menu regardless of what menu the interface is currently in use.
- D. Room Off:** Use this button to turn off the current room.

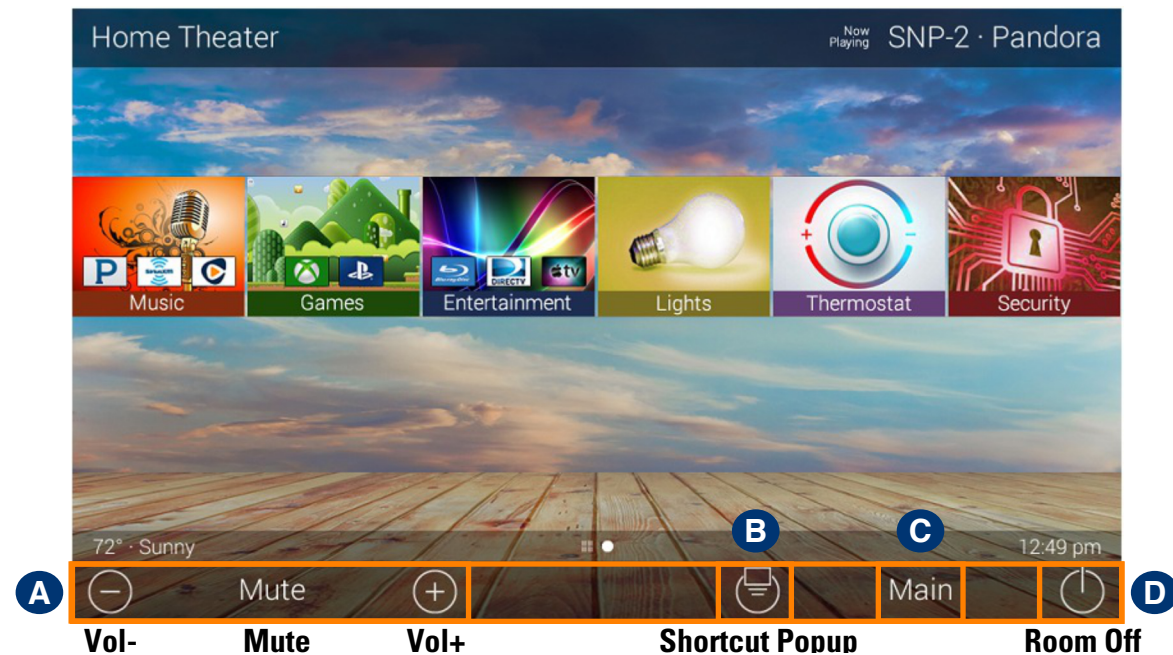

TOTAL CONTROL


Shortcut Popup Menu

The **Shortcut Popup Menu** holds the end-user's favorite or most frequently used devices/activities and places them in one easy to access location.

Adding Shortcuts

Follow these steps to add a Shortcut:

1. Locate an available button and hold it down until the status bar on the top of the display fills. As stated on the bottom of the interface "Press and Hold to Add or Remove". A list of device/activities for that room a presented in the Add a Shortcut Menu.
2. Select a device/activity. This adds that item to the Shortcut Popup Menu.

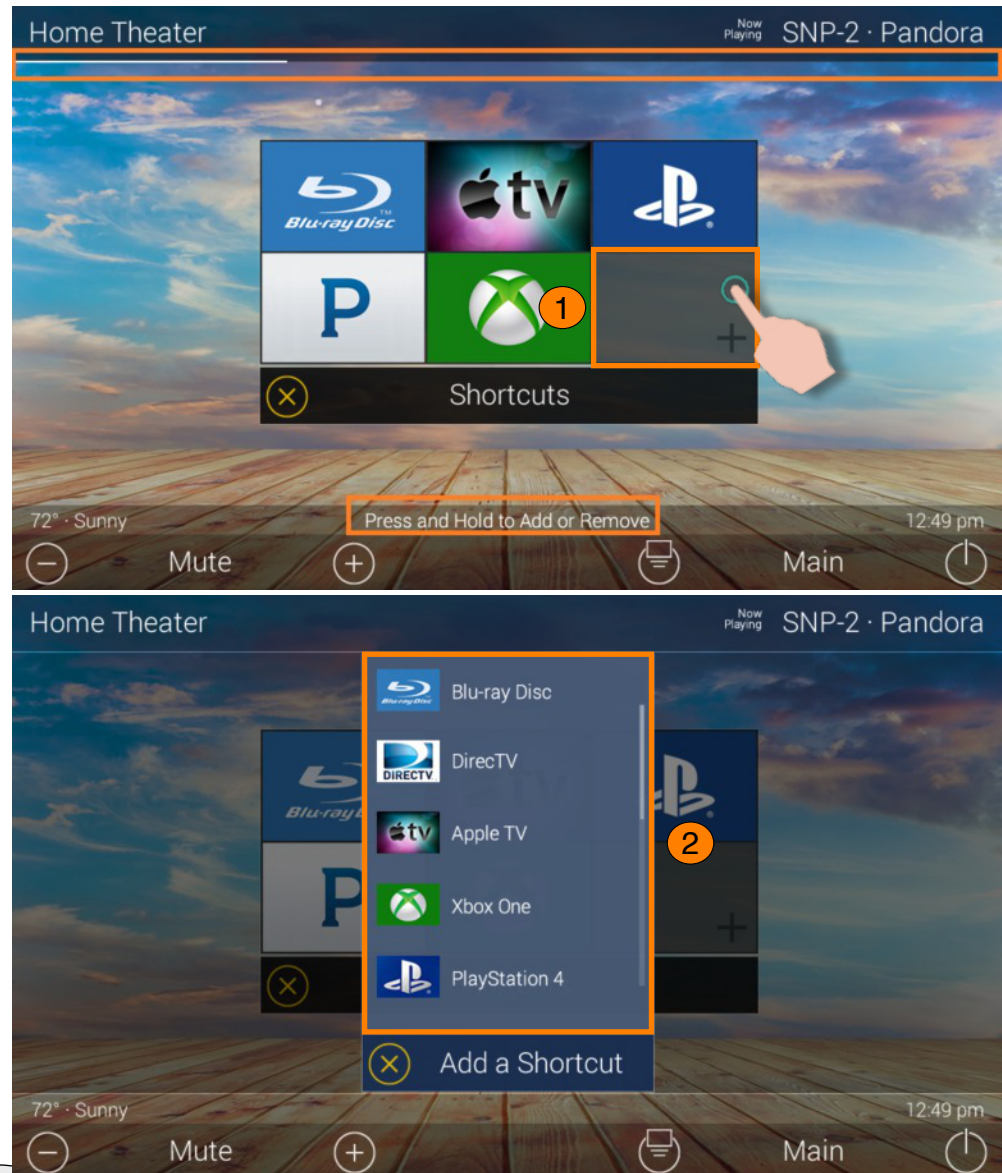


Just tap on a Shortcut button to launch that device/activity. Remember, this menu can only hold up to six (6) items and each item must already be a device/activity programmed into that current room.

Removing Shortcuts

Follow these steps to remove a Shortcut:

1. From the Shortcut Popup Menu, **press and hold** the Shortcut that needs to be deleted.
2. Hold the button until the **Remove a Shortcut** window displays.
3. Select **Remove**.

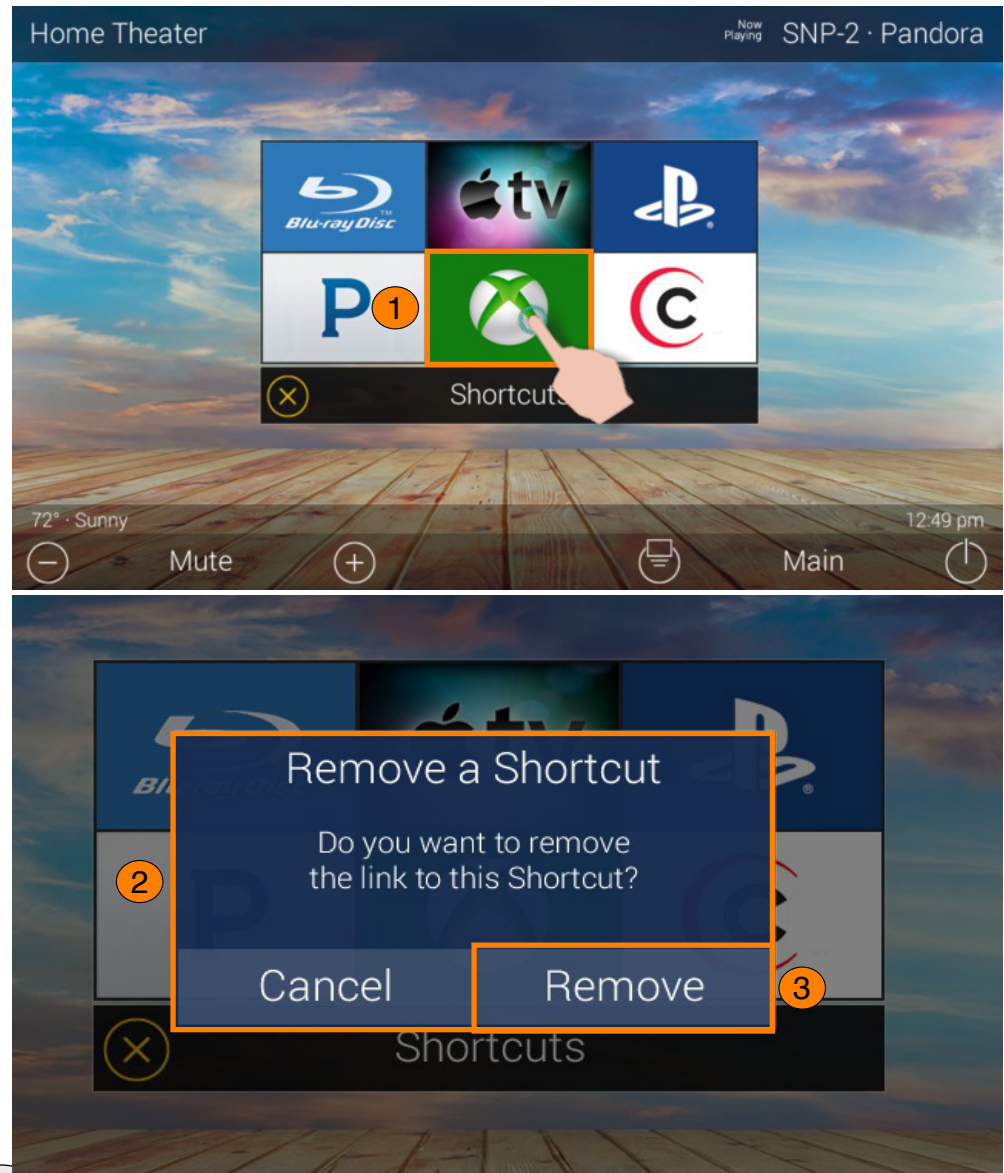

TOTAL CONTROL


Status Bar

Located above the Core Buttons, this section of the interface is almost always on display. The Status Bar is designed to inform the end-user of various customization options:

- A. Metadata Information:** Located to the far left, options selected from the programming software cycle through here. Those selections are the following:
- **Room Linked Status:** Whenever the chosen room/area is "linked" to other rooms, it is acknowledged in this section.
 - **Room Alarm Clock Status:** If the current room has an Alarm that is set to activate, the status bar displays an alarm clock icon and the next scheduled time/day.
 - **Vacation Mode Status:** When Vacation Mode is activated, the Status Bar displays "Vacation Mode On". When inactive, the Status Bar displays "Vacation Mode Off".
 - **Sunrise:** Updated at midnight every day, displays the sunrise time for the next day.
 - **Sunset:** Updated at midnight every day, displays the sunset time for the next day.
 - **RSS Weather Alert:** Based on the location entered by the system programmer, the words "Weather Alert" appear if an automatic alert is received via internet.
 - **DMS-AV Surround Mode Status:** Displays the current sound mode of the DMS-AV Surround Processor.



- B. Page Indicator:** The icons here represent the current page number the interface is on. However, the icon located to the left is the Scenes Menu icon. All icons to the right of that represent page numbers.
- C. Time:** This is always present on the right hand side of the interface. It serves as a quick and convenient place for the end-user to check the time of day.

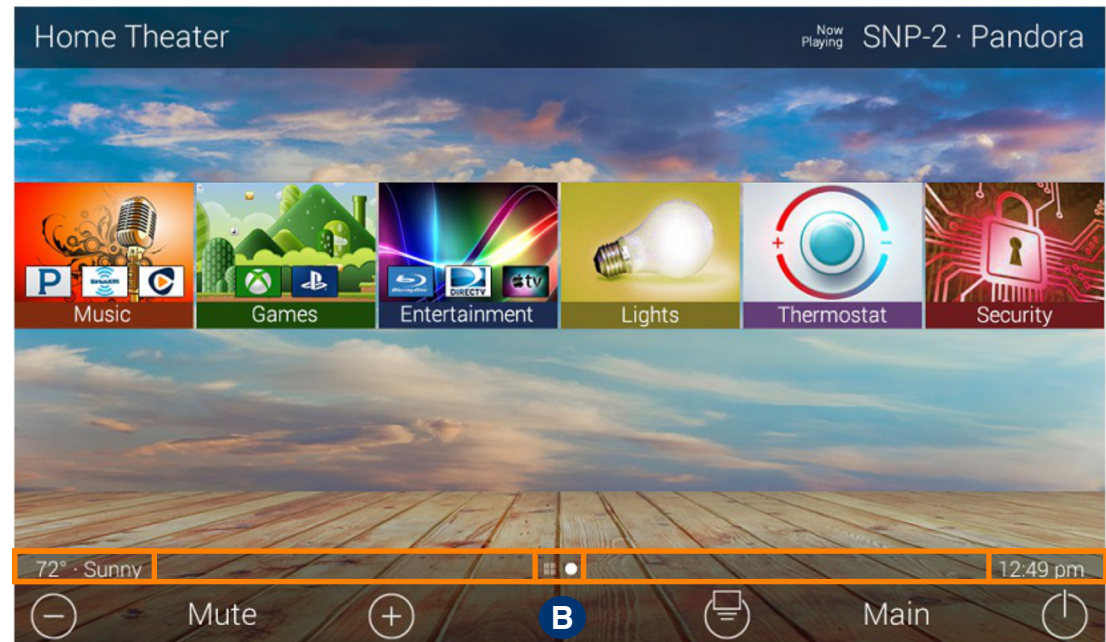

Intercom

The TKP-9600 has the capability of communicating across the home network to any Intercom-Enabled client (interface).


There are three (3) different types of intercom calls that can be made:

1. **Audio-Video:** This type of call uses the camera and microphone of the calling and receiving client to provide auditory and visual feedback.
2. **Audio Call:** This type of call only uses the built in microphone of the calling and receiving client to create an audio call over the home network.


1



2

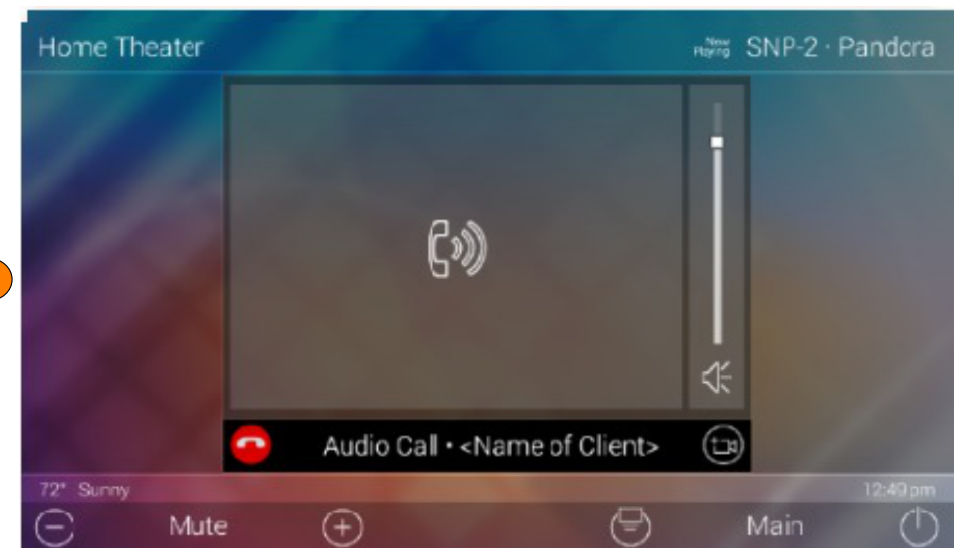

- 3. Audio Broadcast Call:** This type of call is audio communication between two or more clients. An ideal way to communicate across multiple Intercom-Enabled interfaces in almost any home.

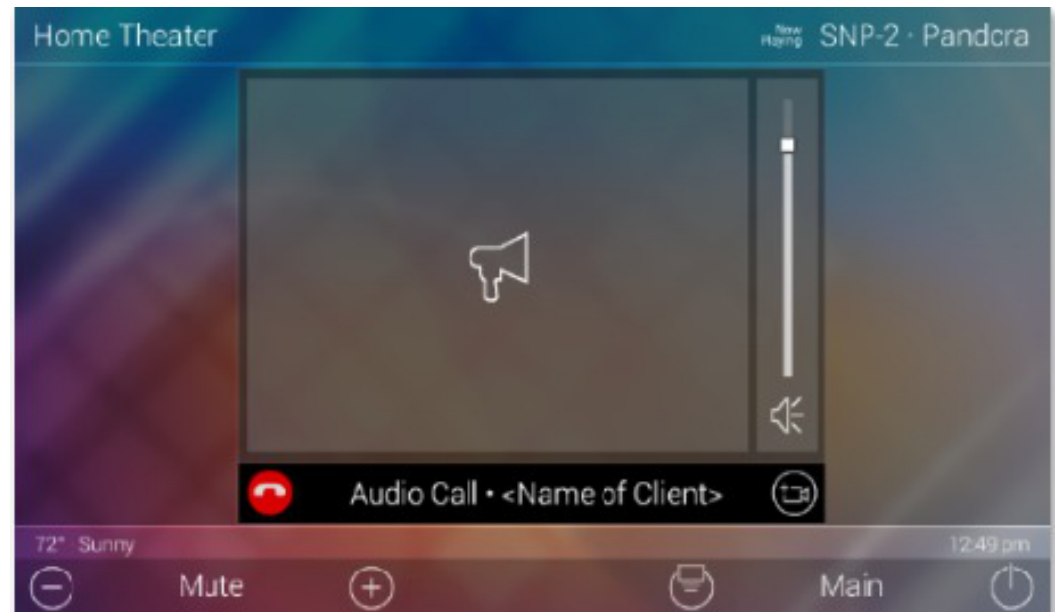

TOTAL CONTROL

Navigating the Intercom Menu

As mentioned on [page 6](#) of this document, accessing the Intercom button is performed by swiping down on the **Title Bar**.

After selecting the Intercom button from the Title Bar Menu, the Intercom Menu displays. This menu presents the end-user with useful information:

- **Door Station Integration:** In the case where a 3rd party door station has been integrated with the Total Control system, those device are located at the top of the Intercom Menu.
- **System Clients:** The Intercom Menu lists every Intercom-Enabled client in the system. There are three (3) possible status modes for each client:




Available: The client is ready to receive any type of call.




Not Available/Busy: Signifies the client is unable to receive a call.



Do Not Disturb: Signifies the client is currently in Do Not Disturb mode.

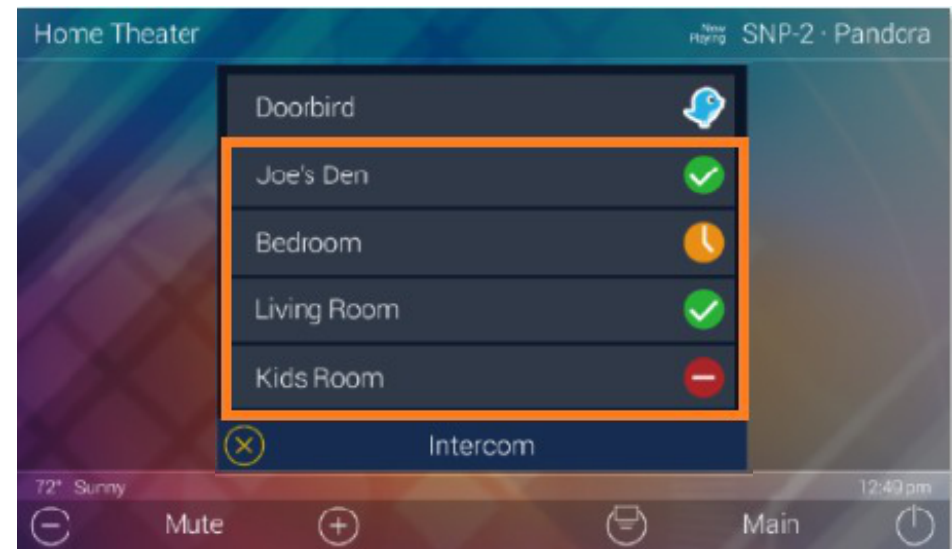

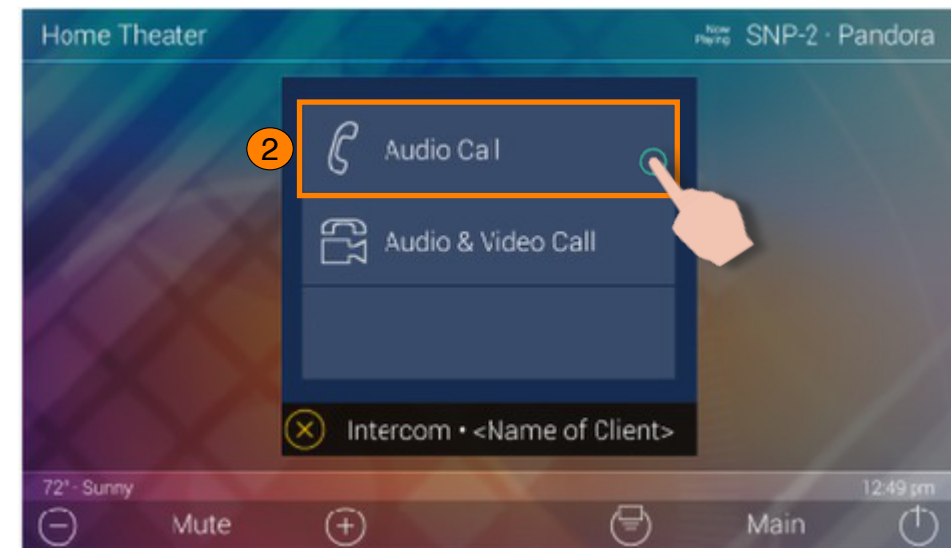

Making Calls: Audio-Video

Remember that the Intercom feature must be enabled from within the Settings Menu. The following steps take place from the Intercom Menu, to access this menu refer to [page 6](#):

1. Select an available client from the **Intercom Menu**.

After selecting a client, the three **(3)** call options are displayed. This is almost always displayed after selecting an available client.

2. Select **Audio & Video Call**.



Once the call is accepted, the TKP-9600 provides auditory and visual two-way feedback on the screen.

Use the **Volume Slider** at the right of the video feedback to raise or slower the volume. Slide the indicator to the top for maximum volume or slide it down to the bottom to mute the audio.

To end an **Audio & Video** call, select the **End Call** button (see image at right). This immediately ends the call and returns the TKP-9600 to the Intercom Menu.



TOTAL CONTROL

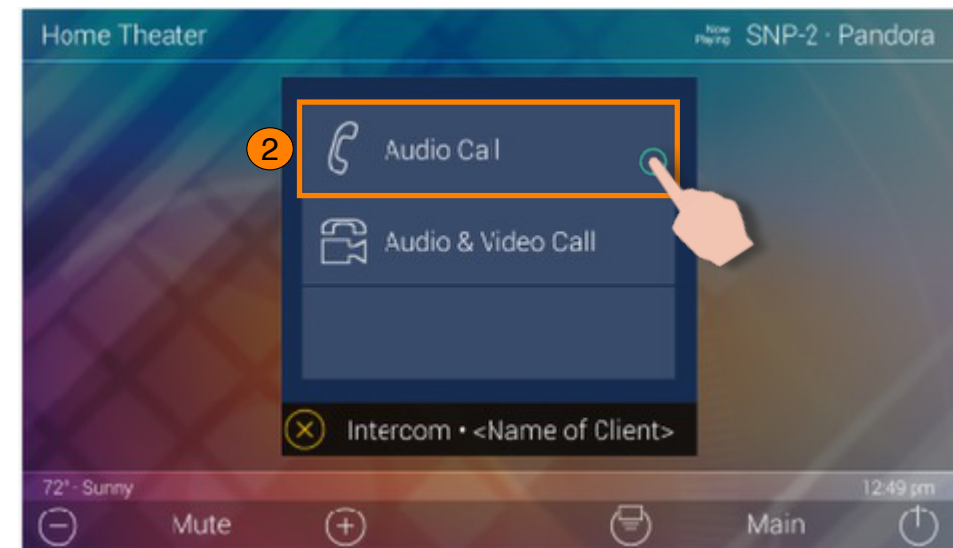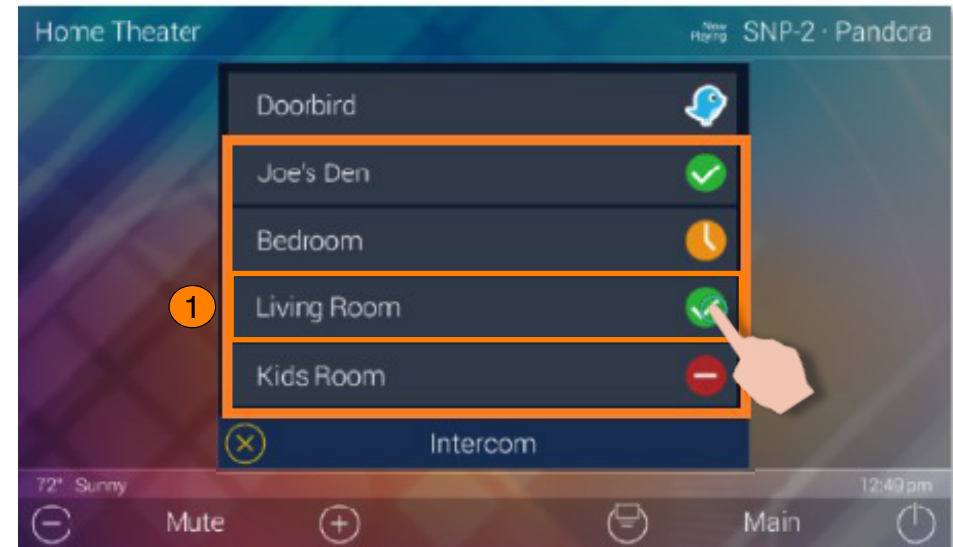

Making Calls: Audio Calls


Remember that the Intercom feature must be enabled from within the **Settings Menu**. The following steps take place from the **Intercom Menu**, to access this menu refer to [page 6](#):

1. Select an available client from the **Intercom Menu**. After selecting a client, the three **(3)** call options are displayed. This is almost always displayed after selecting an available client.
2. Select **Audio Call**.

Once the call is accepted, the TKP-9600 provides two-way communication between clients via audio only.

Use the **Volume Slider** at the right of the call icon area to raise or slower the volume. Slide the indicator to the top for maximum volume or slide it down to the bottom to mute the audio.

To end an **Audio Call**, select the **End Call** button (see image at right). This immediately ends the call and returns the TKP-9600 to the Intercom Menu.


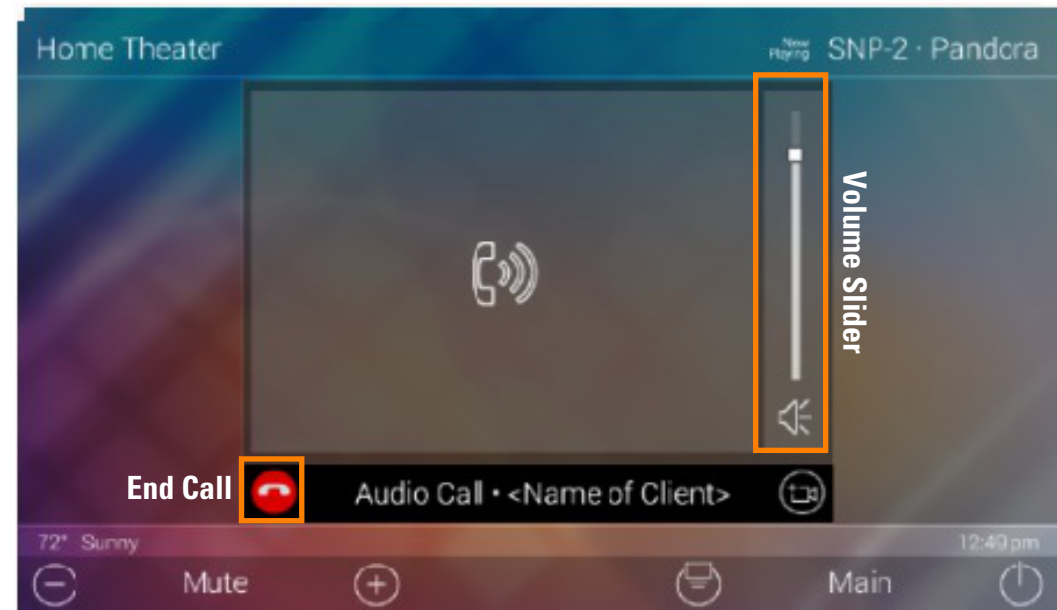


TOTAL CONTROL

Making Calls: Audio Broadcast

Remember that the Intercom feature must be enabled from within the **Settings Menu**. The following steps take place from the **Intercom Menu**, to access this menu refer to [page 6](#):


1. Select **Broadcast Call**. A list populates of all available Intercom-Enabled devices.
2. Check the boxes of the clients to include in the **Audio Broadcast**.
3. Select the **Confirmation** button.

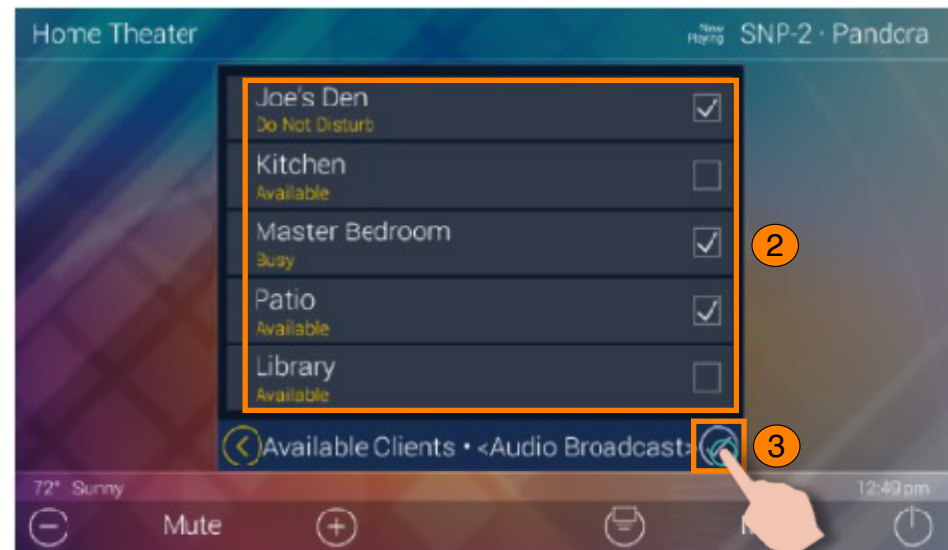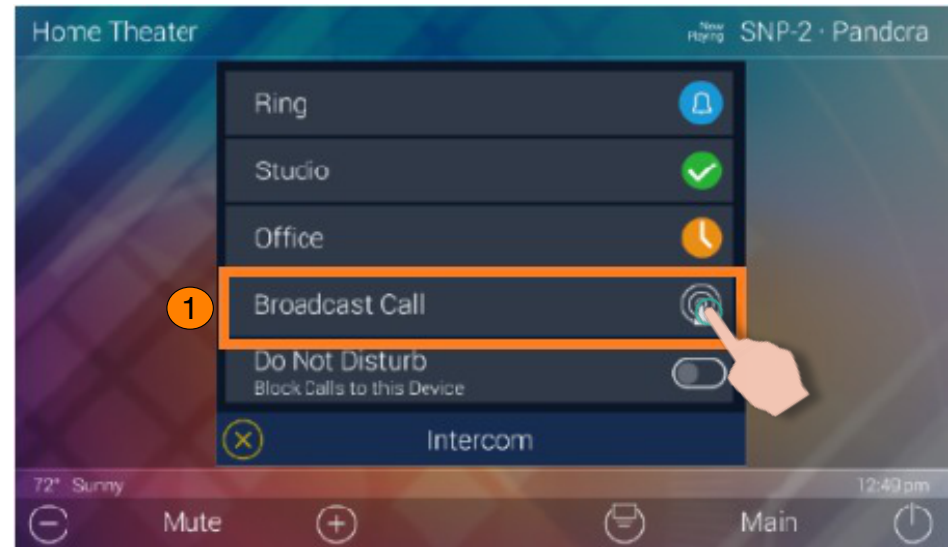

Once the call is established, all selected devices communicate via audio.

Use the **Volume Slider** at the right of the call icon area to raise or lower the volume. Slide the indicator to the top for maximum volume or slide it down to the bottom to mute the audio.

To end an **Audio Call**, select the **End Call** button (see image at right). This immediately ends the call and returns the TKP-9600 to the Intercom Menu.

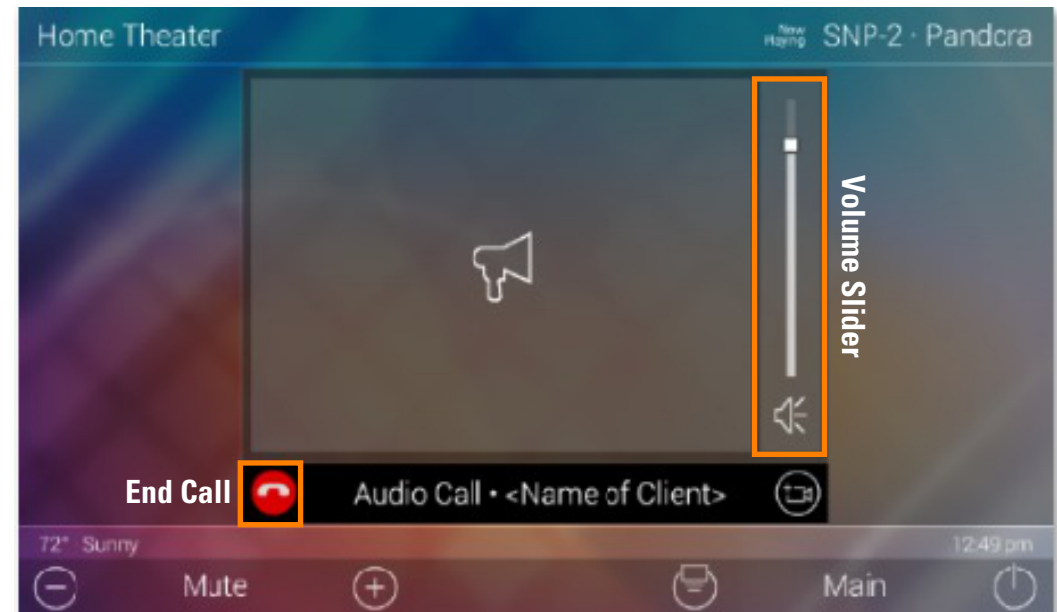

Do Not Disturb Mode

Enabling the **Do Not Disturb** feature sets the current TKP-9600 unavailable. This means that the keypad cannot receive any calls from other interfaces.

To enable this feature, use the **slider** located at the right of the text **Do Not Disturb**. These are the possible states:


Do Not Disturb: ON



Do Not Disturb: OFF



This button functions as a **toggle**. Select it once to enable and tap the slider again to disable **Do Not Disturb** Mode.

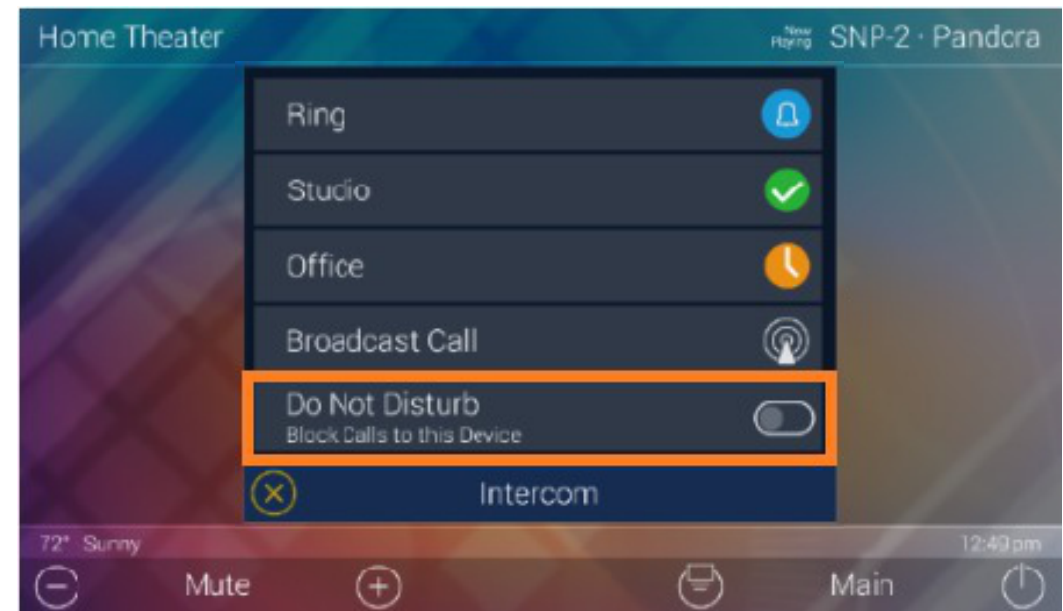

TOTAL CONTROL

Scenes Menu


The Scenes Menu is dictated by the system programmer. Access this menu by swiping to the right from the Main Menu.

The Scenes Menu can contain up to a hundred (100) Scenes (buttons) per room. Keep in mind that the Scene Menu is unique to each room.

Tap any button on the Scenes Menu to select a particular activity. Additionally the Scenes Menu can be set as the landing page when the Main button is selected.

Scenes can trigger any individual device or multiple devices to perform a particular activity. For example, selecting a Scene like Cleaning (see right), can turn off the television and turn on a music source.

Since each Scene must be programmed through the Accelerator software, be sure to speak with a custom home integrator for Scene idea and/or requests.

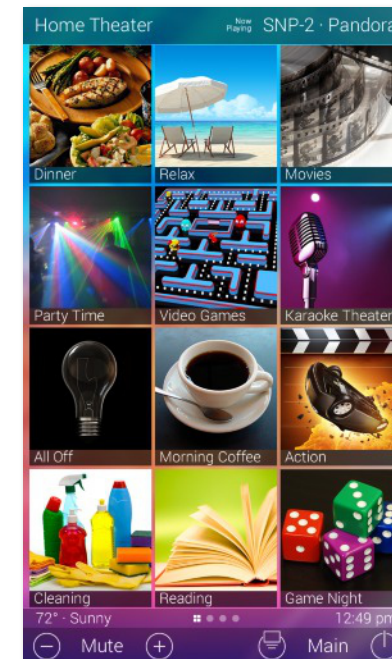

TOTAL CONTROL


Settings Menu

Access the Settings Menu by sliding the Title Bar and selecting the Settings button, refer to [page 6](#) for more details.

Most settings do **NOT** require interaction with the end-user. Changing some settings could cause issues with the Total Control system, only do so when instructed by **URC Technical Support**.

These are the available options:



- **Sleep Settings:** Manage when the LCD screen turns OFF.
- **General:** Contains all the general settings for the TKP-9600. Allows from the adjustment of Date, Time, and Temperature Scale.
- **Sound:** Adjust the volume of the audio feedback when pressing buttons on the interface.
- **Brightness:** Allows for the adjustment of the LCD screen's brightness.
- **Proximity Sensor:** Allows for the adjustment of the proximity level.
- **System:** Provides general information such as memory used, current version, and version details.
- **Network:** Allows for the setting of a Dynamic or Static IP address for the TKP-9600 and also gives general info about the network.
- **Intercom:** This is used to set up the Intercom of the TKP-9600.
- **Demo:** Used to create a simulation system that the TKP-9600 can use to show off interface features.
- **Factory Reset:** Allows the TKP-9600 to be reset to its factory state.

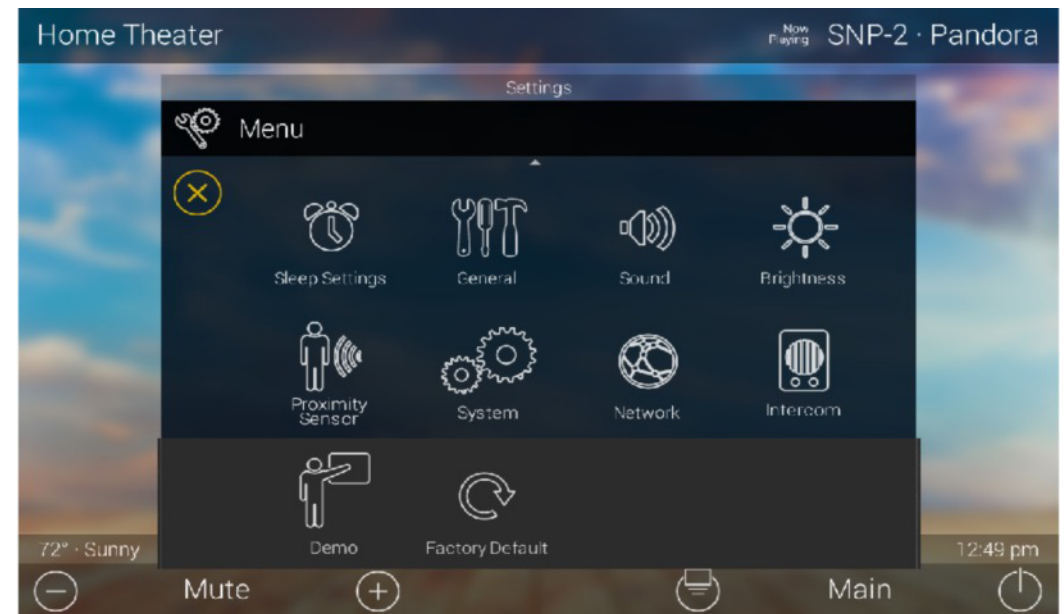

Sleep Settings

Below are the selectable choices available in this menu:

1. **LCD Screen is Always On:** When selected, the TKP-9600's display never turns off.
2. **LCD Screen will Turn Off:** When selected the Turn Off After section is selectable. Choose from a 20 second, 30 second, or one (1) minute time out.
3. **LCD Screen will Display a Night Mode:** When selected the Start After and Duration option become active.
 - **Start After:** The TKP-9600 times out based on the value entered here and goes into Night Mode.
 - **Turn Off After:** The TKP-9600 turns off Night Mode after the value entered here.

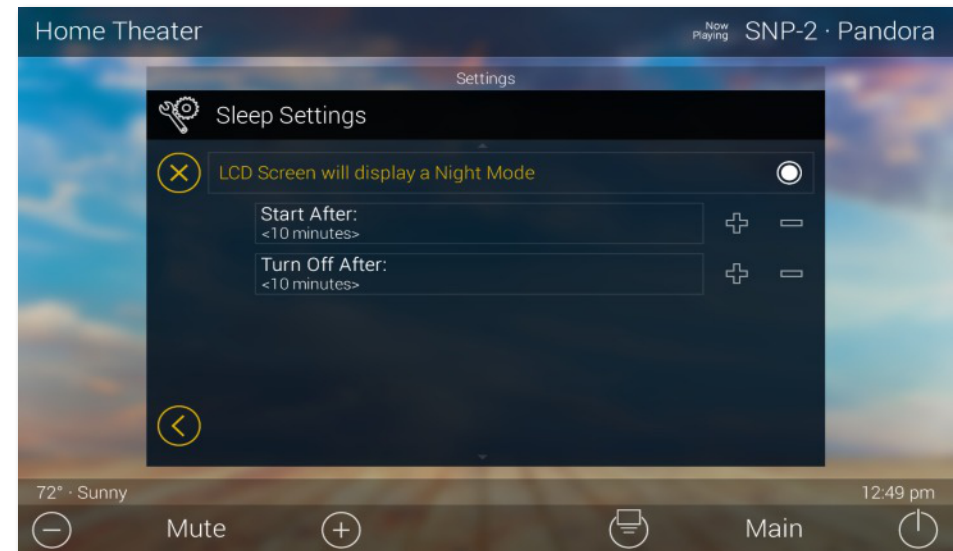
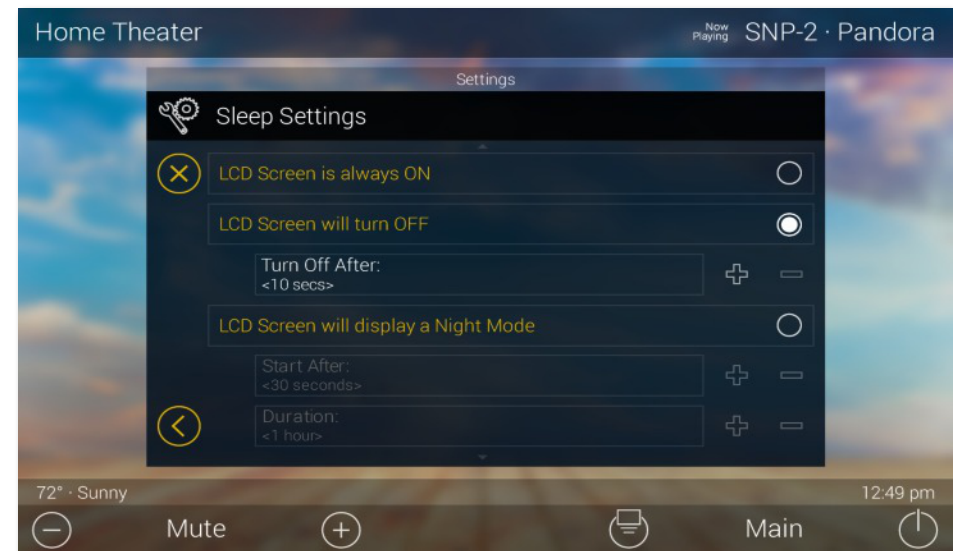


TOTAL CONTROL

General

Using the left and right arrow keys, enter the values of each category:

1. **Date:** The following can have its value changed:
 - **Month**
 - **Day**
 - **Year**
2. **Time:** The following can have its value changed:
 - **Hour**
 - **Minutes**
 - **Seconds**
 - **AM/PM**
 - **12 Hour/24 Hour**
3. **Automatically Adjust Clock for Daylight Savings:** Check this box to have the TKP-9600 automatically adjust for daylight savings.
4. **Temperature Scale:** Set this either to Fahrenheit or Celsius.

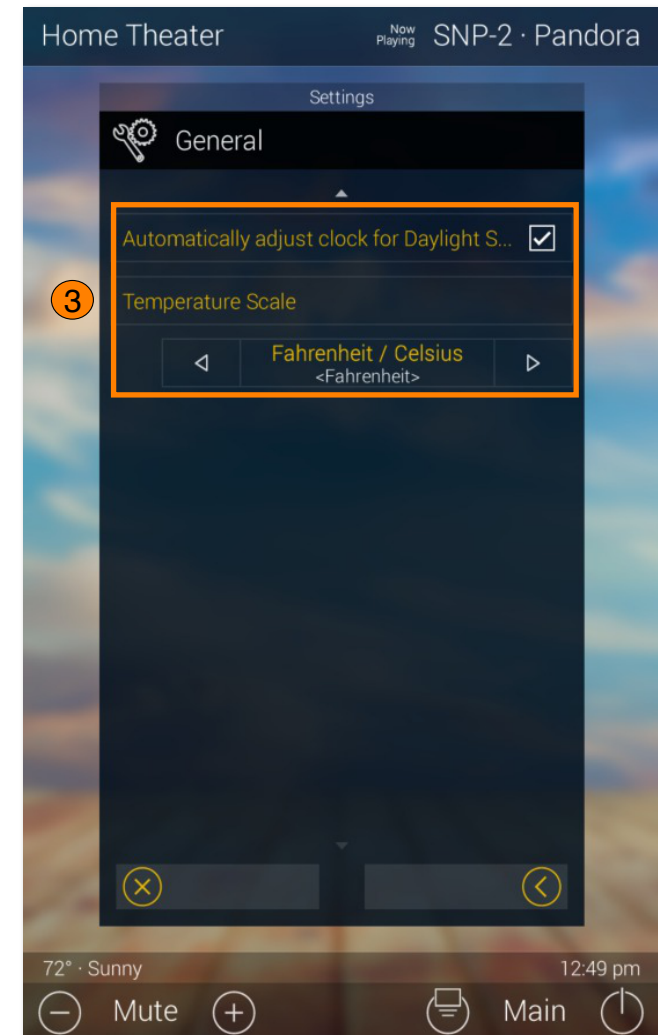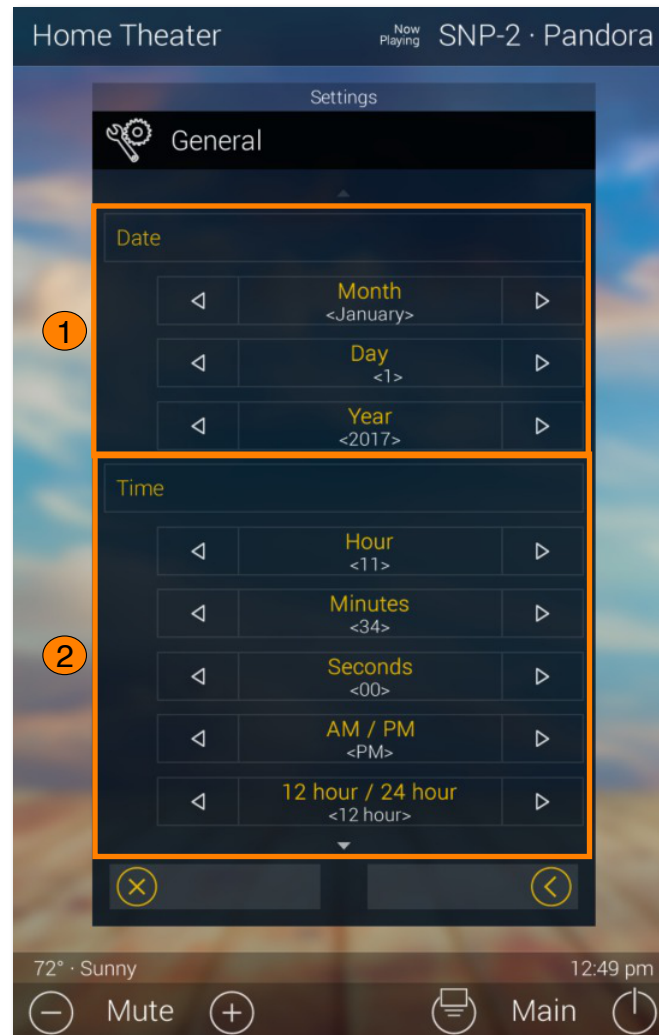

TOTAL CONTROL

Sound

Press the minus (-) button to lower the TKP-9600's audio output or press the plus (+) button to increase the volume.



Additionally, dragging the slider to the right increase the audio output while dragging it to the left decreases it.

Brightness

Press the minus (-) button to lower the TKP-9600's display brightness or press the plus (+) button to increase the brightness.

Additionally, dragging the slider to the right increase the display brightness while dragging it to the left decreases it.

- **Enable Light Sensor:** The TKP-9600 is equipped with an ambient light sensor that can automatically adjust the display brightness. Check the box to enable this feature.

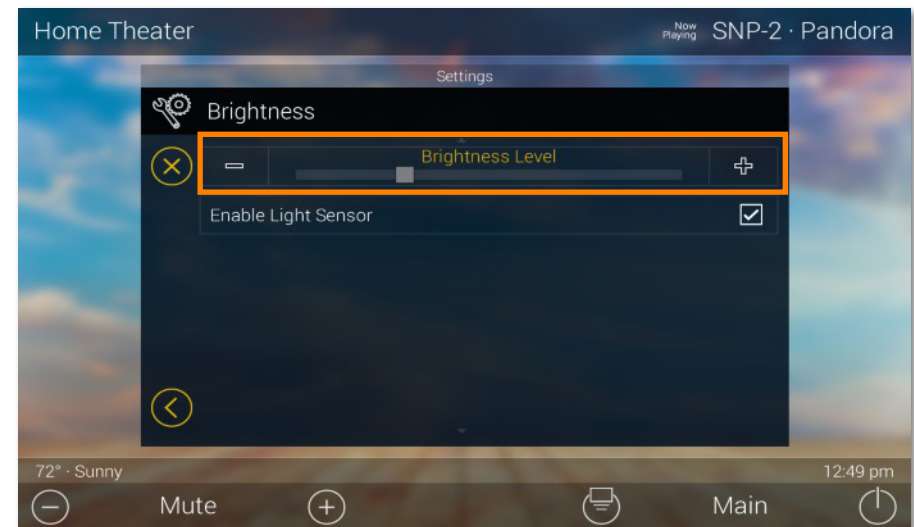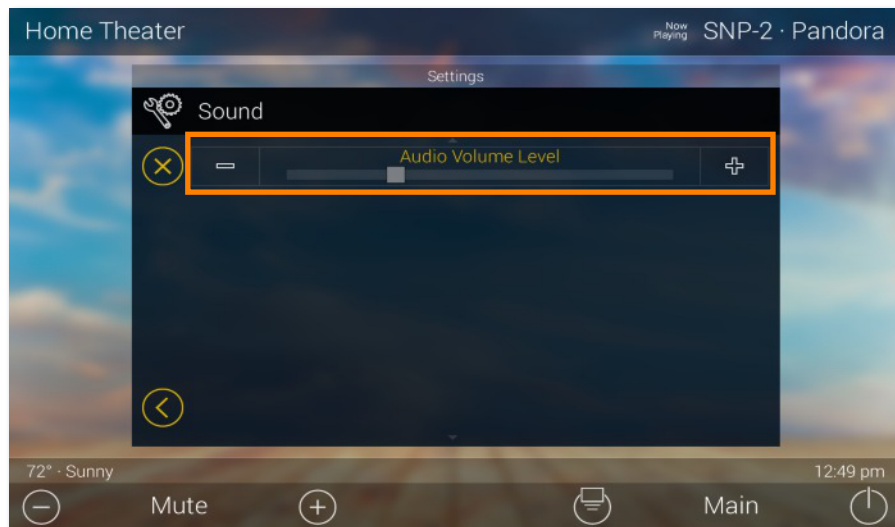


Proximity Sensor

Press the minus (-) button to lower the sensitivity on the TKP-9600's Proximity Sensor or press the plus (+) button to increase the sensitivity.

Additionally, dragging the slider to the right increases the sensitivity while dragging it to the left decreases it. The maximum distance of the proximity sensor is about three (3) feet.

- **Enable Proximity Sensor:** By default this check box is enabled. Uncheck the box to disable the proximity sensor.

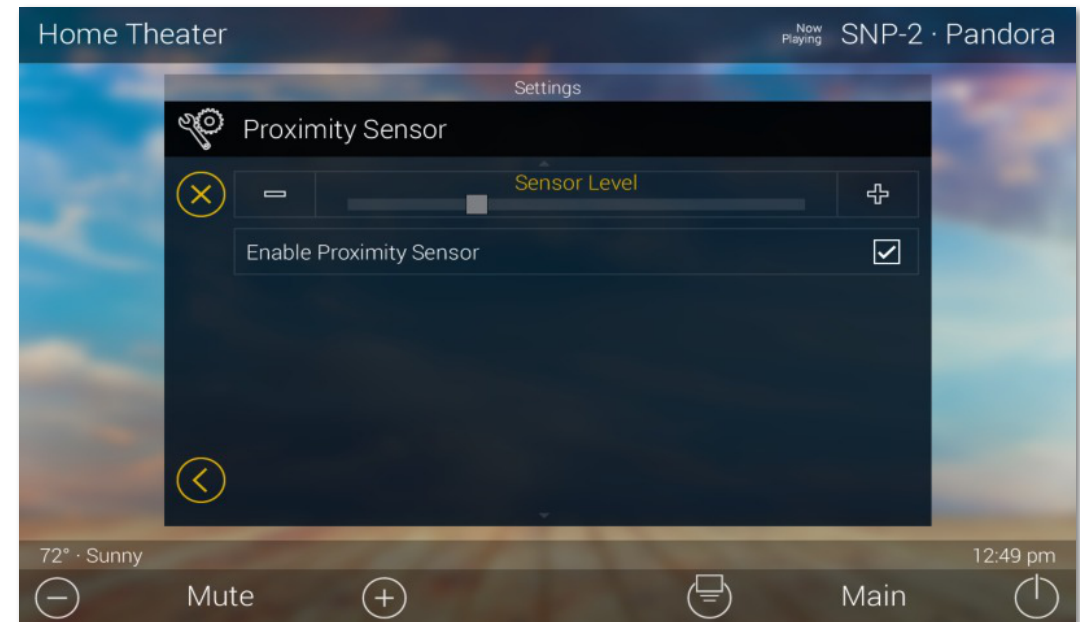

System Information

Although none of the information can be modified. These System Pages display important information about the TKP-9600.

These pages are only needed by a custom install professional or by URC Technical Support.



TOTAL CONTROL

Network

This option displays important information about the current network.


Caution, these settings should **ONLY** be changed by a professional. Entering values without specific instruction could easily result in the TKP-9600 failing to function correctly.

Here is the information that can be displayed here:

1. **Connection:** Displays the status of the network connection, connected or not connected.
2. **TCP/IP:** Displays information such as Address Type (DHCP or Static), IP Address, Subnet Mask, Gateway, and DNS.

Select the Edit button to reveal additional options.

- **For DHCP:** Select **Obtain an IP Address Automatically**.
- **For Static:** Select **Use the Following Address**. Fill out the required network settings.

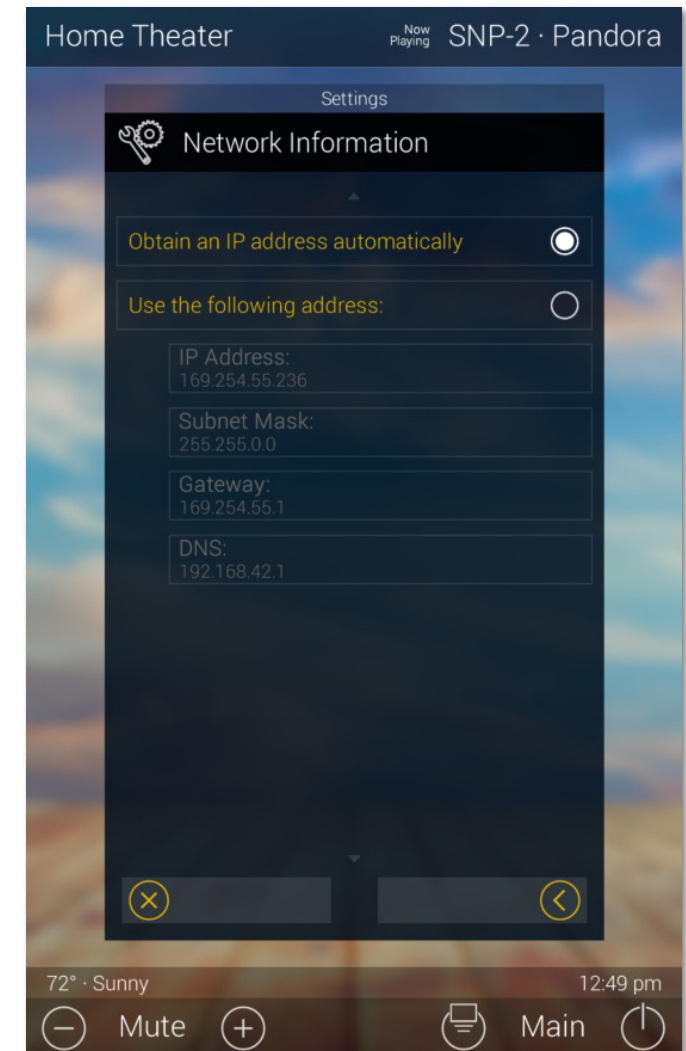

Intercom

The Audio-Video Intercom Settings menu is the location where the Intercom features must be enabled. By default this feature is disabled, it must be enabled in order for the TKP-9600 to communicate with other Intercom-Enabled devices.

- **Enable Intercom:** Enables the audio intercom function. Once enabled, the Intercom icon is displayed when dragging down the Title Bar as seen on [page 6](#).
- **Set Intercom Name:** The label entered here appears on the Intercom menu of Intercom-Enabled devices in the system.
- **Enable Intercom Video:** Enables the video intercom function.
- **Receive Door Station Calls:** If the system is integrating with a 3rd party door station (DoorBird), this feature must be enabled for the TKP-9600 to receive door station calls.
- **Set Intercom Notification Sound:** Allows the user to select a different tone for intercom calls.




Factory Default

This should only be attempted by a **custom install professional** that is familiar with Total Control or under instruction from **URC Technical Support**.

Selecting this option resets the TKP-9600 to its factory state and does not function until the device is reprogrammed by a custom install professional.

1. Press and hold the **Factory Reset button** for over **five (5)** seconds.
2. Select **Yes**.

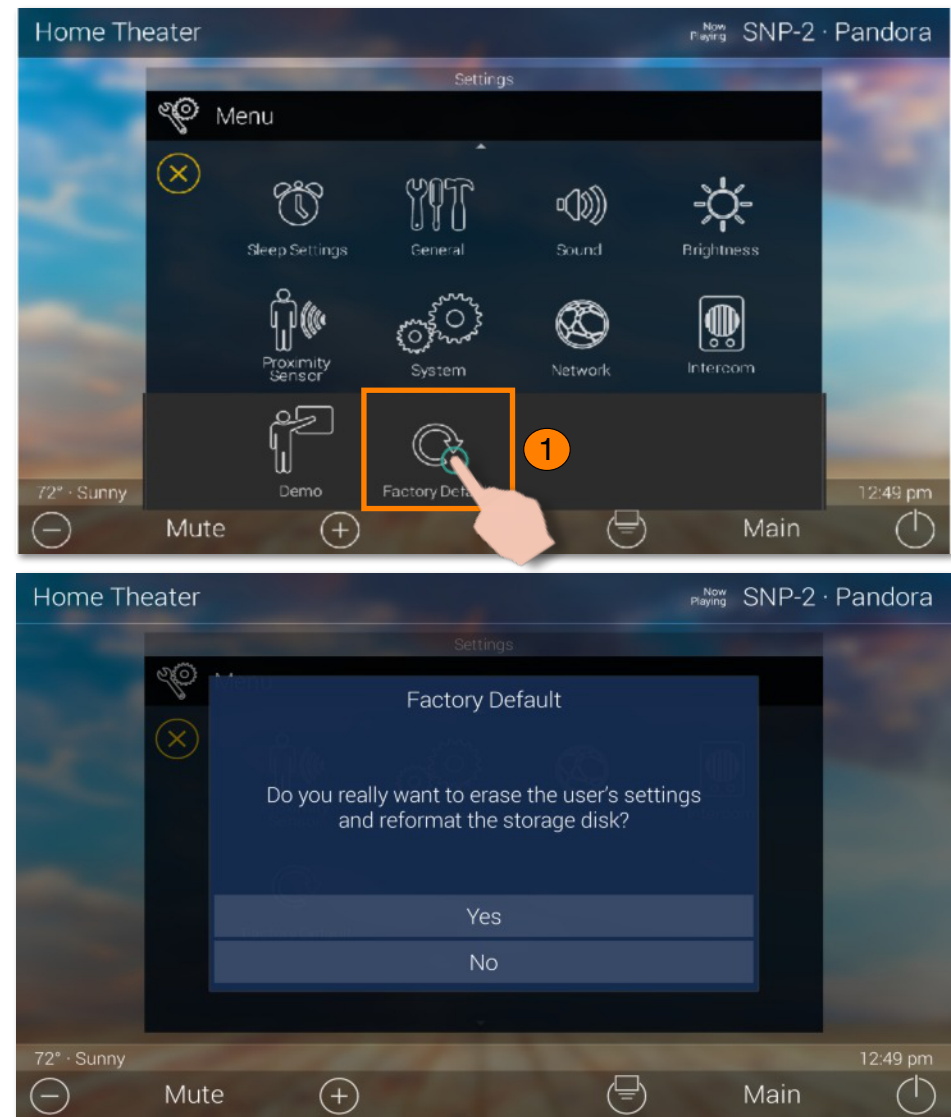

TOTAL CONTROL

Specifications

These are the technical specifications for the TKP-9600:

Microprocessor: Cortex-A9 QuadPlus 1Ghz

Memory: 8GB eMMC, 2GB RAM

Devices: Supports up to 255 devices

Pages: Supports up to 255 pages on each device

Macro Capability: Up to 255 steps

Network: One 10/100/1000 Ethernet Port (PoE+)

LCD: 10 Inch (1280 x 800)

Weight: 24.7 oz

Size: 10" x 7" x 1.03"

Power: Standard PoE Injector or PoE Switch (purchased separately)



Limited Warranty Statement

<https://www.urc-automation.com/legal/warranty-statement/>


End User Agreement

The terms and conditions of the End User Agreement available at <https://www.urc-automation.com/legal/end-user-agreement/> shall apply.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


Page: 1 / 25

TEST REPORT

Order Number	: GETEC-C1-18-270
Test Report Number	: GETEC-E2-18-044
Type of Equipment	: Network Keypad
Model Name	: TKP-9600
Applicant	: OHSUNG Electronics Co., Ltd.
Applicant Address	: #181 Gongdan-dong, Gumi-si, Gyeongbuk, Republic of Korea.
Serial Number	: Prototype
Date of Incoming	: May 24, 2018
Date of Issue	: Jul. 27, 2018

SUMMARY

This device has been verified to comply with the requirement of following regulation.

<ul style="list-style-type: none"> - EN 55032(2015) - AS/NZS CISPR 32 (2015) - EN 61000-3-2 (2014) - EN 61000-3-3 (2013) 	<ul style="list-style-type: none"> - EN 55024 (2010)+A1(2015) - EN 50491-5-1 (2010) - EN 50491-5-2 (2010)
--------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------

This test report only contains the result of a specific sample supplied for the examination.
It is not a generally valid assessment of the features of the respective products of the mass-production.

This test report consists of 25 pages.
It is not allowed to copy this report even partly without the approval of EMC center.

This test report should not be used to claim quality endorsement by KOLAS.
The test results in this report are traceable to the national or intentional standard.


Tested by: Soon Hoon

Soon Hoon Jeong / Senior Engineer
GUMI UNIVERSITY EMC CENTER

Approved by: [Signature]

Hyung-Seop Kim / Technical Manager
GUMI UNIVERSITY EMC CENTER

GETEC-QP-28-005 (Rev.03)
EMC CENTER



Warning!

The manufacturer is not responsible for any Radio or TV interference caused by unauthorized modifications to this equipment.

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Regulatory Information to the User

- CE conformity Notice Products with "CE" marking comply EMC Directive 2014/30/EU issued by the commission of the European Community.

1. EMC Directive

- Emission
- Immunity
- Power

- Declaration of Conformity

"Hereby, Universal Remote Control Inc. declares that this TKP-9600 is in compliance with the Essential requirements."