



AR400741
200 series blower
Metal housing
665 CFM
Inside installation
Air extraction

Maximum output for downdraft ventilation and motorless hoods
Installation in a separate room allows lower noise level in the kitchen
To be combined with motorless hoods or downdrafts

Output

Performance output level 3/4:
Air output according to EN 61591.
Sound power and sound pressure depending on built-in situation.
For the characteristics of each output level with/without intensive mode please refer to the table with the respective motorless ventilation products.

Features

Metal housing, zinc-plated.
Pipe connections air intake: 1 x ø 8" round duct, 4 x ø 6" duct.
Pipe connection pressure side: 1 x ø 8" round duct.
Spare cover to close an air intake included with the blower.

Planning notes

When installing a ventilation hood with air extraction mode and a chimney-vented fireplace, the hood's power supply line needs a suitable safety switch.
Installation in the drawer area with double height or on the floor with cut-out in the furniture base. Air intake with flat duct max. 2x DN 150 behind the drawers requires worktop depth of min. 27 1/2". Cabinets without plinth possible.
Unobstructed air flow: maximum air output 590 CFM with ø 8"
For details of the remote fan unit's effective air output in combination with a hood or downdraft, refer to the table section.

Rating

Fan output 730 W.
Connecting cable 41 1/3"

Product Features




Product Description
Product group
Accessory
Brand
Gaggenau
Product name / series name
SKU
AR400741
Internal article number
AR400741
EAN code
4242006261214
Product packaging dimensions (HxWxD) (in)
Net weight (lbs)
33
Gross weight (lbs)
37
Quantity per packing unit
Standard number of units per pallet
8
UPC code
825225922155
Name of product image
MCSA043417_AR400130_def.jpg

2017-08-31

Page 1

GAGGENAU

AR400741
200 series blower
Metal housing
665 CFM
Inside installation
Air extraction
2017-08-31
Page 2

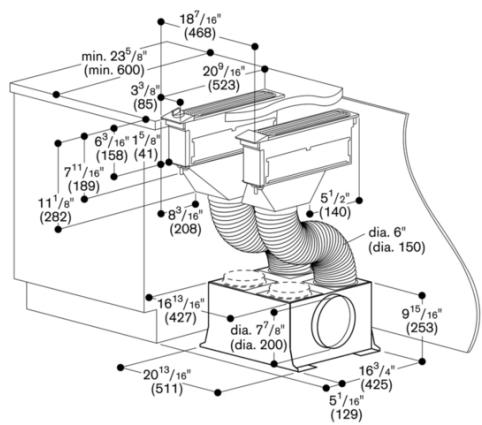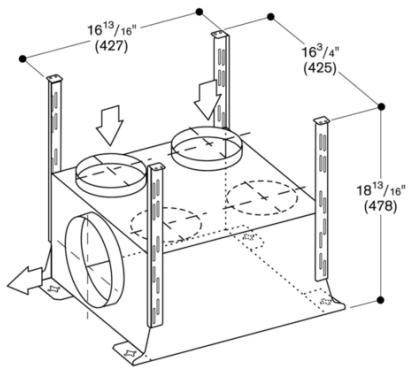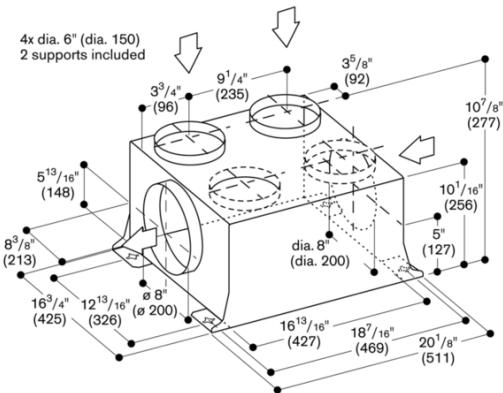

GAGGENAU