


## PLATINUM SMART-HEAT™ GAS

Top quality performance and the looks to match

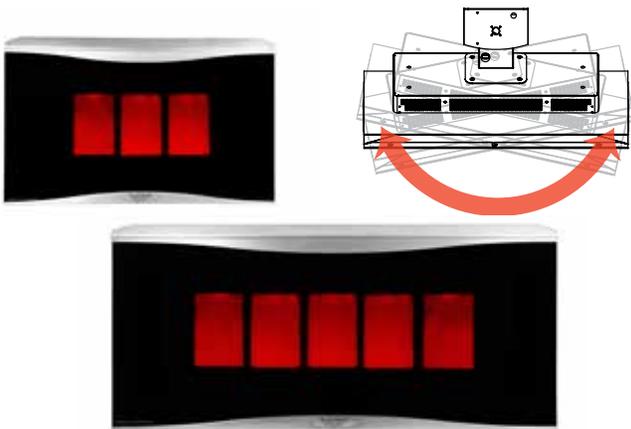

Brushed stainless steel and a ceramic medium makes Platinum Smart-Heat™ Gas suitable for the most exclusive outdoor environments.

Tinted ceramic transforms an otherwise obtrusive red glare emitted by traditional tiles into a soft glow, enhancing the overall experience and ensuring even heat distribution.


Directional ceiling or wall mounts provides greater positioning versatility and heat coverage.



# PLATINUM SMART-HEAT™ GAS





## FEATURES:

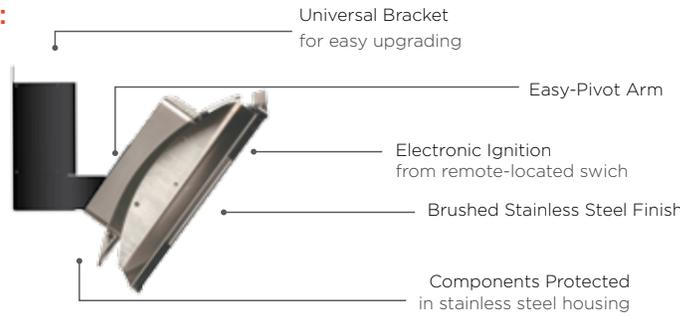


## HEAT DISTRIBUTION:

\*Heat area dependent on ambient temperature and wind. Optimum conditions experienced at approx 15.5°C/ 60°F & in a low wind covered environment. Table layout indicative only.

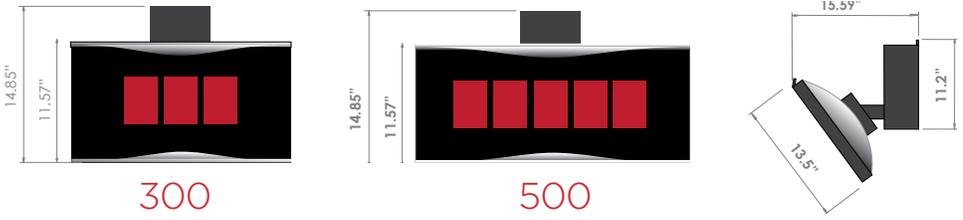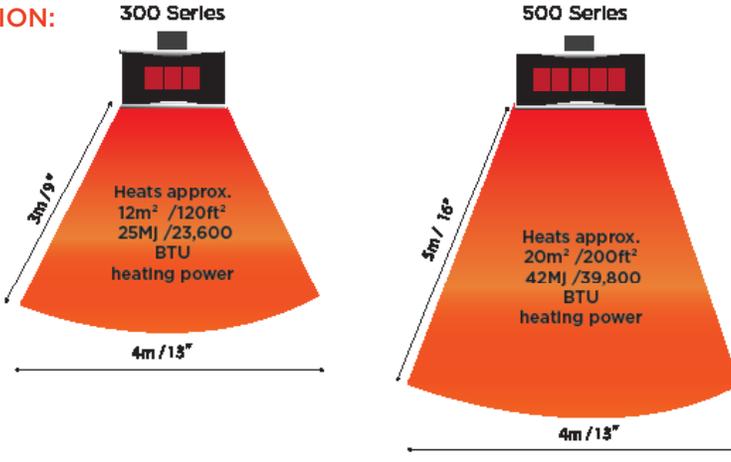

## ACCESSORIES\*

- Ceiling poles (black electro plated):
  - \*The dual-directional ceiling mount pole offers greater positioning versatility in larger open areas.
  - › Dual or single heater mounting
  - › 5 lengths to suit ceiling heights of 10.5', 11.2', 11.8', 12.5' and 13'
  - › Adjustable mounting bracket to suit most installations

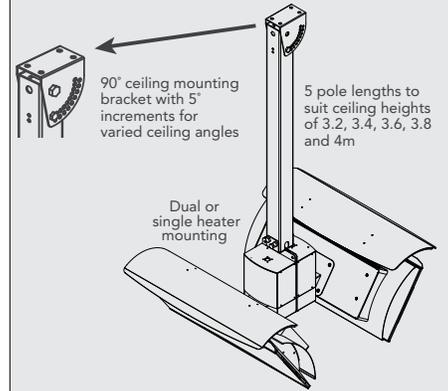

\*All accessories sold separately


## SPECIFICATIONS

Model	300		500	
Part no.	LPG <sup>1</sup>	BH0110002	BH0110004	
	Natural Gas <sup>1</sup>	BH0110001	BH0110003	
Heat Deflector part no.	BH3030001		BH3030002	
Ceiling Poles	5 pole lengths to suit ceiling heights of 10.5', 11.2', 11.8', 12.5' and 13' (contact Bromic Heating for more information)			
Heat Output (on LPG and NG)	23,600BTU		39,800BTU	
Approximate area heated (feet <sup>2</sup> )	120ft <sup>2</sup>		200ft <sup>2</sup>	
Gas connection	1/2" NPT Female		1/2" NPT Female	
Electrical connection	110 Volt, 3-pin insulated plug		110 Volt, 3-pin insulated plug	
Dimension (WxDxH)	22.05" x 15.59" x 14.85"		29.76" x 15.59" x 14.85"	
Min. distance to combustible materials (without heat deflector) <sup>2</sup>	Sides: 3.6' / 1100mm			
	Above (to ceiling): 3'6" / 1100mm			
	(with heat deflector) <sup>2</sup> Above (to ceiling): 1'2" / 350mm			
Mounting height requirement to ground <sup>3</sup>	8' / 2438mm			
Weight (lb)	33lb		40lb	

<sup>1</sup>Must only be installed by a licensed technician. Must complete "Pre-Installation Checklist" before installing  
<sup>2</sup>The temperature will not exceed 65°C/149°F above the ambient temperature at specified distance. Please consult material manufacturer for temperature ratings and suitability. Bromic Heating takes no responsibility for material compliance. <sup>3</sup>8' / 2438mm or maybe lower depending on local regulations



## MINIMUM INSTALLATION CLEARANCES

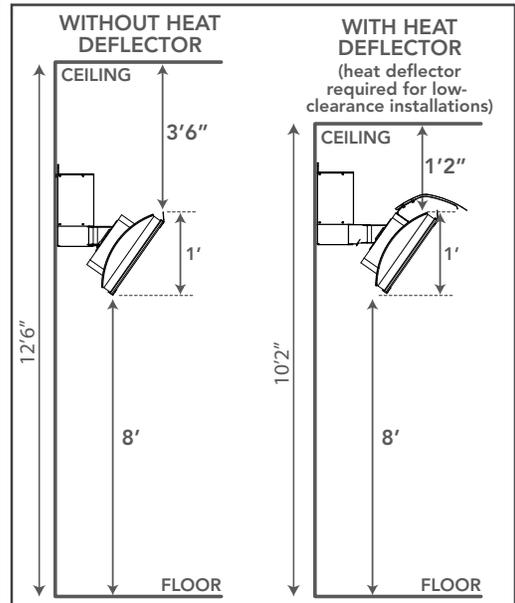

**BROMICHEATING.COM**

SMART-HEATING

HEAD OFFICE: 1 Suttor Street, Silverwater, Sydney NSW 2128 Australia NORTH AMERICA POSTAL: 13223 Black Mountain Rd Suite 1305 San Diego, CA. 92129  
 T: 1 800 301 1293 (within America) F: (858) 346-1388 E: info@bromicheating.com W: www.bromicheating.com

Last reviewed: August 14th 2014 (US)