


## WALL MOUNT RANGE HOOD SPECIFICATIONS


### **CWEH9-136**

Halogen lights. WL-1 warming lights are available on selected models. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes.

### **Dimensional Information**


| Width         | 36.0  |
|---------------|-------|
| Depth         | 21.0  |
| Height        | 9.0   |
| CFM @ 0.0" SP | 300.0 |
| Sones         | 5.4   |
| Amps          | 2.5   |
| # Lights      | 2.0   |



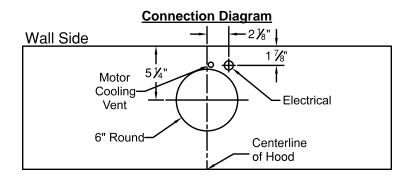

300 CFM B100 Single Blower (Top View)

# Recommended Mounting Height\*

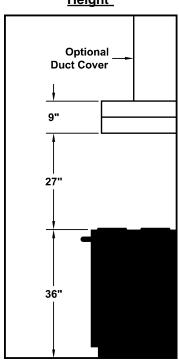

\*Exceeding recommended mounting height may compromise performance.

#### **Electrical/Mechanical Specifications For Blower Unit**

| Model       | Volts | Amps* | Hz   | RPM    | CFM<br>SP@0.0" | Equivalent CFM | CFM<br>SP@0.1" | CFM<br>SP@0.2" | CFM<br>SP@0.3" | Minimum Round Duct Size | Sones# |
|-------------|-------|-------|------|--------|----------------|----------------|----------------|----------------|----------------|-------------------------|--------|
| B100 Single | 115.0 | 1.5   | 60.0 | 1550.0 | 300.0          | 450.0          | 273.0          | 245.0          | 225.0          | 6" (28 sq. in.)         | 5.4    |

<sup>+</sup>This model is equipped with halogen lighting: (2 lights: 30" - 41", 3 lights: 42" - 53", 4 lights: 54" - 66").



<sup>\$</sup> Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

<sup>#</sup> Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.