


## **EURO-STYLE ISLAND RANGE HOOD SPECIFICATIONS**

### **EPITH18-448**


Halogen lights. This model is not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes.

## **Dimensional Information**


| Width         | 48.0   |
|---------------|--------|
| Depth         | 30.0   |
| Height        | 18.0   |
| CFM @ 0.0" SP | 1100.0 |
| Sones         | 6.4    |
| Amps          | 7.8    |
| # Lights      | 4.0    |

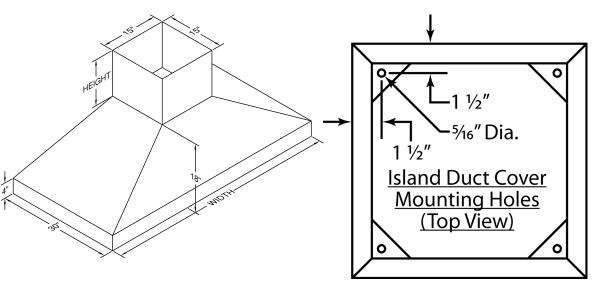

## **Connection Diagram**




1100 CFM T400 Cluster Blower (Top View)

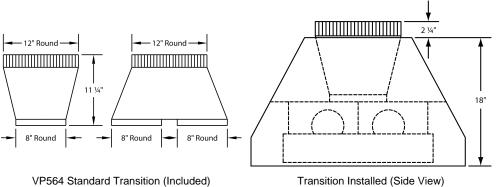

VP564 Standard Transition (Included)

# Recommended Mounting Height\*

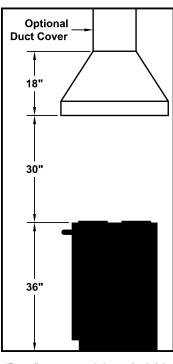

\*Exceeding recommended mounting height may compromise performance.

### **Electrical/Mechanical Specifications For Blower Unit**

| Model               | Volts | Amps* | Hz   | RPM    | CFM<br>SP@0.0" | Equivalent CFM | CFM<br>SP@0.1" | CFM<br>SP@0.2" | CFM<br>SP@0.3" | Minimum Round Duct Size | Sones# |
|---------------------|-------|-------|------|--------|----------------|----------------|----------------|----------------|----------------|-------------------------|--------|
| T400 Island Cluster | 115.0 | 5.8   | 60.0 | 1550.0 | 1100.0         | 1800.0         | 998.0          | 855.0          | 774.0          | 12" (113 sq. in.)       | 6.4    |

<sup>+</sup> This model is equipped with halogen lighting (one in each corner).



<sup>\$</sup> Because the Magic Lung® blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Magic Lung® blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Magic Lung® with other blower units made by other manufacturers, use the "Equivalent CFM".

<sup>#</sup> Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.