pureWash Pro
BY GREENTECH

Quick Start Guide

1. Remove from package.

Hold on to your packaging for now in case you experience any issues.

2. Remove Moisture Tab from Desiccant Dryer Cartridge.

Remove the Desiccant Dryer Cartridge from its holder and peel away the Moisture Blocking Tab before using pureWash. Replace the cartridge.

3. Determine Mounting Location.

Tape the Mounting Template to your wall where you will place your pureWash. This diagram shows the minimum space required around the mounting bracket.

*View from Front



4. Install Mounting Bracket.

Use the included screws for mounting to wood. If you have drywall, use the included screws and anchors.

5. Set Flow Rate.

Before placing pureWash on the wall, select your washing machine type on the rear of the unit. Use a coin or flat-head screwdriver.

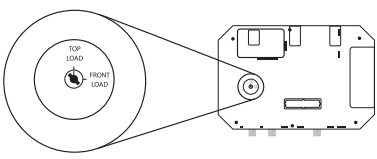

6. Place Unit on Mounting Bracket.

Carefully slide the unit onto the Mounting Bracket, ensuring proper seating on the bracket before continuing.

7. Turn Cold Water Faucet Off.

The Cold Water Faucet is usually located on the wall behind the washing machine, with a blue handle.

8. Move Existing Cold Water Hose.

Remove the end connected to the Cold Water Faucet on your Washing machine and connect it to pureWash where it says “To Washing Machine”

9. Connect Supplied Cold Water Hose.

Connect one end to the Cold Water Faucet and the other to pureWash where it says “Cold Water In”.

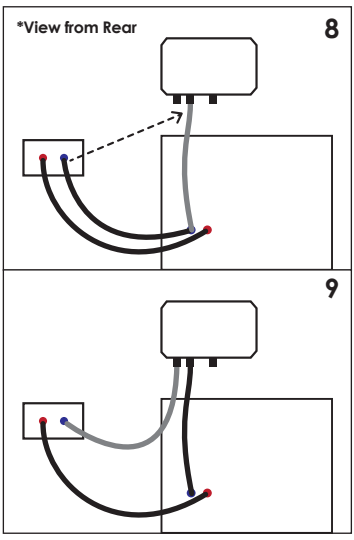

10. Plug in and Connect AC Adapter.

Plug the adapter into the nearest outlet and then connect to pureWash. Use any gauge extension cord, if necessary.

11. Enjoy Your pureWash!

After several loads of laundry, the residual detergent in your washing machine will be cleaned away. Spot treat stains as you normally would.

If you find that more in-depth instructions would be helpful, please consult your Owner’s Manual.