

# FAIRFOX WOOD SWIVEL STOOL

Model #4650-826 Counter Stool Model #4650-830 Barstool

**HARDWARE** 

PART

QTY


Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. The product of Hillsdale Furniture, LLC is designed for residential use only. Customer Service Phone Number: 502-562-0000


PART

QTY

#### HARDWARE LIST

- A (14) M6 x 40mm Long Allen Bolts

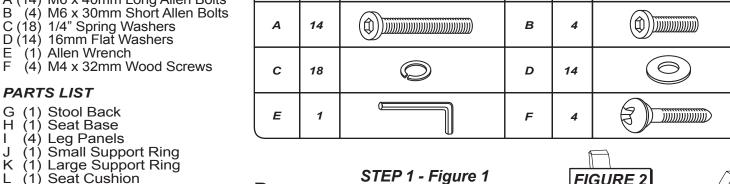



Begin the assembly by

attaching the Seat Base (H) to the Stool Back (G). Once in place, secure each end of the Stool Back (G) using 2 Long Allen Bolts (A) 2 Spring Washers (C) & 2 Flat

Washers (D) per side. Then secure from the middle with 2 Long Allen Bolts (A) 2 Spring Washers (C) & 2 Flat Washers (D).

Tighten all bolts using Allen Wrench (E).

STEP 2 - Figure 2

Attach each Leg (I) to the Large Support Ring (K) by using 1 Long Allen Bolt (A) & 1 Spring Washer (C) per leg. Do not fully tighten bolts.

#### STEP 3 - Figure 2

FIGURE 1


Slowly insert the assembled leg base into Small Support Ring (J) in place by using 1 Long Allen Bolt (A), 1 Spring Washer (C) & 1 Flat Washer (D) per leg. Tighten all bolts using Allen Wrench (E).

## STEP 4 - Figure 2

Next attach the Seat Base (H) to the pre-assembled Swivel Metal Plate using 4 short Allen Bolts (B), 4 Spring Washers (C) & 4 Flat Washers (D) to secure in place from the bottom. Tighten all bolts. The assembly is now complete.

## STEP 5 - Figure 2

Last attach the Seat Cushion (L) to the Seat Base (H) by securing using 1 Wood Screw (F) per hole. Tighten all screws only using a philips head screwdriver (not included). The assembly is now complete.

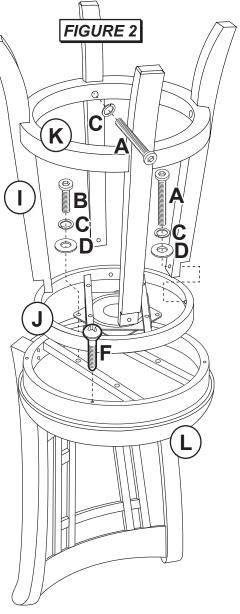

Date: 04-25-2014 Page 1 of 1

**HARDWARE**