


# CWRT67

**KICKER**  
POWER METER

## RECOMMENDED AMP RMS POWER

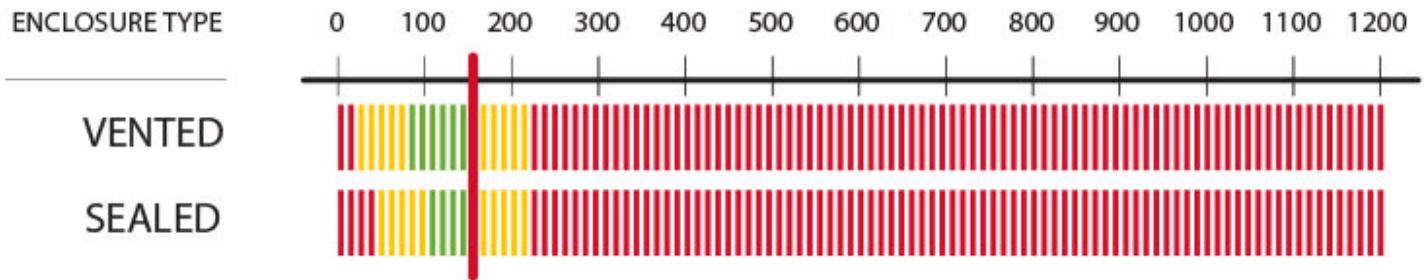

## Specifications

### Thiele/Small Parameters



**43CWRT671** T/S Parameters PDF

(/app/products/caraudio/subs/comprt16/p43cwrt671/files/43CWRT671.pdf)

### SIZE [in, cm]:

6-13/16, 17.3

### IMPEDANCE [Ohms]:

1 DVC

### Recommended Amplifier Power (watts RMS)

150

### Peak Power (watts, per ANSI/CTA-2031-A)

300

### SENSITIVITY [dB 1w/1m]:

82.6

### MOUNTING DEPTH [in, cm]:

2-3/4, 7

### MOUNTING DIAMETER [in, cm]:

5-5/8, 14.3

### MIN SEALED BOX VOL [cu. ft, L]:

0.18, 5.1

### MAX SEALED BOX VOL [cu. ft, L]:

0.75, 21.24

### MIN VENTED BOX VOL [cu. ft, L]:

-

**MAX VENTED BOX VOL [cu. ft, L]:**

-

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

**You may also like these related products\*****47KEY5001**

Key 500.1 Smart Sub Amp/Processor

(key-5001-1-channel-smart-amplifier)