
**CWC10** 



# RECOMMENDED AMP RMS POWER

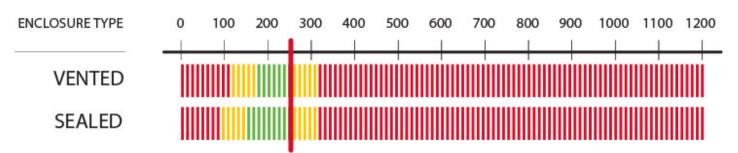

## **Specifications**

#### Thiele/Small Parameters



44CWCS104 T/S Parameters PDF

(/app/products/caraudio/subs/compc17/p44\_cwcs104/files/44CWCS104.pdf)

### Size (IN.,CM)

10, 25

## Impedance (OHMS)

4 SVC

#### **Recommended Amplifier Power (watts RMS)**

250

#### Peak Power (watts, per ANSI/CTA-2031-A)

500

#### Sensitivity (dB 1w/1m)

86.2

#### Frequency Response (Hz)

30-500

#### Mounting Depth (in, cm)

4-13/16, 12.2

#### **Mounting Cutout (in, cm)**

9-1/8, 23.1

## Min Sealed Box Vol (cu. ft, L)

1.0, 28.3

#### Max Sealed Box Vol (cu. ft, L)

2.4, 68

### Min Vented Box Vol (cu. ft, L)

1.25, 35.4

## Max Vented Box Vol (cu. ft, L)

1.75, 49.6

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual developement, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

## You may also like these related products\* -



#### **43CWR10G**

10" CompR Grille

(10-inch-compr-grille)