


L7T12®



## RECOMMENDED AMP RMS POWER .

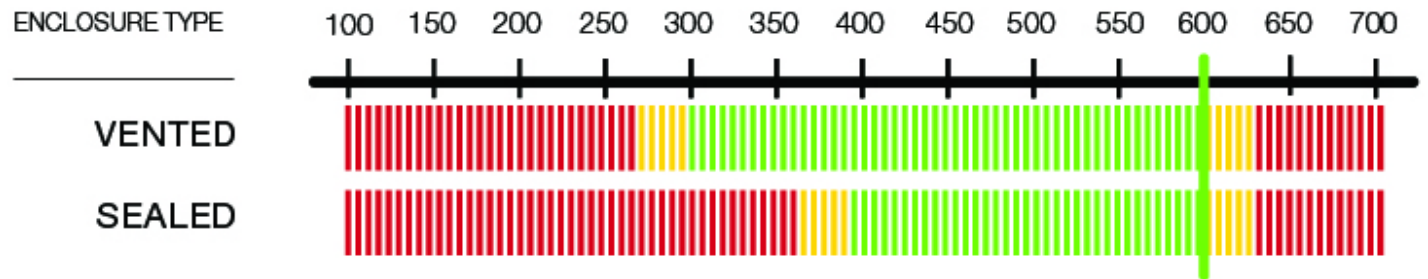

## Specifications

### Thiele/Small Parameters



**46L7T122** T/S Parameters PDF

(/app/products/caraudio/subs/solobaricl7t/p12\_inch\_l7t\_2\_ohm\_subwoofer/files/46L7T122.pdf)

### Size (IN.,CM)

12, 30

### Impedance (OHMS)

2 DVC

### Recommended Amplifier Power (watts RMS)

600

### Peak Power (watts, per ANSI/CTA-2031-A)

1200

### Sensitivity (dB 1w/1m)

86.54

### Frequency Response (Hz)

25-100

### Mounting Depth (IN.,CM)

4-1/8, 9.5

### Mounting Cutout, Square (IN.,CM)

11-1/16, 28.1

### Min Rec Sealed Box Volume (CU. FT., Liters)

.55, 15.6

### Max Rec Sealed Box Volume (CU. FT., Liters)

1.25, 35.4

**Min Rec Vented Box Volume (CU. Ft., Liters)\*\***

---

1.75, 49.6

**Max Rec Vented Box Volume (CU. Ft., Liters)\*\***

---

2.25, 63.7

**What's in the box?**

---

one 12-inch subwoofer, one owner's manual, two stickers

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

**You may also like these related products\***

---

**GL7120**

12" L7 Grille

(GL7120)