

**Thiele/Small Parameters**

---



41L7104 T/S Parameters PDF (</app/products/caraudio/subs/l7/p41l7104/files/41L7104.pdf>)

**Rated Impedance [ $\Omega$ ]**

---

4

**Fs [Hz]**

---

37.5

**Sensitivity [1W, 1m]**

---

85.9

**Qts**

---

0.507

**Qms**

---

9.791

**Qes**

---

0.535

**Re [ $\Omega$ ]**

---

7.9

**Vas [ft<sup>3</sup>, L]**

---

1, 28.32

**Recommended Amplifier Power (watts RMS)**

---

750

**Outer Frame Dimension [in, cm]**

---

10-11/16, 27.2

**Mounting Depth [in, cm]**

---

6-7/8, 17.5

**Mounting Cutout [in, cm]**

---

9-5/16, 23.7

**Frequency Response [Hz]**

---

24 - 100

**Sealed Enclosure Specs****Minimum Sealed Volume ft<sup>3</sup> (L)**

---

.8 (22.65)

**Maximum Sealed Volume ft<sup>3</sup> (L)**

---


1.25 (35.4)

**Panel Dimensions for Minimum Sealed Enclosures  
using 3/4" (1.9cm) thick MDF****Box Volume [ft<sup>3</sup>, L]**

---

---

.8 (22.65)

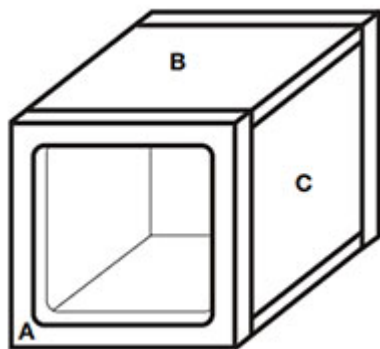


---

**Panel A [in, cm]**

13.5X13.5, 34.3X34.3

---

**Panel B [in, cm]**

13.5x9.5, 34.3x24.13

---

**Panel C [in, cm]**

12x9.5, 30.5x24.13

## Vented Compact

---

**Box Volume, ft<sup>3</sup> (L) + port displacement**

1.25 (35.4)

---

**Port Opening Size, in x in (cm x cm)**

2.5x11.25 (6.4x29)

---

**Port Length, in (cm)**

19.75 (50)

## Vented SQ

---

**Box Volume, ft<sup>3</sup> (L) + port displacement**

2.25 (63.7)

---

**Port Opening Size, in x in (cm x cm)**

3x11.25 (7.6x29)

---

**Port Length, in (cm)**

18 (46)

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

**You may also like these related products\*** \_\_\_\_\_