

Thiele/Small Parameters



41L7122 T/S Parameters PDF (/app/products/caraudio/subs/l7/p41l7122/files/41L7122.pdf)

Rated Impedance [Ω]

2

Fs [Hz]

34

Sensitivity [1W, 1m]

86.9

Qts

0.539

Qms

9.488

Qes

0.571

Re [Ω]

6.8

Vas [ft³, L]

1.92, 54.274

Recommended Amplifier Power (watts RMS)

900

Outer Frame Dimension [in, cm]

12-9/16, 32

Mounting Depth [in, cm]

7-7/8, 20

Mounting Cutout [in, cm]

11-1/16, 28.1

Frequency Response [Hz]

20 - 100

Sealed Enclosure Specs**Minimum Sealed Volume ft³ (L)**


1 (28.32)

Maximum Sealed Volume ft³ (L)

2 (56.64)

Panel Dimensions for Minimum Sealed Enclosures using 3/4" (1.9cm) thick MDF**Box Volume [ft³, L]**

 1 (28.32)

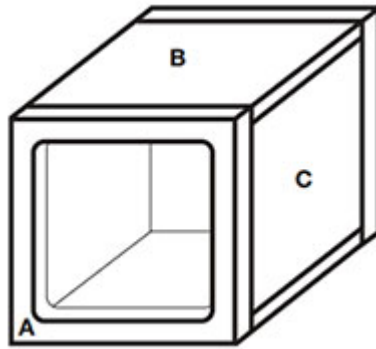

Panel A [in, cm]

13.5X13.5, 34.3X34.3

Panel B [in, cm]

13.5x12, 34.3x30.5

Panel C [in, cm]

12x12, 30.5x30.5

Vented Compact

Box Volume, ft³ (L) + port displacement

1.75 (49.6)

Port Opening Size, in x in (cm x cm)

2.5x13.25 (6.4x34)

Port Length, in (cm)

22.5 (57)

Vented SQ

Box Volume, ft³ (L) + port displacement

3.25 (92)

Port Opening Size, in x in (cm x cm)

3x13.25 (7.6x34)

Port Length, in (cm)

14.5 (37)

*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

**Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

You may also like these related products* _____