


# CWC12



## RECOMMENDED AMP RMS POWER

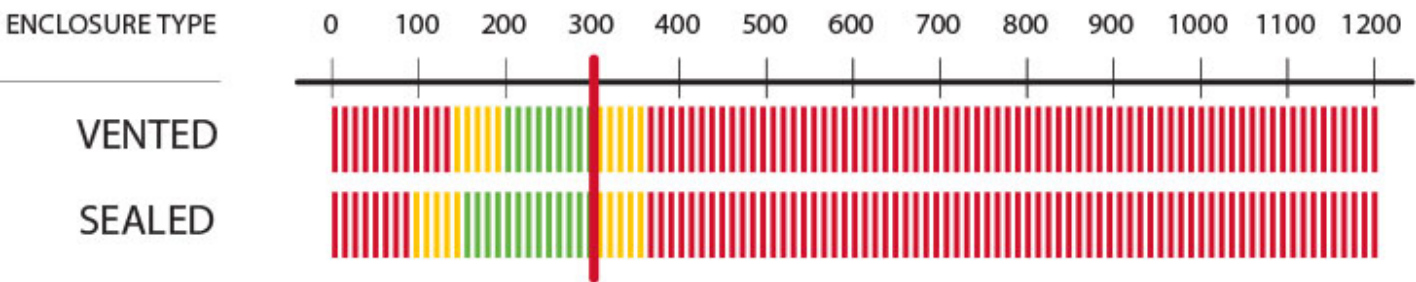

### Specifications

#### Thiele/Small Parameters



**44CWCS124** T/S Parameters PDF

(/app/products/caraudio/subs/compc17/p44\_cwcs124/files/44CWCS1284.pdf)

#### Size (IN.,CM)

12, 30

#### Impedance (OHMS)

4 SVC

#### Recommended Amplifier Power (watts RMS)

300

#### Peak Power (watts, per ANSI/CTA-2031-A)

600

#### Sensitivity (dB 1w/1m)

88.3

#### Frequency Response (Hz)

27-500

#### Mounting Depth (in, cm)

5-3/8, 13.6

#### Mounting Cutout (in, cm)

11, 27.9

#### Min Sealed Box Vol (cu. ft, L)

1.25, 35.4

#### Max Sealed Box Vol (cu. ft, L)

3.5, 99.1

**Min Vented Box Vol (cu. ft, L)**

1.75, 49.6

**Max Vented Box Vol (cu. ft, L)**

2.25, 63.7

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

**You may also like these related products\*****43CWR12G**

12" CompR Grille

(12-inch-compr-grille)