
# **CWC15**



## RECOMMENDED AMP RMS POWER.

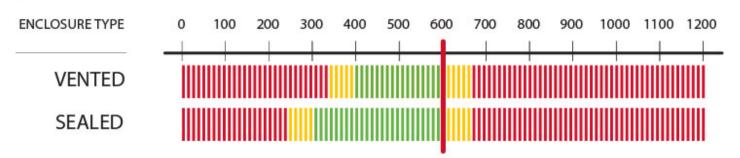

## **Specifications**

#### **Thiele/Small Parameters**



44CWCS154 T/S Parameters PDF

(/app/products/caraudio/subs/compc17/p44\_cwcs154/files/44CWCS154.pdf)

#### Size (IN.,CM)

15, 38

#### Impedance (OHMS)

4 SVC

#### **Recommended Amplifier Power (watts RMS)**

600

#### Peak Power (watts, per ANSI/CTA-2031-A)

1200

#### Sensitivity (dB 1w/1m)

90.3

#### Frequency Response (Hz)

25-500

#### Mounting Depth (in, cm)

7, 17.7

#### **Mounting Cutout (in, cm)**

13-3/4, 35

#### Min Sealed Box Vol (cu. ft, L)

2.25, 63.7

#### Max Sealed Box Vol (cu. ft, L)

5.0, 141.6

### Min Vented Box Vol (cu. ft, L)

3.0, 85

#### Max Vented Box Vol (cu. ft, L)

4.0, 113.3

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual developement, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

### You may also like these related products\* -



(15-inch-compr-grille)