
CWC8



# RECOMMENDED AMP RMS POWER

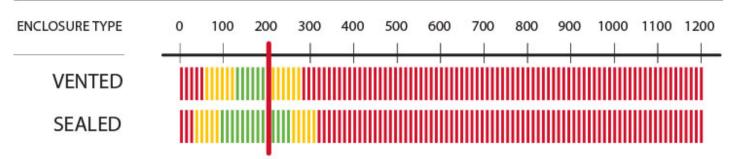

## **Specifications**

#### Thiele/Small Parameters



44CWCS84 T/S Parameters PDF (/app/products/caraudio/subs/compc17/p44\_cwcs84/files/44CWCS84.pdf)

#### Size (IN.,CM)

8, 20

## Impedance (OHMS)

4 SVC

## **Recommended Amplifier Power (watts RMS)**

200

#### Peak Power (watts, per ANSI/CTA-2031-A)

400

#### Sensitivity (dB 1w/1m)

85.6

## Mounting Depth (in, cm)

3-7/8, 9.8

## Mounting Diameter (in, cm)

7, 17.7

## Min Sealed Box Vol (cu. ft, L)

0.5, 14.2

#### Max Sealed Box Vol (cu. ft, L)

1.2, 34

#### Min Vented Box Vol (cu. ft, L)

0.66, 18.7

## Max Vented Box Vol (cu. ft, L)

1.2, 34

\*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

\*\*Port Volume Excluded.

Due to continual developement, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

## You may also like these related products\* -



## **43CWR8G**

8" CompR Grille

(8-inch-compr-grille)