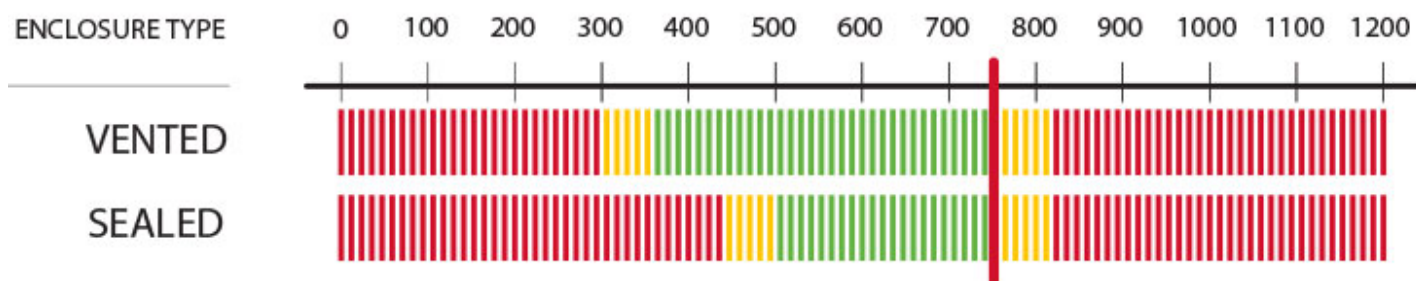


L7S12®**KICKER**
POWER METER**RECOMMENDED AMP RMS POWER .****Specifications****Thiele/Small Parameters****44L7S124** T/S Parameters PDF[\(/app/products/caraudio/subs/solobaricl7s/solo_baric_l7s_12_4_ohm_subwoofer/files/44L7S124.pdf\)](/app/products/caraudio/subs/solobaricl7s/solo_baric_l7s_12_4_ohm_subwoofer/files/44L7S124.pdf)**Size (IN.,CM)**

12, 30.5

Impedance (OHMS)

4 DVC

Recommended Amplifier Power (watts RMS)

750

Peak Power (watts, per ANSI/CTA-2031-A)

1500

Sensitivity (dB 1w/1m)

88.6

Frequency Response (Hz)

20-100

Mounting Depth (IN.,CM)

6-11/16, 16.9

Mounting Cutout, Square (IN.,CM)

11-1/16, 28.1

Min Rec Sealed Box Volume (CU. FT., Liters)

1.25, 35.4

Max Rec Sealed Box Volume (CU. FT., Liters)

2.0, 56.64

Min Rec Vented Box Volume (CU. Ft., Liters)**

1.75, 49.6

Max Rec Vented Box Volume (CU. Ft., Liters)**

3.25, 92.1

What's in the box?

one 12-inch subwoofer, one owner's manual, two stickers

*Assumes typical music program with minimal amplifier clipping; varies with enclosure size. See your KICKER dealer for details.

**Port Volume Excluded.

Due to continual development, product, and specifications are subject to change without notice. Stillwater Designs and it's agents are not responsible for typographical errors.

You may also like these related products*

**08GL712**

12" Square Grille

(08GL712)