

#### **SPECIFICATIONS**


SPECIFICATIONS		
Overall Width	29 3/4" (75.6 cm)	
Overall Height	19" (48.3 cm)	
Overall Depth	21 1/2" (54.6 cm)	
Oven Door Clearance	19" (48.3 cm) Min	
Overall Oven Interior Capacity	1.6 cu. ft. (.05 cu. cm)	
Oven Interior Dimensions (W x H x D)	20 1/16" × 8 1/2" × 17" (51 cm × 21.6 cm × 43.2 cm)	
Minimum Cabinet Width*	30" (76.2 cm)	
Minimum Cabinet Depth*	21 1/2" (54.6 cm)	
Minimum Base Support	130 lbs (59 kg)	
Cutout Width*	25 1/4" (64.1 cm) Min	
Cutout Height*	17 1/2" (44.5 cm) Min	
Cutout Depth*	21 1/2" (54.6 cm) Min	
Voltz/Hertz/Amps	120 VAC, 60 Hz, 15A	
Conduit Length	48" (121.9 cm)	
Electrical Rating	1.8 kW at 120V	
Total Amps	6.3 kW at 240V	
Shipping Weight	87 lbs (39.5 kg)	

<sup>\*</sup> Additional space will be needed for flush installation.


## ATTENTION ELECTRICIAN:


A 120V, 60Hz, 15 Amp circuit is required. An inidividual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

## **OVERALL DIMENSIONS**



FRONT VIEW (SHOWING CUTOUT OVERLAP)



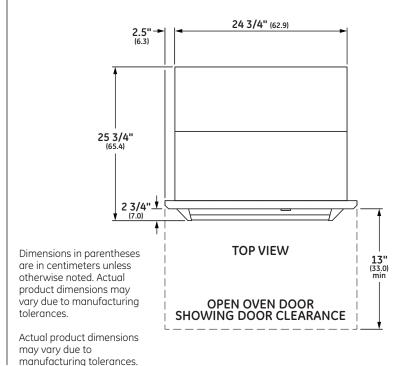


# WALL INSTALLATION **TOP VIEW** Side cleats 30 1/2" (77.5) flush inset width with 1/4" (0.6) reveals 23 1/2" min (59.7) cutout depth 21 1/2" min cutout depth В Top cleat ELECTRICAL 17 1/2' (44.5) 17 1/2' (44.5) 25 1/4" (64.1) cutout width **Bottom cleat** E D 32 1/2" (82.6) ecommende cutout location from floor Α **STANDARD FLUSH INSET FLUSH INSET INSTALLATION FRONT VIEW INSTALLATION** INSTALLATION

### **NOTES**

- A Based on a user height of 5' 6" to 5' 10"
- B Junction box location (May also be located in adjacent cabinet.)
- C Platform must be able to support 130 lbs (90 kg)
- D Top surface of cabinet must be an appearance finished surface for flush installation.
- E Cleats may be visible and should be finished to match cabinetry.
- F Maximum toe kick height of 4" when installed beneath a certified cooktop.

# **UNDERCOUNTER INSTALLATION**

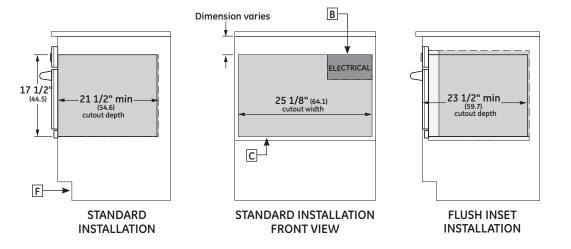

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

### **FEATURES AND BENEFITS**

**Remarkable versatility -** Multiple cooking options create four ovens in one--Speedcook, True European convection, sensor microwave and warming ovens -- to bake, broil, brown, roast and warm and proof food

**Speedcook technology -** Halogen light system combines with microwaves and speedcooks your favorite foods to delicious perfection in minutes, with no preheating

**Powerful performance -** Oven-quality foods cook up to four times faster than a conventional oven, with no preheating required

**Spacious interior -** Large 1.7-cu.-ft rounded oven cavity with 16" turntable allow full and continual rotation of a 9" x 13" casserole dish; removable oven rack offers the convenience of multi-level cooking

**Installation flexibility -** Ovens can be installed in 30" wall cabinet and can also be installed undercounter

**Professional styling -** Professional models exude power with a premium-grade stainless steel exterior, chamfered edges and a die-cast control knob





Client   GE Appliances		NOTES:
Job Number   Bill to 80345		8.5" x 11"
File Name   ZSC1202JSS_r3.indd		
Date   7/7/14		
MB Database   Quick Specs / Monogram / Advantium		
Operator   jv		
Art Director   Chris Colby		COLOR: ■ 4 Color □ Black
Art ACD   Chris Colby		□1 PMS □2 PMS □3 PMS
	AE:	Art ACD: Art Director:
POWERCREATIVE	Proofreader:	Writer ACD:

MB/ gea\_creative/ 0\_quick\_specs/ quick specs/ 2014\_Monogram/ wallovens (or appropriate product line subfolder)