

IT-30CIID



## FEATURES

Every Sub-Zero integrated refrigerator or freezer comes ready to be fitted with custom panels and handles for seamless installation with surrounding cabinetry

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Internal water dispenser works with seamless design

Over-and-under refrigerator/freezer storage

Nano-coated spill-proof shelves for easy clean-up

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Smart-touch controls for streamlined access to more settings

Water-filtration system reduces contaminants, chlorine taste and odor

Automatic ice maker with "max ice" feature

Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use

Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory

## ACCESSORIES

Dual installation kits

Stainless steel front panels with tubular or pro handles

Stainless steel kickplate

Stainless steel pro handles

Stainless steel tubular handles

Dozen egg container

Replacement air purification cartridge and water filter

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## HANDLE ACCESSORIES

PRO



TUBULAR



## PRODUCT DETAILS

### REFRIGERATOR

- 3 Adjustable glass shelves
- 1 Stationary shelf
- Crisper drawer with 2 adjustable dividers
- Adjustable dairy compartment
- 2 Adjustable door shelves
- 1 Stationary door shelf

### FREEZER

- 3 Adjustable drawer dividers
- Removable ice container
- Automatic ice maker

# 30" INTEGRATED OVER-AND-UNDER REFRIGERATOR/FREEZER WITH ICE MAKER AND INTERNAL DISPENSER - PANEL READY





## PRODUCT SPECIFICATIONS



Model	IT-30CIID
Dimensions	30"W x 84"H x 24"D
Door Clearance	28 1/2"
Drawer Clearance	18 3/8"
Weight	400 lb
Refrigerator Capacity	10.6 cu ft
Freezer Capacity	5 cu ft
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi

## ELECTRICAL

## PLUMBING




## DIMENSIONS

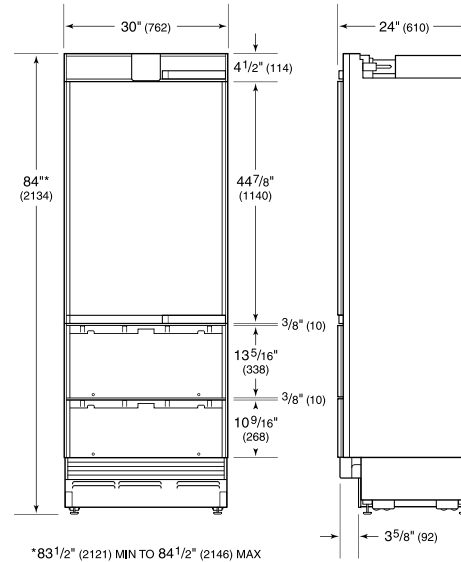

## PANEL SPECIFICATIONS


For complete panels specifications including width/height, weight requirements and thickness requirements visit [subzero-wolf.com/integratedconfigurator](http://subzero-wolf.com/integratedconfigurator).

## INTERIOR VIEW

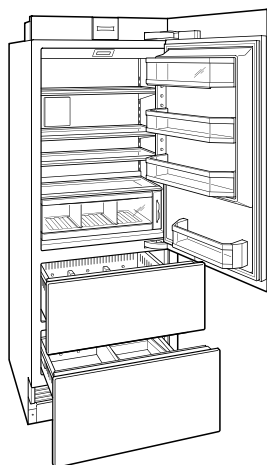

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

## STANDARD INSTALLATION

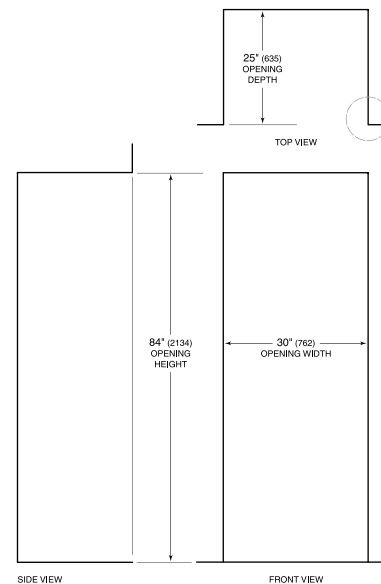

NOTE: 3/2" (89) finished returns will be visible and should be finished to match cabinetry.

