



Special Notes: Halogen lights. This model is not available with heat lamps. Shown with optional duct cover (sold separately). Optional duct covers are available in standard and custom sizes.


WIDTH:	36" 19 1/2"				
DEPTH:					
HEIGHT:	6"				
CFM:	250				
SONES:	7.4				
AMPS:	3.5				
# LIGHTS:	2				

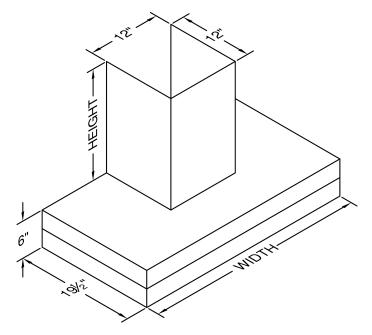


The VP521 transition is available for top vent applications at an additional charge.




## **CONNECTION DIAGRAM**

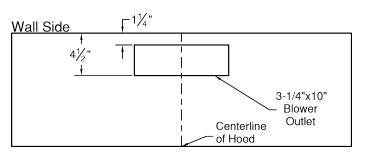



## **REC. MOUNTING HEIGHT\***



\* Exceeding recommended mounting height may compromise performance.

## **ELECTRICAL/MECHANICAL SPECIFICATIONS FOR BLOWER UNIT**

MODEL	VOLTS	AMPS+	HZ	RPM	CFM SP@0.0"	EQUIV CFM\$	CFM SP@0.1"	CFM SP@0.2"	CFM SP@0.3"	MIN. ROUND DUCT SIZE	SONES#	
K250 (Top Vent)	115	3.5	60	1550	250	375	223	220	190	7" (38 sq. in.)	7.4	

<sup>+</sup> This model is equipped with halogen lighting: (2 lights: 30" - 41", 3 lights: 42" - 48").

<sup>#</sup> Ratings in accordance with the Standard Test Code by the Energy Systems Laboratory of the Texas Engineering Experiment Station.



<sup>\$</sup> Because the Power Lung™ blower uses centrifugal filtration rather than conventional baffle or mesh filters, the Power Lung™ blower can handle cooking equipment with higher cubic feet per minute (CFM) requirements and can deliver equivalent CFM much more efficiently than other filtration systems. When comparing the Power Lung™ with other blower units made by other manufacturers, use the "Equivalent CFM".